

GOVERNMENT OF WEST BENGAL
DEPARTMENT OF HEALTH & FAMILY WELFARE
HEALTH SYSTEM DEVELOPMENT INITIATIVE
SWASTHYA BHAVAN, GN-29, SECTOR-III
SALT LAKE CITY, KOLKATA - 700091
TEL: 2357 4455

No. HI/W/ISDI/300/HHW-124/07

August 24, 2007

From: **A. K. Das, IAS**
Project Director, HSDI,
Commissioner, Family Welfare & Special Secretary

To: **The Project Officer, Health Wing**
SUDA,
Illgus Bhavan
Block-III, Sector-III
Salt Lake, Kolkata - 700091.

Sub: Approval to the selection, training and engagement of 23 additional nos. of Honorary Health Workers in respect of Honorary Health Worker Scheme in 11 KMA, ULBs.

Madam,

For proper implementation of Honorary Health Worker Scheme in 11 non-KMA Urban Bodies, it has been principally agreed that one HHW will be engaged for a population not exceeding 1000 BPL contained in a single ward and there will be atleast one HHW per ward irrespective of nos. of BPL population. The HHW will be responsible for both public health services and collection of health services data for the entire population of her ward wise jurisdiction.

For the aforesaid purpose, position of HHWs and no. of wards in different ULBs has been reviewed by the SUDA and it has been revealed that 23 (twenty three) Nos. of additional HHWs are required for 6 (six) ULBs to cover all the wards of the ULBs with atleast one HHW as detailed below:

Sl. No.	Municipality	No. of Ward without HHW
1.	Coochbehar	3
2.	Jangipur	1
3.	Suri	4
4.	Bolgur	4
5.	Bishnupur	5
6.	Kalna	6
TOTAL →		23

To achieve the goal of providing primary and public health care services to all the population, ward wise selection and engagement of Honorary Health Worker is felt essential. Accordingly the

GOVERNMENT OF WEST BENGAL
 DEPARTMENT OF HEALTH & FAMILY WELFARE
 HEALTH SYSTEM DEVELOPMENT INITIATIVE
 SWASTHYA BHAVAN, GN-29, SECTOR-IV
 SALT LAKE CITY, KOLKATA - 700091
TEL: 2357 4455

No.HFW/HSDI/299/Suda-Health/HHW-Scheme/32/07

August 23, 2007

From: A. K. Das, IAS
 Project Director, HSDI,
 Commissioner, Family Welfare & Special Secretary

To: The Project Officer, Health Wing
 SUDA,
 Illgus Bhavan
 Salt Lake, Kolkata - 700091.

Sub: Post-facto approval for construction / repair and renovations of Sub Health Posts in different Municipalities and concurrence to the re-appropriation of fund for the year 2006-07.

Sir,


In connection with implementation of Honorary Health Workers Scheme in 11 non-KMA Municipalities, this is to inform you that this Department have no objection to accord post-facto approval to the construction, repair and renovation of the Sub-Health Posts at an estimated cost of Rs. 5,46,052/- (Rupees five lakh forty six thousand fifty two) only as detailed below:-

1.	Construction of Toilet at one S.H.P at Bishnupur Municipality	Rs. 32,000.00
2.	Renovation of Sub Health Posts at Krishnanagar Municipality	Rs. 4,39,052.00
3.	Repair of S.H.P. at Berhampore Municipality	Rs. 72,000.00
TOTAL →		Rs. 5,46,052.00

Concurrence is also conveyed herewith to the proposed re-appropriation of fund to the tune of Rs. 5,46,052.00 (Rupees five lakh forty six thousand fifty two) only from the anticipated saving of the fund already released in your favour for meeting necessary expenditure on recurring items as per revised budget for the year 2006-07 vide order no. HFW/HSDI/13.37 Dated 18.01.07.

An item wise SOE and U.C. in respect of entire amount so far released in your favour may kindly be sent to the undersigned immediately.

Yours faithfully,



(A. K. Das)
 Project Director, HSDI, Commissioner, F.W.,
 & Special Secretary

Sub. : Details of plan & estimate for construction of Sub-Centre in respect of Honorary Health Worker Scheme in 11 Non-KMA ULBs.

Proposal for new construction of 50% of total Sub-Centre (27 nos.) has been kept in the revised project budget estimate for FY 2006-07 for an amount of Rs. 216.00 lakhs.

Apropos communication of Shri A.K. Das, Project Director (HSDI) and Special Secretary to the Govt. of West Bengal bearing no. IIIW/HSDI/13/07 dt. 18th January, 2007, the details of model plan prepared by Engineer, SUDA along with cost estimate for an amount of Rs. 6.73 lakhs in respect of construction of one Sub-Centre is placed herewith. Thus, the total cost involvement for construction of 27 nos. of Sub-Centre will be Rs. 181.71 lakhs. This cost estimate does not cover cost of land as land will be provided by the ULBs from their own resources. The construction will be done at ULB level by the ULB - Engineer. This has reference the Discussion with P.O (HSDI) held on 15.02.07 Submitted for kind approval of DHFW and release of necessary fund.

Director, SUDA

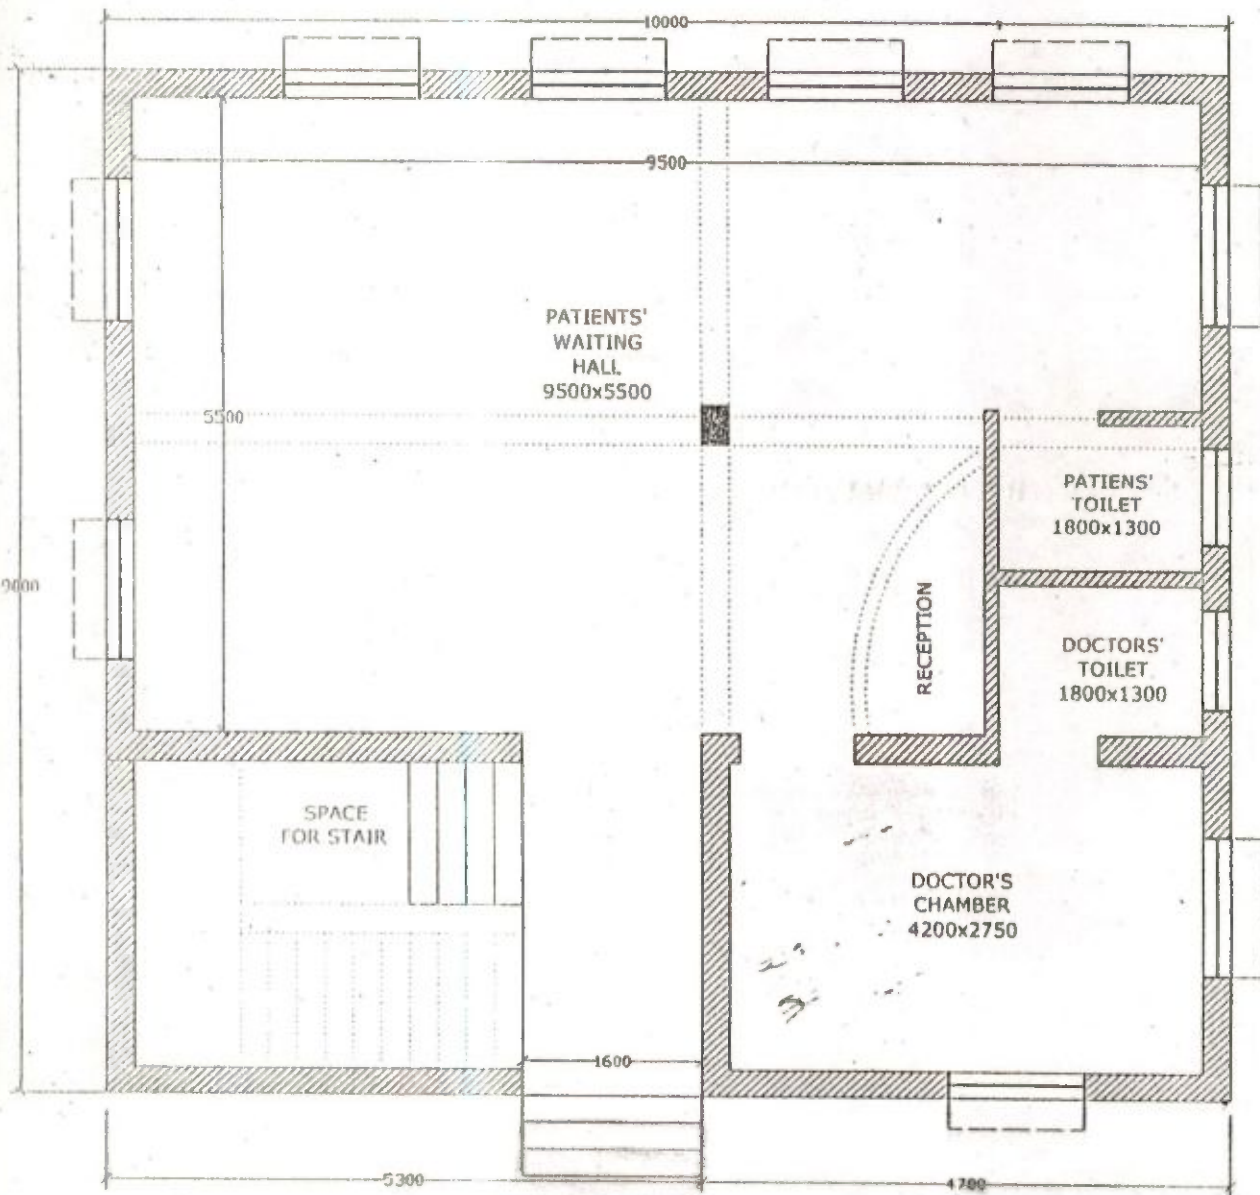
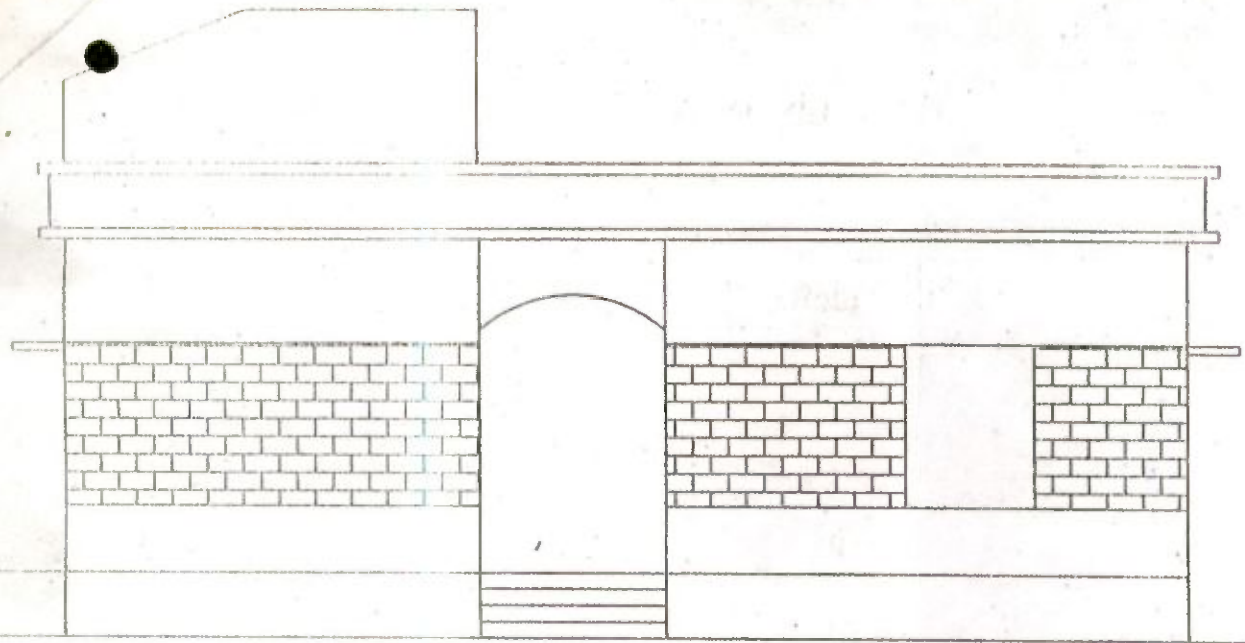
Dasgupta
12.04.07

Project Director (HSDI)
and Sp. Secy.
Health Wing Dept.

Notes foregoing.
Necessary fund for construction of sub-centre may kindly be placed at the disposal of SUDA.

Chinn
17/04/07

For the proposal submitted to DHFW for project for approval for an amount of Rs. 546 052/-



TYPICAL DRAWING
HEALTH SUB CENTRE
GIRTH AREA 90 sqm

127

COST ESTIMATE OF HEALTH SUB - CENTRE

Description	Quantity	Rate	Unit	Amount
Plinth area of the Civil Structure of the Center	90	6000	SqM	540000.00
				540000.00

Sanitary & Plumbing @ 5% of the Civil Cost 27000.00

Electrification @ 5% of the Civil Cost 27000.00

Sub - Total 594000.00

Add Contingency @ 3% of the Sub - Total 17820.00

Total cost of Consruction as per present market value 611820.00

Add @ 10% of Total Cost for Probable Price escalation 61182.00

673002.00

Say 673000.00

(Rupees six lakh seventy three thousand only)

SUDA

STATE URBAN DEVELOPMENT AGENCY

**HEALTH WING
"ILGUS BHAVAN"**

**H-C BLOCK, SECTOR-III, BIDHANNAGAR, CALCUTTA-700 091
West Bengal**

Ref No.SUDA-Health/DFID/07/93

Date31.08.2007

**From : Dr. Shibani Goswami
Project Officer
Health Wing, SUDA**

**To : The Chairman,
Berhampur Municipality**

**Sub. : Post facto approval for minor repair & renovation of Sub-Health Post in
respect of HHW Scheme at your ULB.**

Ref. : Your communication bearing memo no. 49/HHW/DFID/BM-07 dt. 23.02.07.


Sir,

This is to inform you that post facto approval and financial sanction for Rs. 72,000/- (Rupees Seventy two thousand) only has been accorded by the Dept. of Health & Family Welfare towards minor repair & renovation of Sub-Health Post, as sought for.

You are requested to book the expenditure under the A/C head "Renovation Works" and SOE be submitted accordingly along with duly authenticated Xerox copies of bills & vouchers to the undersigned by 17th September, 2007.

Thanking you.

Yours faithfully,



Project Officer

Dt. .. 31.08.2007

SUDA-Health/DFID/07/93/1(1)

Copy forwarded for kind information to :

Project Director, HHWs Scheme, Berhampur Municipality



Project Officer

Dt. .. 31.08.2007

SUDA-Health/DFID/07/93/2(1)

Copy forwarded for kind information to :

Finance Officer, Health, SUDA


Project Officer

SUDA

STATE URBAN DEVELOPMENT AGENCY

HEALTH WING
"ILGUS BHAVAN"

H-C BLOCK, SECTOR-III, BIDHANNAGAR, CALCUTTA-700 091
West Bengal

Ref No.SUDA:Health/DFID/07/94

Date31.08.2007

From : Dr. Shibani Goswami
Project Officer
Health Wing, SUDA

To : The Chairman,
Bishnupur Municipality

Sub. : Post facto approval for construction work of toilet at Kedarnath Giribala
Sebashram at Ward No. 7 in respect of HHW Scheme at your ULB.


Sir,

This is to inform you that post facto approval and financial sanction for Rs. 32,000/- (Rupees thirty two thousand) only has been accorded by the Dept. of Health & Family Welfare towards construction work of toilet at Kedarnath Giribala Sebashram at Ward No. 7, as sought for.

You are requested to book the expenditure under the A/C head "Renovation Works" and SOE be submitted accordingly along with duly authenticated Xerox copies of bills & vouchers to the undersigned by 17th September, 2007.

Thanking you.

Yours faithfully,


Project Officer

Dt. .. 31.08.2007

SUDA-Health/DFID/07/94/1(1)

Copy forwarded for kind information to :

Project Director, HHWs Scheme, Bishnupur Municipality


Project Officer

Dt. .. 31.08.2007

SUDA-Health/DFID/07/94/2(1)

Copy forwarded for kind information to :

Finance Officer, Health, SUDA


Project Officer

SUDA

STATE URBAN DEVELOPMENT AGENCY

**HEALTH WING
"ILGUS BHAVAN"**

**H-C BLOCK, SECTOR-III, BIDHANNAGAR, CALCUTTA-700 091
West Bengal**

Ref No.SUDA-Health/DFID/07/95

Date31.08.2007

**From : Dr. Shibani Goswami
Project Officer
Health Wing, SUDA**

**To : The Chairman,
Krishnagar Municipality**

**Sub. : Post facto approval for construction of renovation of Sub-Health Post in
respect of HHW Scheme at your ULB.**

Ref. : Your communication bearing memo no. 170/DFID/18-1(A)/2007 dt. 29.03.07.

Sir,

This is to inform you that post facto approval and financial sanction for Rs. 4,39,052/- (Rupees Four lakhs thirty nine thousand fifty two) only has been accorded by the Dept. of Health & Family Welfare towards renovation of Sub-Health Post, as sought for.

You are requested to book the expenditure under the A/C head "Renovation Works" and SOE be submitted accordingly along with duly authenticated Xerox copies of bills & vouchers to the undersigned by 17th September, 2007.

Thanking you.

Yours faithfully,



Project Officer

Dt. .. 31.08.2007

SUDA-Health/DFID/07/95/1(1)

Copy forwarded for kind information to :

Project Director, HHWs Scheme, Krishnagar Municipality



Project Officer

Dt. .. 31.08.2007

SUDA-Health/DFID/07/95/2(1)

Copy forwarded for kind information to :

Finance Officer, Health, SUDA


Project Officer

GOVERNMENT OF WEST BENGAL
DEPARTMENT OF HEALTH & FAMILY WELFARE
HEALTH SYSTEM DEVELOPMENT INITIATIVE
SWASTHYA BHAWAN, GN - 29, SECTOR - V
SALT LAKE CITY, KOLKATA - 700 091
TEL: 2357 4455

No.HFW/HSDI/299 /Suda-Health/HHW-Scheme/32/07

August 23, 2007

From: A. K. Das, IAS
Project Director, HSDI,
Commissioner, Family Welfare & Special Secretary



31 AUG 2007

To: The Project Officer, Health Wing
SUDA,
Illgus Bhavan
Salt Lake, Kolkata - 700091.

Sub: Post-facto approval for construction / repair and renovations of Sub Health Posts in different Municipalities and concurrence to the re-appropriation of fund for the year 2006-07.

Sir,

In connection with implementation of Honorary Health Worker's Scheme in 11 non-KMA Municipalities, this is to inform you that this Department have no objection to accord post-facto approval to the construction, repair and renovation of the Sub-Health Posts at an estimated cost of Rs. 5,46,052/- (Rupees five lakh forty six thousand fifty two) only as detailed below:-

- | | | |
|----|---|-----------------|
| 1. | Construction of Toilet at one S.H.P at Bishnupur Municipality | Rs. 32,000.00 |
| 2. | Renovation of Sub Health Posts at Krishnanagar Municipality | Rs. 4,39,052.00 |
| 3. | Repair of S.H.P. at Berhampore Municipality | Rs. 72,000.00 |

TOTAL → Rs. 5,46,052.00

Concurrence is also conveyed herewith to the proposed re-appropriation of fund to the tune of Rs. 5,46,052.00 (Rupees five lakh forty six thousand fifty two) only from the anticipated saving of the fund already released in your favour for meeting necessary expenditure on recurring items as per revised budget for the year 2006-07 vide order no. HFW/HSDI/13/07 dated 18.01.07.

An item wise SOE and U.C. in respect of entire amount so far released in your favour may kindly be sent to the undersigned immediately.

Yours faithfully,

(A. K. Das)

Project Director, HSDI, Commissioner, F.W.,
& Special Secretary

No.HFW/HSDI/299 /Suda-Health/HHW-Scheme/32/07/1(7)

August 23, 2007

Copy forwarded for information and necessary action to the:-

1. Secretary, MA Department, Government of West Bengal, Writers' Buildings, Kolkata – 700001.
2. Executive Director, West Bengal State Health and Family Welfare Samiti & Special Secretary.
3. Joint Director (Accounts), HSDI.
4. Accountant, HSDI.
5. Guard File.

(A. K. Das)
Project Director, HSDI, Commissioner, F.W.,
& Special Secretary

State Urban Development Agency, Health Wing, West Bengal

Sub. : Post facto approval for Minor repair & renovation of Sub-Health Posts (SHPs) by the ULBs in respect of Honorary Health Worker Scheme in 11 Non-KMA ULBs.

A budget provision had been kept during FY 2006-07 for renovation works for an amount of Rs. 5.60 lakhs in respect of Honorary Health Worker Scheme in 11 Non-KMA ULBs. In the communication of Project Director, HSDI and Special Secretary to the Govt. of West Bengal bearing no. HFW/HSDI/13/07 dt. 18th January, 2007 releasing the fund for Rs. 256.90 lakhs, it was indicated in Para-2 to submit details of Plans & estimates for repair & renovation of Sub-Centres. Subsequently, in the meeting with Project Director, HSDI, the same was discussed.

In anticipation of approval of the budget, the three ULBs have already undertaken repair & renovation of Sub Health Posts , as it was felt urgent to continue the service implementation. Krishnagar Municipality submitted plan for renovation works of the health post from where one Sub-Health Post and Municipal Management Cell are functioning. The Design , Drawing and Estimate for an amount of Rs. 4,39,052/- signed by the Engineer and Chairman of Krishnagar Municipality is enclosed at Annexure – I.

Repair work of 3 SHPs has been done by Berhampur Municipality for an amount of Rs. 75,000/- , bill has already cleared by the Municipality. Vide enclosure at Annexure –II reflecting cost break up signed by the Chairman, Berhampur Municipality.

Bishnupur Municipality has already undertaken construction work for toilet at one of SHPs at Kedarnath Giribala Sebashram at Ward No. 7. for an amount of Rs. 32,000/-. This was a basic facility required for examination of Antenatal mothers and other females for gynaecological examination. The related break up of the cost as per PWD schedule is enclosed at Annexure-III.

As the work had already been done prior to receive of your order dt. 18.01.2007, post facto approval may kindly be accorded.

Thus it will be seen that the total cost involved in the repair & renovation works is Rs. 5,46,052/- (Rupees Five lakhs forty six thousand fifty two) only.

The estimated budget during FY 2006-07 for renovation work had been kept for an amount of Rs. 5.60 lakhs. The required amount of Rs. 5,46,052/- is within the budget provision.

This expenditure can be well accommodated from the fund of Rs. 256.90 Lakhs released by you vide memo no. HFW/HSDI/13/07dt. 18th January , 2007.

Submitted for kind consideration and grant of post facto approval.

[Signature]
17.7.07

SUDA - Health Wing
Scheme / 3
17.7.07

F.C. to cc. P. C. etc.
Phon No. 250012 / 251299

Berhampore Municipality

DFID Assisted Honorary Health Worker Scheme

Memo No. 49/HHW/DFID/IBM-07

Date 23.02.07

To
Dr. Shibani Goswami
Project Officer
Health Wing SUDA
Ilgus Bhavan H.C Block
Sector III Bidhannagar
Cal-700091



28 FEB 2007

Sub.- Request for passing U.C of January 07 relating refurbication work.
Ref:- Telephonic Discussion on 21.2.07

Madam.

With reference to above I am to intimate you that as per your direction I sent three estimate for refurbication works of SHP No4,5& 6 considering the condition of the building amounting rupees 95717.00. The roof of all 3SHP were badly damaged. Rain water were leaking through out the most places of the roof. There were no cementing floor. The door and window were broken for want of long untouched repair. Considering the situation 3 estimate were prepared by our engineering see and sent to you vide this office no 67 HHW DFIDdt 12.6.06.

On this contest I requested you to release 75000 -seventy five thousand only for SHP refurbication of SHP vide this office memo 51 DFID.HHW scheme dt 28.4.06. Over phone you directed to carry out the work. I departmentally started the work of SHP 4,5,6 and completed the work. So I sent U/C reflecting the expenditure in January 07. The work was completed September 06. Expenditure has already been posted in the cash book of January 07. For that I am requesting you to kindly accept the expenditure as shown in the U/C of January 07. I have stopped all the work of "refurbication of other SHP. The original estimate along with the zerox copes of the letter is enclosed here with. Your kind approval is solicited.

Yours Faithfully

Chairman & President
M.L.H & F.W.C
Berhampore Municipality

Berhampore Municipality

DFID Assisted Honorary Health Worker Scheme

Memo No. 51/DFID / H.H.W. Scheme

Date 28/4/07

To
Dr. Shibani Goswami
Project Officer, Health Wing, DFID
ILGUS Bhawan, Sector - III
Bidhannagar, Kolkata.


Sub :- Proposal for allotment of fund for refurbication
of H.P. and S.H.P. for the year 2006-2007.

Madam,

This is to inform you that there are one H.P and eight S.H.P in this Municipality. Three number of S.H.P at the time of starting in Municipal Primary School has been refurbicated by the Chairman from his own Municipality fund. No refurbication could not be done of the remaining S.H.P & H.P. Though an amount of Rs. 19000/- was sanctioned in last year.

In view of the fact arrangement may kindly be made for allotment of Rs. 75,000/- for the refurbication and renovation of one H.P and five S.H.P of this Municipality for the year 2006-2007.

Yours faithfully,


Chairman

Berhampore Municipality.
Chairman and President
Berhampore Municipality
M. L. H. and F. W. C.

Mem No 67/441/2012 dt 12-6-06

To
Dr. Shibani Goswami
Project Officer
Health wing SUDA
Ilgus Bhavan H.C. Block
Sector III Bidhan nagar
Cakutta 700091

Sub:- Proposal for allotment of fund for refurbication
of H.P and SHP during the year 2006 under DFID
assisted Honorary Health worker Scheme.

Madam,

With reference to above I am furnishing herewith the
details of refurbication works along with cost Estimate
as per format given below:

1. SL No.	Add of Health Facility -HP/SHP	Work details for each work	Total Cost of Estimate
1.	Berhampore puro Prathamik vidyalaya (SHP-No 5)	Detail estimate valuation	18,659.00
2.	Gorabazar puro Prathamik vidyalaya (SHP-No 4)	Do - Do	74,020.00
3.	Khagra Puro prathamik Vidyalaya(SHP-No 6)	Do	20,560.00
			95717.00

The Building condition of the SHP No 4& 5 are very poor. The condition of Roof is very bad. Entrance doors and windows have to be changed as because it is beyond repairable. The floor of SHP 4 shall have to be constructed Entire piaster works painting of door & window have to be done. Estimate is prepared on the base of P.WD Schedule. So you are requested to kindly sanction the amount 96000/- (ninety six thousand only) and send the allotment grant to this Office as early as possible. Estimate for other SHP/HP/MMC Office will be send later on.

Yours faithfully

[Signature]
Chairman and President
Berhampore Municipality
M. L. H. and F. W. C.
[Signature]

Enclosed -3 Estimate

FILE FOR THE SPECIAL REPAIR OF
 AT BERHAMPUR: MURSHIDABAD DISTRICT
 (H.E.N./DETD)

PRO PRATHAMIK VIDYALAY
 WARD HEAD
 No. 6

1.	Iron Socket bolt of approved quality fitted and fixed complete Qty. 17 Nos. @ Rs.21.00 each	357.00
2.	Iron hasp bolt of approved quality fitted and fixed complete (oxidised) with 16mm. dia rod with centre bolt and round fitting. Qty. 3 Nos. @ Rs.80.00 each	240.00
3.	Single coat white washing including cleaning and smoothing surface thoroughly (5 Parts of stone lime and 1 part of shell lime should be used in the finishing coat) Qty. 130.95 Sq.mt. @ Rs.244.00 $\frac{1}{2}$ M ²	319.52
4.	Colour washing with 'ELLA' on a coat of white washing priming including cleaning & Smoothing Qty. 130.95 M ² @ Rs.550.00 % M ³	720.23
5.	Supplying best Indian Sheet Glass Panes Set in putty and fitted and fixed with nails and putty complete in all floors ii) 3mm thick (weighing 7.4 Kg per Sq.m.) Qty. 1.5M ² @ Rs.313.00 / M ²	469.50
6.	Plaster to all floor ceiling etc. with sand & cement mortar including pounding off or chattering corners as directed and racking out joints or roughness as concrete surface including throating, nosing and drop course where necessary (G.F.) 20mm. thick (6:1) Plaster. Qty. 91.45 M ² @ Rs.60.00 / M ² Qty. 6.3M ² @ Rs.35.00 / M ²	567.00 220.50
		<u>2,893.52</u>
	Add: 5% Contingency	144.67
		<u>3,038.19</u>

(Rupees three thousand thirtyeight only)

Chairman and President
 Berhampore Municipality
 M. L. H. (and F. W. G.)

Estimate for the Special Repair of Primary School
 Building named "Kha^{Khagra}gra/Pouro Prathar & Abaitanik Vidyalay"
 at Netaji Road, Khagra, Mad. *Sl. P. No. 5*

Chargeble Head (H.H.W. / DFID) Scheme.

Sl. No.	Description of Items :	Quantity :	Rate: Rs.	Amount : Rs.
1)	Dismantling Carefully tarraced floor (including floor finish only) or lime terracing in ground floor roof and remaining rubish as directed within a lead of 75m upto 150mm thickness.	0.794 m ³	236.00/m ³ Rs.	187.38
2)	Nominal mix cement Conc. with graded stone chips (20 mm size) excluding shutterings and reinforcement if any in ground floor.	0794 m ³	2789.00/m ³ Rs.	2214.46
3)	Striping off warn out plaster and raking out joints of Walls, ceiling etc. upto only hight and in any floor including removing rubish and staking any where within the compound as directed.	102.92 m ²	5.80 m ² Rs.	596.93
4)	Labour for taking out doors & windows frame with or without norms and including shutter for repair or replacement of different parts of the frame and refixing the same including mending good all damages complete.	4 Nos.	60.00/eachRs.	240.00

Contd...P/2.

Description of Items :

Quantity:

Rate:
Rs.

Amount :
Rs.

5) Plaster to wall floor ceiling etc. with sand & cement mortar including rounding off or chufering corners as ~~directed and racking out joints or~~ roughness as comcuret surface including throating, roiseg. & drip course where necessary.

a) 20mm thick plaster.	89.54 m ²	60.00/m ² Rs.	537.24
c) 6 mm. thick C.plaster.	13.38 m ²	35.00/m ² Rs.	468.30

6) Wood work in doors and windows frame fitted and fixed complete including a protective coat of painting at the contact surface of frame .

Sal/Siliguri.

	0.1416 m ³	42777.00 m ³ Rs.	6057.22
--	-----------------------	-----------------------------	---------

7) ~~Z button shutters of doors & windows~~ as per draigen having tougued and groove half lap jointed as per description of the Engineers in Charge including fitting funing shutter in position, but excluding the cost of hinges and other fitting in Gr. floor.

	1.5562 m ²	1494.00/m ² Rs.	2324.96
--	-----------------------	----------------------------	---------


Contd...P/3.

Description of Items :	Quantity:	Rate. Rs.	Amount Rs.
9) MS clamp for fixing doors and windows frame made of flat bend bar fiber cated fixed in cement concrete with stone chips (4:2:1) fitted and fixed complete as per direction.	18 Nos.	22.00 each Rs.	396
10) Iron butt hinges of approved quality fitted and fixed with sted screws, with ISI mark.	38 Nos.	16.00 each Rs.	608
11) Iron socket bolt of approved quality fitted and fixed complete.	12 Nos.	21.00 each Rs.	252
12) Taking out old iron hinges and fitting fixing the same with new steel screws .	16 Nos.	9.00/each Rs.	144.
13) Iron hasp bolt of approved quality fitted and fixed complete(oxidised) with 16 mm dia rod with centre bolt and round fitting.	1 No.	80.00/each Rs.	80.
14) Ornamental MS Grill of approved design joints continuously welded with M.S. W.I. flats and bars for windows reiling etc. fitted and fixed with necessary screws and legs in gr. floor.	3.57 m ²	36.00	Rs. 1999.

No.	Description of Items :	Quantity :	Rate: Rs.	Amount: Rs.
15)	Single coat white washing including cleaning and smoothing surface thoroughly (5 parts of stone lime and 1 part of shell lime should be used in the finishing coat).	103.02 m ²	244.0/m ² Rs.	251.36
16)	Painting with best quality synthetic enamel paint of approved make and brand including smoothing surface by sand reparing etc. including using of approved putty etc on the surface if necessary.	13.07 m ²	41.01 m ² Rs.	533.00
17)	Colour washing with "ELLA" on a coat of white washing priming including during Exsmoothing.	103.02 m ²	550.0/m ² Rs.	566.61
18)	Supplying fitting fixing glass panes 3mm thick and area of each not exceeding 0.4 m² set in putty and fixed complete.	1.66 Sqm.	297.50/SqmRs.	493.85
				Rs.17,770.51
			Add : 5% Contengency -	Rs. 888.52
				Rs.18,659.03
			Say -	Rs.18,659.00

(Rupees Eighteen thousand Six hundred fifty nine only).

PREPARED BY :


 Chairman and President
 Berhampore Municipality
 M. L. H. and P. W. C.

imate for the Special Repair of the
amed "Garabazar Pouro Prathamik Abaitanik

Chargeble Head (H.H.W./D.P.I.F)

51/P/1/4

Sl. No.	Description of Items :	Quantity :	Rate: Rs.	Amount: Rs.
1.	Dismantling carefully tarraced floor (including floor finish only) or lime terracing in ground floor roof and remaining rubbish as directed within a lead of 75m upto 150 mm. thickness.			
	Floor	3.762 m ³	@ Rs.236.00/m ³	Rs. 887.83
	Roof	1.189 m ³	@ Rs.236.00m ³	Rs. 280.60
2.	Single brick flat soling of picked jhama bricks including ramming & dressing to powdered earth as local sand.	37.62 m ²	@ Rs.78.00/m ²	Rs. 2934.36
3.	Cement Conc. with graded stone ballast (40mm size) excluding shutterings.			
	a) In Gr.floor (6:3:1)	3.762 m ³	@ Rs.2049.0/m ³	Rs. 7708.34
4.	Artificial stone flooring, dado, staircase etc. with cement concrete (4:2:1) with stone chips laid in panels as directed with topin made with ordinary or white cement(as necessary) and marble dust inproportion (2:1) including smooth & finishing and rounding corner and including application of cement @ 1:75 Kg./sqro. all complete including all meterials and labour . In Gr. floor.			
	3 mm thick taping(high polishing grinding on this item is not permitted) with ordinary cement).			
	1) 20mm thick (floor).	37.62 m ²	@ Rs.64.00/m ²	Rs. 2407.68
	2) Roof -	47.59 m ²	@ Rs.70.00/m ²	Rs. 3331.30

Contd...P/2.

Description of Items :	Quantity :	Rate :	Amount :
		Rs.	Rs.

5. Labour for taking out doors & windows frame with or without horns and including shutter for repair or replacement of different parts of the frame and refixing the same including mending good all damages complete.

a) Frame with horns 8 Nos. 60.00/each Rs. 480.00

6. Dismantling all types of masonry excepting cement concrete plain of reinforced staking survicable materials at site and removing rubbish as directed within a lead of 75 m.

0.343 m³ 132.00/m³ Rs. 45.28

7. Reinforcement for cement Conc. in all sorts of structures, including distribution bars stirrups, binders etc.

including supply of rods innitial straightning & removal of loose rust, cutting to requisite seze hooking and bending to currect shape placing in proper polithin & binding with 16 guage black wine in every inter section as per drawing & drwp on. 0.60 Qntl. 3200.00/Qnt. Rs. 1920.00

8. Hire and labour charges for shuttering & Centerings and necessary staging upto 4 M. using approved stout props. and thick hard wood. Planks of approved Thickness with required bracing of Conc. Slab, beam, collumm lintels. etc....

8.12 m² 92.00/m² Rs. 747.04

Contd....P/3.

Description of Items :

Quantity :

Rate :
Rs.

Amount :
Rs.

Nominal mix cement conc. with graded stone chips (20 mm size) excluding shutterings and reinforcement if any in ground floor.

Pakur/Chandi Variety -

Lintel

0.343 m³

2789.0/m³ Rs.

956.63

Sunshed

0.100 m³

2789.0/m³ Rs.

2789.00

10. Collapsible gate with 40mm x 40mm x 6mm tee as top and bottom guide rail 20mm x 10mm x 2mm vertical channels 100mm apart in fully stretched position 20mm x 5mm MS flat as collapsible bracing properly revetted and washered including 38mm steel rollers including locking arrangements fitted and fixed in position with lugs. set in cement ~~conc. and including cutting necessary~~ holes, chasing etc. in walls, floors etc. and making good damages complete.

In gr.floor.

4.23 m²

1578.0/m² Rs.

6674.94

11. Wood-work in doors & windows frame fitted and fixed complete including a protective coat of painting at the contact surface of the frame.

Sal/Siliguri -

a) Doors

0.037 m³

b) Windows

0.126 m³

0.163 m³

42777.00

Rs.

6972.65

Contd...P/4.

Description of Items :	Quantity :	Rate :	Amount : Rs.
12. Z buttom shutters of doors & windows as per design having tongued and groove half lap jointed as per description of the Engineer in charge including fitting fixing shutter in position, but excluding the cost of hinges and other fittings in gr. fllor.			
Gamari -			
a) Windows	3.192 m ²	1494.00/m ² Rs.	4768.00
b) Doors	1.656 m ²	1494.00/m ² Rs.	2474.00
13. MS damp for fixing doors and windows frame made of flat bend bar befercated fixed in cement conc. with stone chips (4:2:1) fitted and fixed complete as per d&rection.			
a) 40mmx6mm above 170mm upto 250mm length.			
	38 Nos.	22.00 eachRs.	836.00
14. Iron butt hinges of approved quality fitted and fixed with steel screws with ISI Mark.			
100mm x 50mm x 1.25mm.			
	16 Nos.	38.00/eachRs.	608.00
15. Iron socket bolt of approved quality fitted & fixed complete.			
a) Window 100mm long x 10mm dia bolt.			
	10 Nos.	21.00/eachRs.	210.00
b) Doors 150mm long x 10mm dia bolt			
	3 Nos.	29.00/eachRs.	87.00

Contd....P/5.

Description of Items :	Quantity:	Rate : Rs.	Amount : Rs.
16. Taking out old Iron hinges and fitting fixing the same with new steel screws.			
a) Windows 100mm long 20	20 Nos.	9.00/eachRs.	180.00
b) Doors 150mm long	18 Nos.	10.00/eachRs.	180.00
17. Striping off warn out plaster and raking out joints of walls, ceiling etc. upto only hight and in any floor including removing rubish and staking anywhere within the compound as directed.	219.94 m ²	580/m² Rs.	1275.65
18. Iron hasp bolt of approved quality fitted and fixed complete (Oxidesed) with 16mm dia rod with centre bolt and round fitted fitting.			
b) 250mm long	3 No.	80.00/eachRs.	240.00
19. Plaster to wall floor ceiling etc. with sand & cement mortar including rouding off or chafering comers as directed and racking out joints or roughness of concrete surface including throating, nosing and drip course where necessary (G.F.).			
20mm thick (6:1) plaster.	219.94 m ²	60.00/m ² Rs.	13196.40

Contd....P/6.

Description of Items :	Quantity:	Rate: Rs.	Amount : Rs.
20. Paints with best quality Cynthetic enamel paint of approved marked & brand including smoothing surface by sand papers etc. including using of approved putty etc. on the surface if necessary. On timber/plaster surface. Two coats -	28.44 m ²	41.00/m ² Rs.	1166.04
21. Neat cement punning about 1.5 mm thick in wall, dado, window, sills, floor, drain etc.	10.30 m ²	12.00/m ² Rs.	123.60
22. Oil bound distemper (Synthetic) to interior wall ceiling with a coat of priming(as per manufacture's specification) including cleaning and smoothening surface(two coats).	115.41 m ²	25.00/m ² Rs.	2885.25
23. White washing including cleaning and smoothening surface thoroughly(sperts of stone lime and (part of shell lime should be used in the finishing coat). All floor -	94.27 m ²	24400/100m ² Rs.	230.01
24. Colour washing with "ELLA" with a coat of white wash priming including cleaning and smoothening surface thoroughly. External surface (Ground floor).	94.27 m ²	550.00/100 m ² Rs.	518.49

Contd...P/7.

Description of Items :

Quantity :

Rate.
Rs.

Amount :
Rs.

25. MS Grill ornamental of approved design joints continuously welded with MS., W,1, flats and bars for windows railing etc. fitted and fixed with necessary screws and lugs in gr.floor. Grill wining upto 16 kg./sqm. 68.32 Kg. 35.00/kg.Rs. 2391.12

26. ~~Painting with best quality synthetic~~ enamel cement paint of approved make and brand including smoothing surface by sand papering etc. including using of approved putty on the surface if necessary.

a) On timber surface

28.62 m²

24.00 Rs.

686.88

b) On steel surface (Grill)

4.27 m²

" " "(Collapsible)

4.23 "

8.5 @ Rs.

24.00 Rs.

204.00

Add : for 5% Contigency -

(+)

Rs.70,496.09

Rs. 3,524.80

Rs.74,20.89

Rs.74,020.00

(Rupees Seventy-four thousand & twenty only).

Say -

PREPARED BY :

[Signature]
Chairman and President
Champore Municipality
L. H. and P. W. G.

[Signature]

STD Code : 03244
Office : 252073 / 252591
Tourist Complex : 252200

OFFICE OF THE COUNCILLORS OF BISHNUPUR MUNICIPALITY

No.....

Date, Bishnupur, the.....200

ESTIMATE FOR CONSTRUCTION OF BATH CUM W.C. UNDER THE OFFICE OF BISHNUPUR MUNICIPALITY.

Item No.	Description of Item.	Quantity	Rate.	Amount.
1.	Earth work in excavation of foundation trenches at all sorts of soil (including mixed soil but excluding laterite or sand stone; including removing spreading or stacking the spoils within a lead of 75 meters as directed.	4.00 M ³	Rs. 27.23/M ³	Rs. 108=92
2.	Sand filling in foundation trenches with removing ramming saturation with water consolidation upto 15cm	1.08 M ³	Rs. 163=20/M ³	Rs. 176=25
3.	Single brick flat setting with Dhams bricks or 1st class bricks including removing ramming, dressing and falling joints with local sand or earth.	8.58 M ²	Rs. 84.00/M ²	Rs. 772=20
4.	Earth work in filling in foundation trenches or width with good earth in layer not exceeding 150mm including watering and ramming etc. layer by layers completed.	5.00 M ³	Rs. 19/M ³	Rs. 95=00
5.	Cement concrete with graded stone ballast (40mm size) (6:3:1) excluding shuttering.	1.28 M ³	Rs. 1855/M ³	Rs. 2,348=80
6.	Brick work in foundation with 1st class bricks with cement mortar (6:1) etc.	3.68 M ³	Rs. 1494/M ³	Rs. 5,497=92
7.	25mm thick U.P.C. with stone chip (4:2:1) and admixture of water proofing compound as per manufacture.	3.50 M ²	Rs. 77/M ²	Rs. 276=50
8.	Brick work in super structure with 1st class bricks with cement mortar (6:1) etc.	6.00 M ³	Rs. 1559/M ³	Rs. 9,354=00
9.	Hire and labour charges for shuttering with central staging with prop upto 4m for concrete of roof slab, lintel, chajja etc.	10 M ²	Rs. 105/M ²	Rs. 1,050=00
				Rs. 19,679=59

STD Code : 03244
Office : 252073 / 252591
Tourist Complex : 252200

OFFICE OF THE COUNCILLORS OF BISHNUPUR MUNICIPALITY

Dated, Bishnupur, the200

Page, 2.

Item No.	Description of Item.	Quantity	Rate.	Amount.
			B.F.	Rs. 19,679=59
10	Reinforcement for reinforced-concrete works in all sorts of structures including distribution bars, stirrup binders etc including of supply of removal of loose, rust cutting to requisite length hooking and bending to correct shape.	0.90 RT	Rs. 32=00Kg.	Rs. 2,880=00
11.	Cement concrete(4:2:1) with graded stone chip 20mm size excluding shuttering and reinforcement with best hard black stone chip (Dusher broken)	0.95 M ³	Rs. 2105/M ³	Rs. 1,999=75
12.	Cement plaster with cement mortar(4:1) etc. 15mm thick(4:1) 10mm thick(4:1)	90 M ² 3.25 M	Rs. 50/M ² Rs. 40/M ²	Rs. 4,000=00 Rs. 130=00
13.	25mm thick A.S. floor, bedded with stone chips with(4:2:1) with cement plaster with Neet-finishing as directed with topping made in(2:1) 3mm High polishing grinding etc.	3.18 M ²	Rs. 92/M ²	Rs. 292=56
14.	Neet cement punning in wall.	15 M ²	Rs. 13/M ²	Rs. 195=00
	<u>Sanitary fittings.</u>			
15.	Supplying fitting, fixing approved asbestos cement quality down pipe in position with necessary clamps nails including making hole in wall floor.	4.00 meter	Rs. 51/meter	Rs. 204=00
16.	Shallow water closet Indian pattern(1.P.W.E) of approved make in white vitreous chinaware supplied fitted fixed in position 500mm long.		Rs. 449/each	Rs. 449=00
17.	pedestal s.por purdon type water closet in white vitreous china ware of approved make with gas trap with or without vent supplied fitted and fixed in position complete.		Rs. 979/each	Rs. 979=00
18.	Colour washing with pigments of any shade with a coat of white wash priming including cleaning and smoothing surface. -two coats colour wash.	40 M ²	Rs. 5.41/M ²	Rs. 216=40 <u>Rs. 31,025=26</u>

10
GL
10

STD Code : 03244
Office : 252073 / 252591
Tourist Complex : 252200



ICE OF THE COUNCILLORS OF BISHNUPUR MUNICIPALITY

No.....

Dated, Bishnupur, the200

Page, 3.

Item No.	Description of Item	Quantity	Rate	Amount
19.	Construction of plain sheeted (10.90 x 1.80) m. with wooden frame including fitting all materials like go butt hinge dooring etc. in each room	L.		Rs. 600=00
20.	Construction of concrete (1.45) size including fitting fixing etc.	L.		Rs. 150=00
21.	Removing earth rubbish from working site by labour and site clearance.	L.		Rs. 300=00
				Rs. 32,075=26
				Rs. 32,075=00

d. day/-

Handwritten signature and notes

Handwritten signature
Chairman,
Bishnupur Municipality

KRISHNAGAR MUNICIPALITY

KRISHNAGAR - 741101

STD : (95)03472
Office : 252926
Office (Account Sec.) : 258134
Chairman Resi : 254111
Water Works : 252985
Tourist Lodge : 252080
Chairman's Office }
Chamber & } 252455
Fax No. }



Memo No. 170/DFID/18-1(A)2007

Date 29.03.07

CHAIRMAN IN COUNCIL

Chairman

UDAY KUMAR MITRA

Vice - Chairman

ASHIM SAHA

Members :

SAJAL BIKASH BHADAR

DILIP SARMA

SUPRAVAT GHOSH

Resl : 254111 & 253596

Resl : 224111

Off. - 252240

9434129345 (M)

Resl : 252989

To
Dr. Shibani Goswami
Project Officer,
SUDA-Health Wing,
ILGUS BHAVAN
Kol:- 91

Sub:- Earnest appeal for the sanction of the payment of the boundary wall of the Health Post of the DFID Assisted HHW Scheme, Krishnagar Municipality as Ex-post-facto approval.

Respected Madam,

We have already done a construction work of a boundary wall of the Health Post of the DFID Assisted HHW Scheme, Krishnagar Municipality. It was really very essential to resist the free access of the outsiders and to make well protection to keep furniture, equipments and medicines of huge amount as per project guide line. Please note that our Health Post is neither situated within Municipal premises nor in MMC(Municipal Management Cell). As a result, the work was very essential to protect the property and medicines of the said project.

We shall be highly obliged and grateful too if you kindly sanction the done work as Ex-post-facto approval. The related all the papers of the said work are enclosed here which may kindly be noted.

Sd/-

Chairman
Krishnagar Municipality.

MEMO No - 170(5)/DFID/18-1(A)2007. DATE - 29.03.2007

Copy forwarded for information and to take the necessary action to :-

1. Project Director, ADM(G), Nadia.
2. Sri Sashi Gopal Sarkar, Councilor-in-Charge of Health, Krishnagar Municipality.
3. Sri Debabrota Biswas, T.P.O., Krishnagar Municipality.
4. Dr. Asim Kr. Joardar, C.D.O., DFID Assisted HHW Scheme, Krishnagar Municipality.
5. Sri Somnath Roy, Accounts Assistant, DFID Assisted HHW Scheme, Krishnagar Municipality.

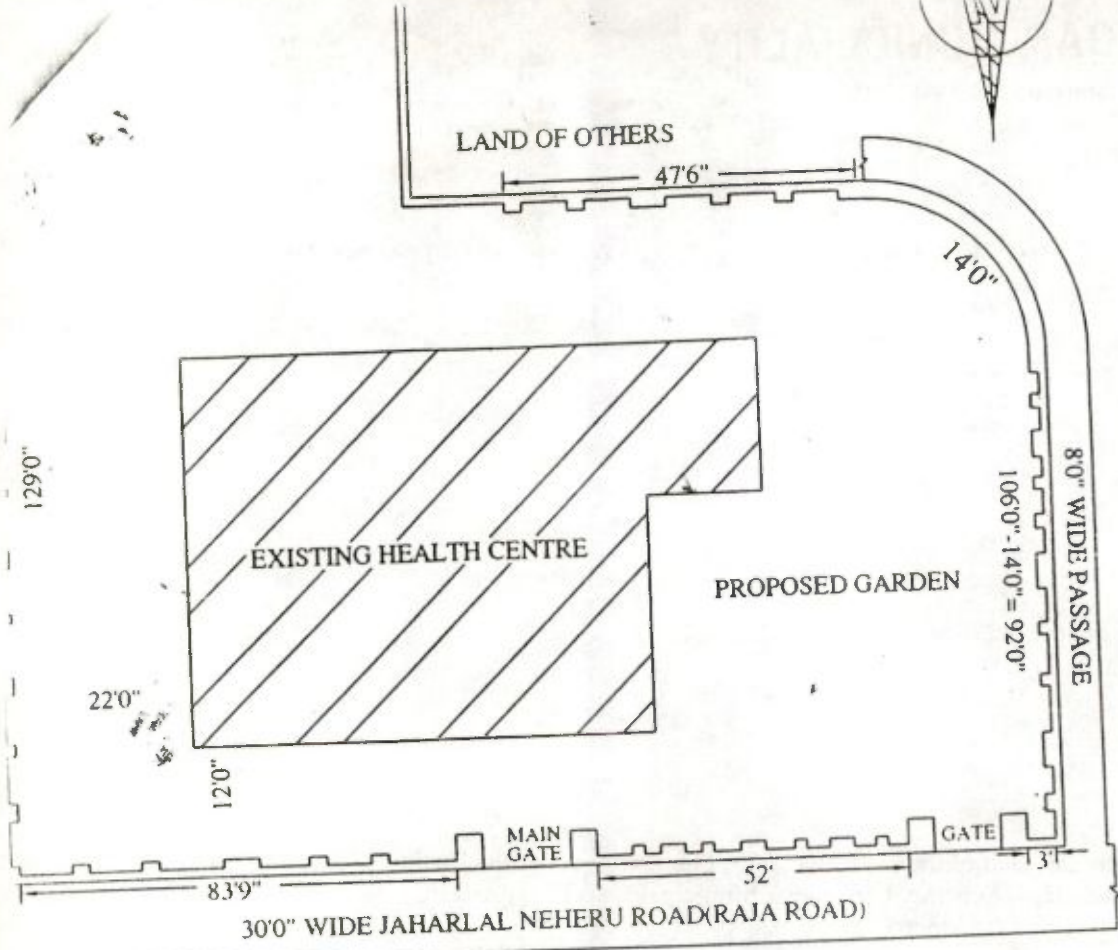
O/c



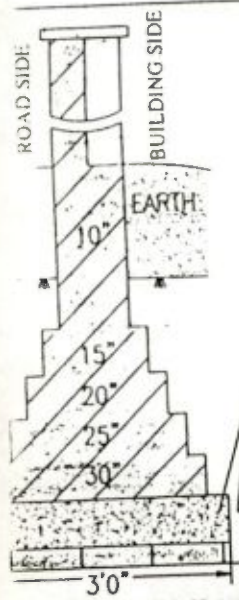
Chairman
Krishnagar Municipality

28/03/07

CA



PLAN



P.C.C with jh.khoo Stone chips
Single B.F.S.

Wag
31/07/06
Chairman
KRISHNAGAR MUNICIPALITY

[Signature]
31/07/06
Work Charged
Suo-Assistant Engineer
Krishnagar Municipality

S OF FOUNDATION

DRAWN BY:-

KRISHNAGAR MUNICIPALITY

Detailed estimate for the construction of brick masonry boundary Wall surrounding Chowdhury para Health Post Centre under D.F.I.D. Assisted H.H.W. Scheme.

Total Length of wall = 476'-3", 10" sq. brick pillar @ 7'-0"
C/C with 0'-5" th. brick-wall.

1. Earthwork in excavation in foundation trenches with depth upto 1.5m.

Wall - $1 \times 476'-3" \times 3'-0" \times 4'-0" = 5733.00 \text{ ft}^3$

Pillar - $4 \times 3'-6" \times 3'-6" \times 4'-0" = 196.00 "$

 $= 5929.00 \text{ ft}^3$

$= 167.89 \text{ m}^3$ @Rs. 2,723=00/ m^3 Rs. 4,572=00

2. Single layer B.F.S. with picked, jama bricks in foundation base.

Wall - $1 \times 476'-3" \times 3'-0" \times - = 1433.25 \text{ ft}^2$

Pillar - $4 \times 3'-6" \times 3'-6" \times - = 49.00 "$

 $= 1482.25 \text{ ft}^2$

$= 137.75 \text{ m}^2$ @Rs. 81=00/ m^2 Rs. 11,158=00

3. Laying & consolidating cement concrete 1:3:6 with graded stone chips.

Wall - $1 \times 476'-3" \times 3'-0" \times 0'-6" = 716.62 \text{ ft}^3$

Pillar - $4 \times 3'-6" \times 3'-6" \times 0'-6" = 24.50 "$

 $= 741.12 \text{ ft}^3$

$= 20.98 \text{ m}^3$ @Rs. 2,467=00/ m^3 Rs. 51,758=00

4. First Class brick wall with cement mortar

For a) $1 \times 476'-3" \times 2'-6" \times 0'-6" = 595.31 \text{ cft.}$

$1 \times 476'-3" \times 2'-1" \times 0'-6" = 495.30 "$

$1 \times 476'-3" \times 1'-8" \times 0'-6" = 397.67 "$

$1 \times 476'-3" \times 1'-3" \times 0'-6" = 446.48 "$

$1 \times 476'-3" \times 0'-10" \times 4'-3" = 1679.97 "$

For b) $4 \times 2'-11" \times 2'-11" \times 0'-6" = 17.05 "$

$4 \times 2'-6" \times 2'-6" \times 0'-6" = 12.50 "$

$4 \times 2'-1" \times 2'-1" \times 0'-9" = 12.98 "$

$4 \times 1'-8" \times 1'-8" \times 2'-0" = 22.04 "$

 $= 3679.30 \text{ cft.}$

$= 104.29 \text{ m}^3$ @Rs. 1542=00/ m^3 Rs. 1,60,885=00

27/07/06

[Signature]
31/07/06

Chairman
KRISHNAGAR MUNICIPALITY

Contd..P/(2)

KRISHNAGAR MUNICIPALITY

: : 2 : :

5. First class brick work with cement mortar 1:4 in G.F. to structure wall.

$$64 \times 10' - 10'' \times 10' - 10'' \times 6' - 0'' = 264.54 \text{ Cft.}$$

$$4 \times 1' - 8'' \times 1' - 8'' \times 9' - 0'' = 100.40 \text{ "}$$

Wall in west turn.

$$1 \times 14' - 0'' \times 10' - 10'' \times 6' - 0'' = 69.72 \text{ "}$$

Carpet at top.

$$1 \times 476' - 3'' \times 10' - 10'' \times 10' - 3'' = 98.82 \text{ "}$$

$$533.48 \text{ Cft.}$$

$$= 15.12 \text{ m}^3$$

$$\text{@Rs. } 1697 = 00 / \text{m}^3$$

Rs. 25,659 = 00

6. 12.5cm. th. brick work with cement mortar 1:4 for wall.

$$1 \times 409' - 2'' \times 6' - 0'' = 2455.02$$

$$= 228.16 \text{ m}^2$$

$$\text{@Rs. } 217 = 00 / \text{m}^2$$

Rs. 49,283 = 00

7. Hire & Labour charges for shuttering of R.C.C. work.

For sides of the beam.

$$2 \times 50' - 0'' \times 1' - 0'' = 100.00 \text{ ft}^2$$

$$= 9.29 \text{ m}^2$$

$$\text{@Rs. } 92 = 00 / \text{m}^2$$

Rs. 858 = 00

8. Reinforcement with Fe415 grade ton bar for R.C.C. work.

0.75% of Vol of Concrete work.

$$2.52 \times 0.75\% \times 8.5 = 1.48 \text{ Qnts.}$$

$$\text{@Rs. } 2193 = 10 / \text{Qnt.}$$

Rs. 3,246 = 00

9. Nominal Mix M15 grade cement concrete 1:2:4 as R.C.C. work.

For the 1 X 50' - 0'' X 10' - 10'' X 1' - 0'' = 41.50 ft³

Over Carpet.

$$1 \times 476' - 3'' \times 10' - 10'' \times 10' - 142'' = 47.43 \text{ "}$$


$$88.93 \text{ ft}^3$$

$$= 2.52 \text{ m}^3$$

$$\text{@Rs. } 2745 = 00 / \text{m}^3$$

Rs. 6,917 = 00

31/07/06
 Mr. Chairman
 Municipalities


 31/07/06
 Chairman
 KRISHNAGAR MUNICIPALITY

Contd.. P/(3)

KRISHNAGAR MUNICIPALITY

11 3 11

10. 15mm. th. plastering with cement mortar 1:6 to walls etc.

Sides - $2 \times 476' - 3'' \times 16' - 0'' = 5715.00 \text{ ft}^2$

Sides of W. Pillars (2x64) $\times 0' - 5'' \times 16' - 0'' = 922.56 \text{ ''}$

$1 \times 476' - 3'' \times 10' - 11'' \times - = 438.15 \text{ ''}$

Pillar (Gate) $4 \times 16' - 3'' \times 19' - 0'' = 225.00 \text{ ''}$

Exist Wall. $2 \times 49' - 0'' \times 5' - 10'' = 571.34 \text{ ''}$

7262.05 ft²
= 674.91 m²

@Rs. 70=00/m²

Rs. 47,294=00

11. 15mm. th. cement plaster (1:4) with neat cement punning to walls etc.

Inside dado - $1 \times 476' - 3'' \times 2' - 3'' = 1071.56 \text{ ft}^2$

Outside. $1 \times 476' - 3'' \times 3' - 3'' = 1547.81 \text{ ''}$

2618.37 ft²
= 243.43 m²

@Rs. 82=00/m²

Rs. 19,961=00

12. Removing of excavated Loose earth from ward site with two head load.

Vol. = $\frac{4}{5}$ th. of Item No. -1
 $= \frac{4}{5} \times 167.89 = 134.31 \text{ m}^3$

@Rs. 20=60/m³

Rs. 2,767=00

13. Supplying, fitting & fixing grill gate.

@ 35 kg. per sq.m.

Gate - 1 - $1 \times 10' - 0'' \times 5' - 9'' (\text{av}) = 57.50 \text{ ft}^2$

$\frac{2}{2} = 1 \times 8' - 0'' \times 5' - 9'' (\text{av}) = 46.00 \text{ ''}$

103.50 ft²

$= 9.62 \text{ m}^2 = 336.70 \text{ kg.} = 3.367 \text{ Quz.}$

@Rs. 3,580=00/Quz.

Rs. 12,054=00

14. Applying cement primer with best quality to walls.

Area same as Item No.-10 = 674.91 m²

@Rs. 1260=00/m²

Rs. 8,504=00

Work charged
31/07/06

[Signature]
31/07/06
Chairman
KRISHNAGAR MUNICIPALITY

Contd..P/(4)

KRISHNAGAR MUNICIPALITY

:: 4 ::

15. Applying two coats of decorative
cement based paint.

Area same as Item No.-14 = 674.91 m^2

@Rs. 19=00/ m^2

Rs. 12,823=00

16. Two coats of painting over a
coat of priming to steel surface.

Area same as Item No.-12 = 9.62 m^2

@Rs. 55=00/ m^2

Rs. 529=00

Add. 5% as Contingency. (+)


Rs. 4,18,145=00

Rs. 20,907=00


Rs. 4,39,052=00

Total Rupees Four Lakh Thirty nine thousand
Fifty two only.

This estimate has been prepared
as per P.W.D. Central Circle Schedule
of rates effective from 2002.


31/07/06

Chairman
KRISHNAGAR MUNICIPALITY


31/07/06
Work-Charged

Suo-Assistant Engineer
Krishnagar Municipality