

৭৯

সুড

SUDA

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

"ইলগাস ভবন", এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
"ILGUS BHAVAN", H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA- 50/2016/554.3

তারিখ 08.05.2019

From : Director,

To : Sri Saikat Dutta
Joint Secretary,
UD&MA Department,
Government of West Bengal

Sub: Action Taken report according to the direction under Section '5' of Environment (Protection) Act. 1986 for implementation of the Solid Waste Management Rules, 2016.

Ref: Your office Memo No. 171(Law)/C-12/NGT/3S-04/2019 dated 02.05.2019

Sir,

In response to your letter on above mentioned subject and reference, please find enclosed the reply for your perusal and necessary action.

Yours faithfully

Encl: As stated above

Sd/- 8/5/19
Director, SUDA



দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408



রাজ্য নগর উন্নয়ন সংস্থা

SUDA

STATE URBAN DEVELOPMENT AGENCY

"ইলগাস ভবন", এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ

"ILGUS BHAVAN", H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA- 50/2016/5563

তারিখ 08.05.2019

From : Director,

To : Sri Saikat Dutta
Joint Secretary,
UD&MA Department,
Government of West Bengal

Sub: Action Taken report according to the direction under Section '5' of Environment (Protection) Act. 1986 for implementation of the Solid Waste Management Rules, 2016.

Ref: Your office Memo No. 171(Law)/C-12/NGT/3S-04/2019 dated 02.05.2019

Sir,

In response to your letter on above mentioned subject and reference, please find enclosed the reply for your perusal and necessary action.

Yours faithfully

Sd/- 08/5/19
Director, SUDA

Encl: As stated above

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

Urban Development & Municipal Affairs Department, Government of West Bengal

Action Taken report according to the direction under Section '5' of Environment (Protection) Act. 1986 for implementation of the Solid Waste Management Rules, 2016.

	Query of Page No.5 of the letter of CPCB vide F. No. B-11011/1/UPC-II/MSW/2018-19/1061 dt. 15.04.2019	Reply	
1	At State level, a technical cell may be set-up to assist Local Bodies to enable them to initiate implementation of SWM Rules, 2016. States may evolve Plans and Policy to provide technical and financial assistance to the Local Bodies.		State Government in State Urban Development Agency (SUDA) of Urban Development & Municipal Affairs Department has constituted a State Level Task Force and state level technical cell to assist Local Bodies to enable them to initiate implementation of SWM Rules, 2016. State Government has formulated a State Level Policy and strategy on Solid Waste and Plastic Waste Management in urban areas of West Bengal. State Government has engaged two Transaction Advisors for Assisting the State Government for Planning of Scientific Solid Waste Management through Cluster Approach and Bid Process Management for selection of Developers & Operators. State Government is also in the process of engaging expert organization for city based planning and providing assistance to the Urban Local Bodies in the State in developing a city-wide concept plan cum action plan (Micro Level Plan) based on interventions and documents of respective departments and review of identification of key challenges, situation analysis and strategic action points for effective disposal of waste and handholding support as well for successful implementation of the plan in field.
2	Segregation of waste at source is to be made mandatory for ensuring safe disposal of MSW. Wet waste should be composted and dry waste should be sent to Material Recovery Facility (MRF) for further segregation & its usage.		This has already been communicated to all the ULBs and the responsibility has been entrusted upon the ULB level Task Force. Already, practice of segregation of waste at source is in place at 276 wards out of 2938 wards. Wet waste processing plant is already in place in 13 ULBs and under construction is in 10 ULBs.
3	For proper implementation of Solid Waste Management Rules, 2016, every State should Finalize and place in public domain its Strategy & time target action plan.		The State Level Policy and strategy on Solid Waste and Plastic Waste Management in urban areas of West Bengal have already been uploaded in the website of UD&MA Department (https://wbdma.gov.in) and the time target action plan has already been submitted before Hon'ble NGT.
4	Every State should follow the criteria for selecting a landfill site and setting-up buffer zone around a landfill and waste processing sites as per the guidelines and provide status of selected landfill sites in the State as per criteria of SWM Rules, 2016.		Being complied.
5	The States/UDs shall ensure safe disposal of legacy Municipal Solid Waste as per Guidelines issued by CPCB.		Being complied.
6	Every State/UT shall constitute State Level Advisory Body (SLAB) and submit the status of compliance by 30th April, 2019		State Level Advisory Body has already been constituted in UD&MA Department, Government of West Bengal as per direction of the Solid Waste Management Rules, 2016. All the 125 ULBs have submitted their Annual Return in Form-IV of Solid Waste Management Rules, 2016 to the West Bengal Pollution Control Board and UD&MA Department within 30th April, 2019.

Government of West Bengal
Urban Development & Municipal Affairs Department
"NAGARAYAN"
DF-8, Sector-I
Salt Lake City, Kolkata 700 064

No.171(Law)/C-12/NGT/3S-04/2019

Dated, Kolkata, the 2nd May, 2019

From : Joint Secretary to the Govt. of W.B.

✓ To : Director, State Urban Development Agency
ILGUS Bhavan, HC Block,,
Sector III, Salt Lake, Kolkata -700 091



URGENT

CMPM
sdg

Sub: Direction under Section '5' of Environment (Protection) Act, 1986 for implementation of the Solid Waste Management Rules, 2016 – reg.

Madam,

With reference to above, I am directed to enclose herewith a copy of communication of Chairman, CPCB regarding implementation of the Solid Waste Management Rules, 2016 and to request you to submit an action taken report by 06.05.2019 positively.

Encl. As stated

Yours faithfully,


Joint Secretary to the Government of West Bengal

20-30/04/19

UD/00/2019/04795
Pr. Secy/UDMA
29/04/2019.



केन्द्रीय प्रदूषण नियंत्रण बोर्ड
CENTRAL POLLUTION CONTROL BOARD
पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय भारत सरकार
MINISTRY OF ENVIRONMENT, FOREST & CLIMATE CHANGE GOVT. OF INDIA

F. No. B-11011/1/UPC-II/MSW/2018-19/1061

Date: 15-04-2019

To,
The Principal Secretary,
Department of Municipal Affairs (DMA),
Nagarayan, Sector-I, Block-DF Nagar,
Kolkata-700064-8 Bidhan

Sub: Direction under Section '5' of Environment (Protection) Act, 1986 for implementation of the Solid Waste Management Rules, 2016-reg.


1. **WHEREAS**, as per rule 16 (a) of the SWM Rules, 2016, the State Pollution Control Board or Pollution Control Committee shall enforce these rules in their State through local bodies in their respective jurisdiction and review implementation of these rules at least twice a year in close coordination with concerned Directorate of Municipal Administration or Secretary-in-charge of State Urban Development Department;
 2. **WHEREAS**, as per rule 16 (b) of the SWM Rules, 2016, the State Pollution Control Board or Pollution Control Committee shall monitor environmental standards and adherence to conditions as specified under the Schedule I and Schedule II for waste processing and disposal sites;
 3. **WHEREAS**, it has been reported that there are several complaints/ litigations with regard to non- implementation of Solid Waste Management Rules,2016;
 4. **WHEREAS**, as per the rule 24 (1), 15 (za) & (zb), 24 (2) & 24 (3) of the Solid Waste Management Rules,2016, following actions shall be complied:
 - The operator of facility shall submit the annual report to the local body in Form-III on or before the **30th day** of April every year.
 - The local authorities and Panchayats shall;
 - Prepare and submit annual report in **Form-IV** on or before the **30th April** of the succeeding year to the Commissioner or Director, Municipal Administration or designated Officer;
- The annual report shall be sent to the Secretary-in-Charge of the State Urban Development Department or village panchayat or rural

JS (SD) JS (MA)
Recd 30/04/19
H.A. MA

26/11/2019
Dl. open file and put up
30/04/19

Sr. 40 (UDMA)
29/4/19

development department and to the respective State Pollution Control Board or Pollution Control Committee by the **31st May** of every year;

5. **WHEREAS**, as per the rule 24 (1), 15 (za) & (zb), 24 (2) & 24 (3) of the Solid Waste Management rules ,2016 each State Pollution Control Board or Pollution Control Committee as the case may be, shall prepare and submit the consolidated annual report to the Central Pollution Control Board and Ministry of Urban Development on the implementation of these rules and action taken against non-complying local body by the **31st day of July** of each year in **Form-V**;
6. **WHEREAS**, more than 02 years have been passed from the notification of Solid Waste Management Rules, 2016 and majority of Municipal Authorities have failed to comply with provisions of the Rules;
7. **WHEREAS**, most of MSW dumpsites have been exhausted in a city/town, however, dumping of mixed MSW is continued;
8. **WHEREAS**, Hon'ble National Green Tribunal upon hearing all the States/UTs passed order dated **20.8.2018** & **31.08.2018** in the matter of OA No.606/2018, in which it has been observed that the SWM Rules, 2016 have been notified on 8th April, 2016, but implementation of the Rules remains a challenge;
9. **WHEREAS**, as per Rule 24(4) of the SWM Rules, 2016, CPCB prepared and submitted annual report on implementation of these Rules to MoEF & CC wherein serious deficiencies have been found in compliance of provisions of Solid Waste Management Rules, 2016;
10. **WHEREAS**, Hon'ble NGT in its order dated 31.08.2018 in the matter of OA No.606/2018 observed that the States and Union Territories are nowhere near compliance of the Rules, 2016 inspite of the directions issued by this Tribunal. Even action plans have yet not been prepared in all the States more than two years after the Rules, 2016 have been in operation and inspite of binding directions in the Judgment of this Tribunal vide order dated 22.12.2016 in case no OA 199/2014 in the matter of Almitra H. Patel Vs. Union of India; 

- 11. WHEREAS**, the Rule 23 (1) of the Solid Waste Management Rules, 2016 specify the duty of Every Department in-charge of local bodies of the concerned State Government or Union Territory administration to constitute a State Level Advisory Body (SLAB) within **six months** from the date of notification of these rules;
- 12. WHEREAS**, out of 35 states/UTs, only 30 States have submitted the status regarding the constitution of State Level Advisory Body (SLAB);
- 13. WHEREAS**, the Rule 23 (2&3) of the Solid Waste Management Rules, 2016, the State Level Advisory Body (SLAB) shall meet at least once in **every six months** to review the matters related to implementation of these rules, state policy and strategy on solid waste management and give advice to state government for taking measures that are necessary for expeditious and appropriate implementation of these rules. Whereas, the copies of the review report shall be forwarded to the State Pollution control Board or Pollution Control Committee for necessary action;
- 14. WHEREAS**, the Hon'ble National Green Tribunal in the matter of Almitra H. Patel & Ors Vs. Union of India & Ors (199/2014) in the final judgment dated **2nd January, 2017** issued order at S. No. 28 that "Every Advisory Committee in the State shall also act as a "Monitoring Committee" for proper implementation of these directions and the Rules, 2016;
- 15. WHEREAS**, Central Pollution Control Board issued directions on dated 11th September, 2017 under Section 5 of Environment (Protection) Act, 1986 for implementation of Rule 23-Constitution of State Level Advisory Body within **six months** from the notification of Solid Waste Management Rules, 2016 to all the Secretary-In-charge, Urban Development Department of all States/UTs.
- 16. WHEREAS**, the Annual Report submitted by State Pollution Control Board in the year 2017-2018 has not been submitted by all the SPCBs/PCCs on implementation of Solid Waste Management Rules, 2016. The last date for submission of Annual report was **31.07.2018**. Out of **35** States/UTs, only **16** SPCBs/PCCs have submitted Annual Report (AR) till 15.10.2018. (Last Date ~~31.07.2018~~)

31.07.2018).The following are the observations on the Annual Report submitted by these states.


- Most of the ARs submitted by SPCBs/PCCs have not provided any data related to monitoring of the ground water around the landfill site or processing site.
- Most of the ARs submitted by SPCBs/PCCs have not provided any data/information on the ambient air quality.
- Majority of the States have not initiated segregation at the source.
- Most of the States have not provided proper information on waste collection, processing and disposal facilities.
- Most of the States have not provided information about action plan prepared and submitted by the ULBs.
- Waste processing and disposal facilities in majority of States are not in working condition.
- State Policy and Strategy for implementation of the Solid Waste Management Rules, 2016, have not been formed by majority of States/UTs.
- Lack of coordination between Urban Development Departments (UDDs), Urban Local Bodies (ULBs) & State Pollution Control Boards/Pollution Control committees (SPCBs/PCCs) and other concerned Agencies, who are involved in implementation of SWM Rules, 2016.
- Most of the dumpsites are unscientific and operating without complying SWM, Rules, 2016. However, as per SWM Rules, 2016 Landfill site should preferably be used only for depositing inert waste and rejects.
- Mixed MSW is dumped on dumpsites causing environmental & health hazard and often lead to open-fires.

17. NOW THEREFORE, in view of the above observations on implementation of the provisions of the rules under Solid Waste Management Rules,2016 and in exercise of powers vested to the Chairman, Central Pollution Control Board under Section 5, Environment (Protection) Act, 1986 to Chairman, SPCBs/PCCs & Secretary, UDDs are hereby directed as under.


For SPCBs/PCCs:

1. SPCBs/PCCs shall submit complete Annual Report in the prescribed format on implementation of SWM Rules, 2016 i.e., before **31st July** each year.
2. SPCBs/PCCS shall make provision for online uploading of Annual Reports by SPCBs/PCCs on individual websites.
3. Interaction between SPCB/PCCs & State UDDs Departments shall be strengthened for proper implementation of Solid Waste Management Rules, 2016.
4. SPCBs/PCCs shall follow up with the municipalities and suggest setting up of waste processing/disposal facilities either by the municipality or by engaging private entrepreneurs and provide present status in the State.

For Urban Development Department (UDD):

1. At State level, a technical cell may be set-up to assist Local Bodies to enable them to initiate implementation of SWM Rules, 2016. States may evolve Plans and Policy to provide technical and financial assistance to the Local Bodies.
2. Segregation of waste at source is to be made mandatory for ensuring safe disposal of MSW. Wet waste should be composted and dry waste should be sent to Material Recovery Facility (MRF) for further segregation & its usage.
3. For proper implementation of Solid Waste Management Rules, 2016, every State should finalize and place in public domain its Strategy & time target action plan.
4. Every State should follow the criteria for selecting a landfill site and setting-up buffer zone around a landfill and waste processing sites as per the guidelines and provide status of selected landfill sites in the State as per criteria of SWM Rules, 2016.
5. The States/UDDs shall ensure safe disposal of legacy Municipal Solid Waste as per Guidelines issued by CPCB.
6. Every State/UT shall constitute State Level Advisory Body (SLAB) and submit the status of compliance by **30th April, 2019.** 


SPCBs/PCCs & UDDs are hereby directed to acknowledge the receipt of these directions immediately and submit action taken report for compliance of the above directions to CPCB by **25.04.2019** failing which necessary action shall be initiated in accordance with law.



(S.P. Singh Parihar)
Chairman

Copy to:

1. **Joint Secretary**
CP Division,
Ministry of Environment, Forest and Climate Change
Indira Paryavaran Bhawan, JorbhagRoad,
New Delhi -110003
2. **Joint Secretary, Mission Director,**
Ministry of Housing and Urban Affairs
Nirman Bhawan, 'C' wing, Room no. 307 'C'
New Delhi-110001
3. **Divisional Head ,IT Division , CPCB**



(A. Sudhakar)

Member Secretary



ক্রমিক নং SUDA-50/2016/1983

তারিখ 25.02.2019

To:

1. The Chief Executive Officer, KMDA
2. The Secretary, MED

Sub: Submission of Action Taken Report and Action Plan on Solid Waste Management and STP


Sir,

You are aware that Hon'ble National Green Tribunal has directed the Chief Secretary to Government of West Bengal to appear before the Hon'ble NGT on 13.02.2019 alongwith the action taken reports and action plan on Solid Waste Management and STP of 125 ULBs of West Bengal.

In this connection, I am directed to prepare a consolidated book on the Action Taken Report and Action Plan.

I am further directed to request you kindly to send the action taken .report and action plan on SWN and STP of the ULBs under your jurisdiction to the email ID : sbm.wbsuda@gmail.com in soft form within 28th February 2019, so that we can prepare a consolidated report and action plan of 125 ULBs and submit the same to the Chief Secretary by 5th February 2019.

Yours faithfully

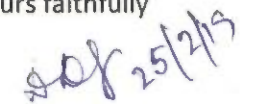

(Director)

Copy forwarded to:

1. PS to the Hon'ble MIC, UD & MA Department, GoWB
2. Sr PA to the Principal Secretary, UD & MA Department, GoWB

(Director)

সুডা

SUDA

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA-50/2016/1983

তারিখ 25.02.19

To:

1. The Chief Executive Officer, KMDA
2. The Secretary, MED

Sub: Submission of Action Taken Report and Action Plan on Solid Waste Management and STP

Sir,

You are aware that Hon'ble National Green Tribunal has directed the Chief Secretary to Government of West Bengal to appear before the Hon'ble NGT on 13.02.2019 alongwith the action taken reports and action plan on Solid Waste Management and STP of 125 ULBs of West Bengal.

In this connection, I am directed to prepare a consolidated book on the Action Taken Report and Action Plan.

I am further directed to request you kindly to send the action taken .report and action plan on SWN and STP of the ULBs under your jurisdiction to the email ID : sbm.wbsuda@gmail.com in soft form within 28th February 2019, so that we can prepare a consolidated report and action plan of 125 ULBs and submit the same to the Chief Secretary by 5th February 2019.

Yours faithfully

sd/

(Director)

25.02.2019

SUDA-50/2016/1983/1(2)

Copy forwarded to:

1. PS to the Hon'ble MIC, UD & MA Department, GoWB
2. Sr PA to the Principal Secretary, UD & MA Department, GoWB

sd/ 25/2/19
(Director)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

সুডা

o/c

SUDA

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA-50/2016/1983

তারিখ 25.02.2019

To:

1. The Chief Executive Officer, KMDA
2. The Secretary, MED

Sub: Submission of Action Taken Report and Action Plan on Solid Waste Management and STP

Sir,

You are aware that Hon'ble National Green Tribunal has directed the Chief Secretary to Government of West Bengal to appear before the Hon'ble NGT on 13.02.2019 alongwith the action taken reports and action plan on Solid Waste Management and STP of 125 ULBs of West Bengal.

In this connection, I am directed to prepare a consolidated book on the Action Taken Report and Action Plan.

I am further directed to request you kindly to send the action taken .report and action plan on SWN and STP of the ULBs under your jurisdiction to the email ID : sbm.wbsuda@gmail.com in soft form within 28th February 2019, so that we can prepare a consolidated report and action plan of 125 ULBs and submit the same to the Chief Secretary by 5th February 2019.

Yours faithfully




(Director)

Dt 25.02.2019

SUDA-50/2016/1983 /1 (2)

Copy forwarded to:

1. PS to the Hon'ble MIC, UD & MA Department, GoWB
2. Sr PA to the Principal Secretary, UD & MA Department, GoWB



(Director)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408



PMB
[Signature]
27/7/17

Project Director, CMU <kuspcmu@gmail.com>

Please ignore the earlier order no. 701/MA dt. 25.07.2017 on "Departmental Tender / Technical Committee"

1 message

Joint Secretary MA & UD Department <jsudmadeptt@gmail.com>

Wed, Jul 26, 2017 at 11:43 AM

To: "Director, SUDA" <wbsudadir@gmail.com>, ce_medte <ce_medte@yahoo.com>, kuspcmu@gmail.com, AMRUT westbengal <amrut.wb@gmail.com>

Sir,

Order No. 701/MA/C-10/3C-1/2017 dtd. 25.07.2017 on the above subject in enclosed for your perusal.

Your sincerely,

Joint Secretary
Urban Development & Municipal Affairs Department

 **Revised-701.pdf**
1092K

**Government of West Bengal
Department of Urban Development & Municipal Affairs
(Municipal Affairs Branch)
Poura Prashasan Bhawan
DD-1, Sector-I,
Salt Lake, Kolkata-700 064**

No. 701/MA/C-10/3C-1/2017

Dated, Kolkata, the 25th day of July, 2017

ORDER

The undersigned is directed to state that the Technical Committee of State Urban Development Agency (SUDA) will take care of all State Plan Schemes / Buildings etc. in addition to the programmes under NULM, NUHM, Abattoir etc., beyond Rs. 4 crore, and will act as Departmental Tender Committee / Technical Committee in terms of the Finance (Audit) Department Memo. No. 925-F(Y) dated 14.02.2017.

The undersigned, in continuation of Notification No. 641-MA/C-10/3S-24/2015 dated 11.09.2015 and other Orders / Notifications issued time to time in this regard, is also directed to state that the State Level Technical Committee (SLTC) of 'Atal Mission for Rejuvenation & Urban Transformation (AMRUT)', will take care of all Water Supply, Sewerage, Sanitation / Solid Waste Management, Storm Water Drainage & Parks etc. under Centrally Sponsored Schemes / State Schemes beyond Rs. 4 crore, and will act as Departmental Tender Committee / Technical Committee in terms of the Finance (Audit) Department Memo. No. 925-F(Y) dated 14.02.2017.

The undersigned is further directed to state that State Level Appraisal Committee (SLAC) for Housing Projects / 'Housing For All (HFA)' / 'Integrated Housing & Slum Development Programme (IHSDP)' / 'Banglar Bari' etc. will, as per Guidelines, act as Departmental Tender Committee / Technical Committee in terms of the Finance (Audit) Department Memo. No. 925-F(Y) dated 14.02.2017.

Sd/-
**Joint Secretary
to the Government of West Bengal**


Contd.....P/2

No. 701(25)/MA/C-10/3C-1/2017

Dated, Kolkata, the 25th day of July, 2017

Copy forwarded for information and necessary action to :-

1. Principal Secretary, Finance Department, Government of West Bengal.
2. Additional Chief Secretary / Principal Secretary, Land & Land Reforms Department, Government of West Bengal.
3. Additional Chief Secretary / Principal Secretary, Transport Department, Government of West Bengal.
4. Principal Secretary, Planning Department, Government of West Bengal.
5. Chief Executive Officer, Kolkata Metropolitan Development Authority.
6. Director, SUDA & State Mission Director, PMAY (HFA).
7. Secretary, Municipal Engineering Directorate & Engineering Advisor, AMRUT.
8. Joint Secretary, Urban Development & Municipal Affairs Department (Municipal Affairs Branch), Government of West Bengal.
9. State Mission Director, AMRUT, West Bengal.
10. Director of Local Bodies, West Bengal.
11. Engineer-in-Chief, Public Health Engineering Department.
12. Chief Engineer, Municipal Engineering Directorate.
13. Financial Advisor, Urban Development & Municipal Affairs Department.
14. Finance Department (Group 'N' / 'R'), Government of West Bengal.
15. Director General (Water Supply), Kolkata Metropolitan Development Authority.
16. Director General (Water Supply), Kolkata Municipal Corporation.
17. Project Director, Change Management Unit.
18. Additional Director, Institute of Local Government & Urban Studies.
19. Additional Director & Financial Advisor, SUDA.
20. Technical Advisor, AMRUT.
21. Technical Advisor, SUDA.
22. Technology Upgradation Officer, SUDA.
23. P.S. to MIC, Urban Development & Municipal Affairs Department, Government of West Bengal.


Joint Secretary
to the Government of West Bengal



Government of West Bengal
Department of Urban Development & Municipal Affairs
Nagarayan, DF-8, Sector- I,
Salt Lake City, Kolkata – 700 064



No. 932/MAC-10/1G-1/2015 Pt.

Dated, Kolkata, the 25th day of July, 2018

From : Special Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

B. N. K. 654
CM/PM H
31/7/18

Sub: Administrative Approval for Implementation of Solid Waste Management Project

Sir,

With reference to above, I am directed to inform you that Administrative approval for the 13 (thirteen) schemes as stated in Annexure – I is hereby accorded to take necessary steps for Implementation of Solid Waste Management Project in different ULBs; subject to:

- i) Strict observance of all relevant Financial Rules & Regulations of the State Government issued time to time including e-tendering;
- ii) Timely completion of work to avoid escalation of cost;
- iii) Non-deviation of allotted fund from approved scheme; and
- iv) Submission of Utilization Certificate of the fund allotted within 6 (six) months from the date of drawal of the same & Physical Progress Report of the scheme.

Necessary fund will be released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/procurement from Competent Authority.

This letter is issued with the approval of Finance Department vide U.O. No.0656 dated 23.07.2018.

Encl. As stated

Yours faithfully,

[Signature]
Special Secretary to the Government of West Bengal

ANNEXURE -I

Enclosure of No.932 /MA/C-10/1G-1/2015 Pt.

Dated, Kolkata, the 25th day of July, 2018

Sl. No.	Name of ULB	Project Cost (Rs. in Lakh)	GOI Share (Rs. In lakh)	State Share (Rs. In lakh)	ULB share (Rs. in lakh)	Executing Agency
1.	Durgapur MC	6431.00	2251.00	3858.00	321.00	M.E.Dte
2.	Bankura	1649.00	577.00	990.00	82.00	M.E.Dte
3.	Purulia	1460.00	511.00	876.00	73.00	M.E.Dte
4.	Coochbehar	935.00	327.00	561.00	47.00	M.E.Dte
5.	Burdwan	3817.00	1336.00	2290.00	191.00	M.E.Dte
6.	Arambag	934.00	327.00	561.00	47.00	M.E.Dte
7.	Raghunathpur	562.00	197.00	337.00	28.00	M.E.Dte
8.	Kharagpur	3407.00	1193.00	2044.00	170.00	M.E.Dte
9.	Panihati	4522.00	1583.00	2713.00	226.00	KMDA
10.	Kanchrapara	2703.00	946.00	1622.00	135.00	KMDA
11.	Baruipur	1265.00	442.00	760.00	63.00	KMDA
12.	Garulia	1049.00	367.00	630.00	52.00	KMDA
13.	Asansol MC (Ph-II)	2912.00	1019.00	1602.00	291.00	M.E.Dte
	Total	31646.00	11076.00	18844.00	1726.00	

Special Secretary



Government of West Bengal
Department of Urban Development & Municipal Affairs
Nagarayan, DF-8, Sector- I,
Salt Lake City, Kolkata – 700 064



No. 933/MA/C-10/1G-1/2015 Pt.

Dated, Kolkata, the 25th day of July, 2018

From : Special Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

B.N. KAG
C.M.P.M. M
31/7/18

Sub: Administrative Approval for Procurement of SWM Vehicles & Equipment

Sir,

With reference to above, I am directed to inform you that Administrative approval for procurement of SWM Vehicles & Equipment for 97 ULBs at an estimated cost of Rs.32249.00 lakh (GOI Share VGF 35%) is hereby accorded to take necessary steps; subject to:

- i) Strict observance of all relevant Financial Rules & Regulations of the State Government issued time to time including e-tendering;
- ii) Timely completion of work to avoid escalation of cost;
- iii) Non-deviation of allotted fund from approved scheme; and
- iv) Submission of Utilization Certificate of the fund allotted within 6 (six) months from the date of drawal of the same & Physical Progress Report of the scheme.

Necessary fund will be released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/procurement from competent authority.

This letter is issued with the approval of Finance Department vide U.O. No. 0656 dated 23.07.2018

Yours faithfully,

[Handwritten Signature]
25/7/18

Special Secretary to the Government of West Bengal

Government of West Bengal
Department of Urban Development & Municipal Affairs
"NAGARAYAN" DF-8, Sector-I,
Salt Lake City, Kolkata-700 064.

No. 484(14)-U D/O/M/Estt./E-04/2018

Dated: 16th February, 2018.

From: The Special Secretary to the
Government of West Bengal.

To : 1) The Commissioner,

_____ Municipal Corporation

2) The Chairman,

_____ Municipality.

Sub : Solid Waste Disposal in Government run Homes.


Sir,

With reference to the above mentioned subject matter, I am directed to request you for disposal of Solid Waste at regular intervals from the Government run Homes registered under Juvenile Justice (care and protection) Act, 2015 located at your areas. A list of such Homes with address is attached herewith for your perusal.

It has been reported by the Child Development Department and Women Development & Social Welfare Department that solid Waste Disposal is not done at regular intervals resulting in unhygienic condition within the Home as also in the vicinity, which is not desirable at all.

I am, therefore, directed to let you know for taking immediate necessary steps for removal of Solid Waste at regular intervals from these sites with report of compliance at once.

Yours faithfully,



Special Secretary to the
Government of West Bengal.

No. 484(14)/1-U D/O/M/Estt./E-04/2018

Dated: 16th February, 2018.

Copy forwarded for information and taking necessary action to :

1. The Director, SUDA,
2. The District Magistrate



Special Secretary to the
Government of West Bengal.

No. 484(14)/2-U D/O/M/Estt./E-04/2018

Dated: 16th February, 2018.

Copy forwarded for information to :

- 1) The Secretary, Child Development Department and Women Development & Social Welfare Department..
- 2) The Sr. P.A. to Secretary, UD & MA Department.


Special Secretary to the
Government of West Bengal.



Government of West Bengal
Department of Urban Development and Municipal Affairs
(Municipal Affairs Branch)
'Nagarayan', 6th floor,
DF - 8, Sector - I, Salt Lake, Kolkata - 700 064.



NOTIFICATION

No. 03(Law)/C-12/Misc-38/2016, dated Kolkata, the 11th day of January, 2018 – In terms of provisions of clause (a) of sub-rule 1 of rule 11 of Solid Waste Management Rules, 2015 issued by the Ministry of Environment, Forest and Climate Change, Government of India vide notification No. S.O. 1357(E), dated the 8th April, 2016 and published in the Gazette of India on the 8th April, 2016, the State Policy and Strategy on Solid Waste Management for Urban Areas of West Bengal containing roles and responsibilities of stakeholders is hereby adopted.

All stakeholders should ensure strict enforcement and implementation of the Policies as stated in the State Policy and Strategy on Solid Waste Management.

By order of the Governor,

Sd /- S. Das

Jt. Secy. to the Govt. of West Bengal.

No. 03/1(140) (Law)/MA/O/C-4/2M-1/2017

Dated Kolkata, the 11th day of January, 2018

Copy forwarded for information to the :-

- (1) Chairman/ Chairperson _____ Municipality.
- (2) Addl. Chief Secretary, Panchayat & Rural Development Department, Government of West Bengal.
- (3) Principal Secretary, Health & Family Welfare Department, Government of West Bengal.
- (4) Principal Secretary, Environment Department, Government of West Bengal.
- (5) Municipal Commissioner, Kolkata Municipal Corporation.
- ✓(6) Director, State Urban Development Agency.
- (7) Chief Engineer, Municipal Engineering Directorate.
- (8) Addl. Mission Director, Mission Nirmal Bangla.
- (9) Commissioner, Howrah Municipal Corporation.
- (10) Commissioner, _____ Municipal Corporation.
- (11) P.S. to Minister-in-Charge, Department of Urban Development and Municipal Affairs.
- (12) Senior Law Officer, Department of Urban Development and Municipal Affairs.
- (13) Sr. P. A. to the Secretary, Department of Urban Development and Municipal Affairs.

S. Das
Joint Secretary

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector-I,
Salt Lake City, Kolkata - 700 064

PMB
16/8/17

No.766/MA/P/C-10/3S-40/2017 (Pt. I)

Dated, Kolkata, the 9th day of August, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106



AND (SRM)
11/8/17

Sub: Administrative Approval for change in purchase of equipment for cleanliness drive by Dum Dum Municipality

Sir,

With reference to above, I am directed to inform you that this Department has no objection for purchase of the following equipments instead of 1.8 Cu.M Hooper Tipper (quantity - 10):

Sl. No	Item	Quantity	Estimated Cost (Rs.)
1.	10 Cubic Mtr. Dumper of BS-IV Model	1	2750000
2.	Battery Operated Hydraulic Dumper	12	25200000
3.	Tri-cycle van(Galv. Sheet Body-conventional Type)	12	228000
Total			5498000

Necessary fund will be released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/ procurement from concerned ULBs.

This letter is issued with the approval of appropriate authority of this Department

Yours faithfully,


Joint secretary to the Government of West Bengal

OFFICE OF THE COUNCILLORS DUM DUM MUNICIPALITY

44, Dr. Sailen Das Sarani, Kolkata - 700028

Memo No.: 930/DM/GRS/13

Date: 24-11-12

From :
Sri Harendra Singh
Chairman
Dum Dum Municipality

To
The Director
State Urban Development Agency
H-C Block, Sector - III,
Bidhannagar, Kolkata - 700106



Handwritten signature and initials: PMG, S, slp/01

Sub: Request for placement of fund in respect of Administrative Approval for cleanliness drive to 4 ULBs adjacent to Airport.

Ref: Joint Secretary, UD & MA's No. 766/MA/P/C-10/3S-40/2017(Pt.-I), Dated - 09.08.2017.

Sir,

With reference to aforesaid Administrative Approval this is to inform you that we have issued supply order for procurement of the following items :-

Sl. No.	Item	Qty.	Basic Price	Taxes	Total	Remarks
1.	10 Cubic Mtr. Dumper of BS-IV Model	1	19,28,125/-	5,39,875/-	24,68,000/-	Rate is finalized through inviting e-tender notice
2.	Battery Operated Hydraulic Dumper	12	23,41,786/-	3,19,334/-	26,61,120/-	Rate is finalized through inviting e-tender notice
3.	Tri-Cycle Van (Galv. Sheet Body-Conventional Type)	12	2,01,600/-	24,192/-	2,25,792/-	Rate is finalized through inviting tender notice
Total Rs.					53,54,912/-	

The photo copy of e-tender notice and notice inviting tender as the case may be and photo copy of supply orders in respect of both the items are enclosed for favour of your kind information and necessary action.

In view of above you are requested to place a fund of Rs. 53,54,912/- (Rupees Fifty Three Lakhs Fifty Four Thousand Nine Hundred Twelve) only for procurement of those items.

Thanking you.

Encl.: As stated



Yours faithfully

Handwritten signature of Chairman

Chairman
Dum Dum Municipality

Dum Dum Municipality
44, Dr. S...

Memo No.:

Copy forwarded for information to :

- The Joint Secretary, UD & MA Department, Poura Prashasan Bhavan, Dum Dum Municipality, Salt Lake City, Kol - 64.

Dated :

Chairman
Dum Dum Municipality

Handwritten initials: SBM

OFFICE OF THE MUNICIPAL COUNCILLORS OF DUM DUM
44, Dr. Sainen Das Sarani, Kolkata - 700028

No.: 931/00M/GEN/17

Date: 24-11-17

From : Chairman
Dum Dum Municipality

To : M/s Abhiyan Dealcomm Pvt Ltd
Sukhsagar Housing Society
2/5A, Sarat Bose Road
Block E-2 2nd Floor
Kolkata 700020

Sub: Supply Order for "Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per our Tender Specifications"

Tender Notice No: 659/DDM/GEN/17 Dtd: 8.9.2017

[Supply Order Value: 24,68,000/-]

Sir,

I am hereby pleased to accept your tender for the above work at the above mentioned being the lowest/negotiated rate. You are, therefore, requested to supply the above positively within 15 days from the date of receipt of this Work Order. You are also instructed to execute an agreement on a stamp paper (valued at Rs.10.00) within 7 (seven) days from the date of receipt of this work order.

Failure to comply with the above requirements will tantamount to cancellation of this work order.

Thanking you,

Yours faithfully,



Chairman

Dum Dum Municipality

Dum Dum Municipality

44, Dr. Sainen Das Sarani

Dum Dum, Kolkata-700028

Date:



Chairman

Dum Dum Municipality

Chairman

Dum Dum Municipality

44, Dr. Sainen Das Sarani


Dum Dum, Kolkata-700028



No: 931(1)/00M/GEN/17

Copy Forwarded for information:-

1. The Finance Officer, Dum Dum Municipality
2. The Accountant, Dum Dum Municipality



AOC Summary

Date : 27-Nov-2017 12:18 PM

Print

Organisation Chain	MUNICIPAL AFFAIRS DEPARTMENT URBAN LOCAL BODIES DUM DUM
Tender ID	:2017_MAD_128155_1
Tender Ref No	:659/DDM/GEN/17
Tender Title	Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications.
Cover System	: 2

Contract Date	:27-Nov-2017
Contract Value	:INR 2468000.00
Work Completion Period (in days)	:30
AOC document	:AOCtipper.pdf (299.00 KB)
AOC Description	:

Awarded Bids List

S.No	Bid Number	Bidder Name	Awarded Currency	Awarded Value
1	730782	ABHIYAN DEALCOMM PVT LTD	INR	2468000.00

Congratulations! You have been awarded the contract for this tender.

Tender Inviting Authority



**West Bengal
Tenders**

eProcurement System of Government of West Bengal

Finance Bid Evaluation Summary

Date : 24-Nov-2017 05:08 PM

Print

Organisation Chain :	MUNICIPAL AFFAIRS DEPARTMENT URBAN LOCAL BODIES DUM DUM
Tender ID :	2017_MAD_128155_1
Tender Ref No :	659/DDM/GEN/17
Tender Title :	Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications.
Cover System :	2

Committee Chairperson/Co-ordinator Type :	Internal
Committee Chairperson/Co-ordinator Name :	Chairman
Committee Members :	
Summary Details :	finsummary_224660.pdf (489.43 KB)
Summary uploaded on :	24-Nov-2017 05:08 PM

No. of Bids : **3**

Bid List

S.No	Bid Number	Bidder Name	Opened By	Submitted Date	Quoted Amount in ₹	Rank	Status	Reason
1	697156	FUTURE AUTOMOBILE AGENCY PVT. LTD	Kashi Nath Roy Choudhury	21-Sep-2017 09:11 PM	27,30,549.00	L3	Accepted	Third Lowest
2	701204	LEXUS MOTORS LTD	Kashi Nath Roy Choudhury	10-Oct-2017 01:21 AM	24,89,797.00	L2	Accepted	Second Lowest
3	730782	ABHIYAN DEALCOMM PVT LTD	Kashi Nath Roy Choudhury	06-Nov-2017 07:45 PM	24,68,000.00	L1	Accepted	Lowest

Tender Inviting Authority



Print

Organisation Chain :	MUNICIPAL AFFAIRS DEPARTMENT URBAN LOCAL BODIES DUM DUM
Tender ID :	2017_MAD_128155_1
Tender Ref No :	659/DDM/GEN/17
Tender Title :	Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications.
Packet Name :	Finance

Decrypted Bid Openers List

S.No	Name	Decrypted Date
1	SUBARNA KUMAR DUTTA	23-Nov-2017 04:11 PM
2	Kashi Nath Roy Choudhury	23-Nov-2017 04:10 PM

Bid List

S.No	Bid No	Bidder	Opened By	Opened Date	Status
1	697156	FUTURE AUTOMOBILE AGENCY PVT. LTD	Kashi Nath Roy Choudhury	24-Nov-2017 04:59 PM	Admitted
2	701204	LEXUS MOTORS LTD	Kashi Nath Roy Choudhury	24-Nov-2017 04:59 PM	Admitted
3	730782	ABHIYAN DEALCOMM PVT LTD	Kashi Nath Roy Choudhury	24-Nov-2017 04:59 PM	Admitted

Bid Opening Summary

Bid Opener	Type	Summary	Updated On
Kashi Nath Roy Choudhury	Finance	Financial Bid Opening Summary	24-Nov-2017 05:04 PM

BOQ Summary Details
Tender Title: 659/DDM/GEN/17
Tender Id: 2017_MAD_128155_1

Sheet Name	Sl.No	Bidder Name	Amount	Bid Rank
B0Q1	1	ABHIYAN DEALCOMM PVT LTD	2466000	L1
	2	LEXUS MOTORS LTD	2489797	L2
	3	FUTURE AUTOMOBILE AGENCY PVT. LTD	2730549	L3


Chairman
Dum Dum Municipality

eProcurement System of Government of West Bengal
 Tender Title: 659/DD/M/GEN/17
 Tender Id: 2017_MAD_128155_1

Tender Inviting Authority: Executive Officer, Dum Dum Municipality

Name of Work: Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications.

Contract No:

SI.No	Description of Work /Item(s)	No. of Qty	Units	Estimated Rate	SCHEDULE OF WORK / ITEM(S)					
					FUTURE AUTOMOBILE AGENCY PVT. LTD		LEXUS MOTORS LTD		ABHIYAN DEALCOMM PVT LTD	
					Rate	Amount	Rate	Amount	Rate	Amount
1.0	Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications.	1	Nos	0.00	2730549	2730549	2489797	2489797	2468000	2468000

L1 Amount	L1 Vendor
24,68,000	ABHIYAN DEALCOMM PVT LTD

Total in Figures

2730549


2489797

2468000

Lowest Amount Quoted BY: ABHIYAN DEALCOMM PVT LTD LTD(2468000.00)

Abhiyan Co
 Chairman
 Dum Dum Municipality





Print

Organisation Chain :	MUNICIPAL AFFAIRS DEPARTMENT URBAN LOCAL BODIES DUM DUM
Tender ID :	2017_MAD_128155_1
Tender Ref No :	659/DDM/GEN/17
Tender Title :	Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications.
Cover System :	2

Committee Chairperson/Co-ordinator Type :	Internal
Committee Chairperson/Co-ordinator Name :	Chairman
Committee Members :	
Summary Details :	techsummary_224660.pdf (290.61 KB)
Summary uploaded on :	23-Nov-2017 04:08 PM
Bid Opening Date & Time for Financial :	23-Nov-2017 04:10 PM

No. of Bids : 4

Bid List						
S.No	Bid Number	Bidder Name	Opened By	Submitted Date	Status	Reason
1	697156	FUTURE AUTOMOBILE AGENCY PVT. LTD	Kashi Nath Roy Choudhury	21-Sep-2017 09:11 PM	Accepted	Admitted
2	701204	LEXUS MOTORS LTD	Kashi Nath Roy Choudhury	10-Oct-2017 01:21 AM	Accepted	Admitted
3	728510	QUALITY ENVIRO ENGINEERS PRIVATE LIMITED	Kashi Nath Roy Choudhury	04-Nov-2017 08:08 PM	Rejected	Not Admitted
4	730782	ABHIYAN DEALCOMM PVT LTD	Kashi Nath Roy Choudhury	06-Nov-2017 07:45 PM	Accepted	Admitted

Tender Inviting Authority

TECHNICAL BID SCRUTINY SHEET

Name of Work :- Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications

Tender Id:-2017 MAD 128155 1 Tender Ref No :- 659/DDM/GEN/17 Value of Work: NA EMD: 55,000

Sl. No.	Name & Address of the Applicant	EMD Details	G.S.T	PAN	I.T. RETURN	Company Detail	Annual Turn Over (last 3-years)	Submitted Credential		REMARKS if any
								In Nature	Completion certificate	
1	ABHIYAN DEALCOMM PVT LTD	ICICI Bank 26-10-2017	Submitted	Submitted	15-16 16-17 17-18	submitted	14-15 15-16 16-17	Submitted	NA	
2	FUTURE AUTOMOBILE AGENCY PVT. LTD	State Bank of India 06-11-2017	Submitted	Submitted	15-16 16-17 17-18	submitted	14-15 15-16 16-17	Submitted	NA	
3	LEXUS MOTORS LTD	Allahabad Bank 09-10-2017	Submitted	Submitted	14-15 15-16 16-17	submitted	13-14 14-15 15-16	Submitted	NA	
4	QUALITY ENVIRO ENGINEERS PRIVATE LIMITED	NSIC	Submitted	Submitted	15-16 16-17 17-18	submitted	14-15 15-16 16-17	Submitted	NA	REQUESTED DETAILS WERE NOT FURNISHED WHICH WERE ASKED BY PML ON 10/11/17. REQS MAIL CAME ON 12/11/17. NO DETAILS

KM
Executive Officer
Dum Dum Municipality

AS
Chairman
Dum Dum Municipality

Tender Fee Exemption Allowed	Yes	EMD Payable To	Chairman, Dum Dum Municipality	EMD Payable At	Kolkata
------------------------------	-----	----------------	--------------------------------	----------------	---------

Work / Item(s)

Title	Supply and Commissioning of Battery Operated Hydraulic Dumper as per attached Specifications. 12 Numbers				
Work Description	Supply and Commissioning of Battery Operated Hydraulic Dumper as per attached Specifications. 12 Numbers				
Pre Qualification Details	Please refer Tender documents.				
Independent External Monitor	NA				
Tender Value in ₹	0.00	Product Category	Vehicles	Sub category	Battery Operated Hydraulic Dumper
Contract Type	Tender	Bid Validity(Days)	30	Period Of Work(Days)	90
Location	Dum Dum Municipal Office	Pincode	700028	Pre Bid Meeting Place	NA
Pre Bid Meeting Address	NA	Pre Bid Meeting Date	NA	Bid Opening Place	Dum Dum Municipal Office

Critical Dates


Publish Date	13-Sep-2017 04:30 PM	Bid Opening Date	13-Oct-2017 04:30 PM
Document Download / Sale Start Date	13-Sep-2017 04:30 PM	Document Download / Sale End Date	11-Oct-2017 04:00 PM
Clarification Start Date	NA	Clarification End Date	NA
Bid Submission Start Date	13-Sep-2017 04:40 PM	Bid Submission End Date	11-Oct-2017 04:00 PM
Financial Bid Opening Date	23-Oct-2017 04:30 PM		

Tender Documents

NIT Document	S.No	Document Name	Description	Document Size (in KB)
	1	Tendernotice_1.pdf	Supply and Commissioning of Battery Operated Hydraulic Dumper as per attached Specifications. 20 Numbers	2272.98

Work Item Documents	S.No	Document Type	Document Name	Description	Document Size (in KB)
	1	Tender Documents	NIETweb.pdf	NIT	2259.74
	2	Tender Documents	FORM1.pdf	Form - Please dont write any rate on this form	747.63
	3	Tender Documents	BoQ1.xls	Bill of Quantities	49.50

Latest Corrigendum List

S.No	Corrigendum Title	Corrigendum Type	View
1	Time Extension	Date	

Bid Openers List

S.No	Bid Opener Login Id	Bid Opener Name	Bid Opener Designation
1.	rsubarnam@gmail.com	SUBARNA KUMAR DUTTA	AE
2.	kroychaudhury@gmail.com	Kashi Nath Roy Choudhury	EO
3.	vcumdum@gmail.com	Barun Natta	Vice Chairman



West Bengal Tenders

eProcurement System of Government of West Bengal

Tender Details

Date : 27-Nov-2017 02:45 PM

Print

Basic Details			
Organisation Chain	MUNICIPAL AFFAIRS DEPARTMENT URBAN LOCAL BODIES DUM DUM		
Tender Reference Number	662/DDM/GEN/17		
Tender ID	2017_MAD_128446_2		
Tender Type	Open Tender	Form of contract	Item Wise
Tender Category	Goods	No. of Covers	2
General Technical Evaluation Allowed	No	ItemWise Technical Evaluation Allowed	No
Payment Mode	Offline	Is Multi Currency Allowed For BOQ	No
Is Multi Currency Allowed For Fee	No		

Payment Instruments			Cover Details, No. Of Covers - 2			
Offline	S.No	Instrument Type	Cover No	Cover	Document Type	Description
	1	BC - Bankers Cheque	1	Fee/PreQual /Technical	.pdf	NIT
	2	DD - Demand Draft			.pdf	FORM
			2	Finance	.xls	BILL OF QUANTITIES

Other Important Documents				
S.No	Category	Sub Category	Sub Category Description	Format/File
1	CERTIFICATES	CERTIFICATES	VAT/SALES TAX REGISTRATION CERTIFICATE ALONG WITH ACKNOWLEDGEMENT , PAN, LATEST IT ACKNOWLEDGEMENT, PTAX, LABOUR LICENCE	
2	CERTIFICATES	GST Registration Certificate	GST Registration Certificate	
3	CERTIFICATES	P/ L and Balance Sheet 2016-2017	P/ L and Balance Sheet 2016-2017	
4	COMPANY DETAILS	COMPANY DETAILS 1	PARTNERSHIP DEED, CO-OPERATIVE SOCIETY BYLAW, MOA, TRADE LICENCE, COMPANY REGISTRATION CERTIFICATE	
5	COMPANY DETAILS	COMPANY DETAILS 2	COMPANY DETAILS 2	
6	CREDENTIAL	CREDENTIAL 1	CREDENTIAL 1	
7	FINANCIAL INFO	P/L AND BALANCE SHEET 2014-15	P/L AND BALANCE SHEET 2014-15	
8	FINANCIAL INFO	P/L AND BALANCE SHEET 2015-16	P/L AND BALANCE SHEET 2015-16	
9	FINANCIAL INFO	P/L AND BALANCE SHEET 2016-2017	P/L AND BALANCE SHEET 2016-2017	

Tender Fee Details, [Total Fee in ₹ * - 10,000]				EMD Fee Details			
Tender Fee in ₹	10,000			EMD Amount in ₹	50,000	EMD Exemption Allowed	Yes
Fee Payable To	Chairman, Dum Dum Municipality	Fee Payable At	Kolkata	EMD Fee Type	fixed	EMD Percentage	NA

Tender Inviting Authority

Name	Executive Officer
Address	44, Dr Sailen Das Sarani, Kolkata 700028

Tender Creator Details

Created By	Kashi Nath Roy Choudhury
Designation	EO
Created Date	13-Sep-2017 03:53 PM

OFFICE OF THE MUNICIPAL COUNCILLORS OF DUM DUM
44, Dr. Sainen Das Sarani, Kolkata – 700028

No. : 927/DDM/GEN/17

Date: 24-11-17

From : Chairman
Dum Dum Municipality

To :

1. Kulkarni Power Tools Ltd
1/1 Kimber Street,
Kolkata 700017
2. Pawanputra Machine Tools Pvt Ltd
69A, Serpentine Lane,
Kolkata 700014

Sub: Supply Order for "Supply and Commissioning of Battery Operated Hydraulic Dumper 12pcs in total (6 uncovered and 6 covered)"

Tender Notice No: 662/DDM/GEN/17 Dtd: 11.9.2017

[Supply Order Value]

1. Kulkarni Power Tools Ltd – 2,19,520x6=13,17,120] – Without Cover
2. Pawanputra Machine Tools Pvt Ltd – 2,24,000x6=13,44,000] – With Cover

Sir,

I am hereby pleased to accept your tender for the above work at the above mentioned being the lowest/negotiated rate. You are, therefore, requested to supply the above positively within 7 days from the date of receipt of this Work Order. You are also instructed to execute an agreement on a stamp paper (valued at Rs.10.00) within 7 (seven) days from the date of receipt of this work order.

Failure to comply with the above requirements will tantamount to cancellation of this work order.

Thanking you,



Yours faithfully,

H Am G
Chairman

Dum Dum Municipality
Chairman

Dum Dum Municipality
44, Dr. Sainen Das Sarani
Dum Dum, Kolkata-700028
Date: 24-11-17

H Am G
Chairman

Dum Dum Municipality

Dum Dum Municipality
44, Dr. Sainen Das Sarani
Dum Dum, Kolkata-700028

No: 927(1)/DDM/GEN/17

Copy Forwarded for information:-

1. The Finance Officer, Dum Dum Municipality
2. The Accountant, Dum Dum Municipality



E-mail: chairmanddm@yahoo.com, Phone: 2551-3017, Fax: 2549-5214



Print

Organisation Chain	MUNICIPAL AFFAIRS DEPARTMENT URBAN LOCAL BODIES DUM DUM
Tender ID	: 2017_MAD_128446_2
Tender Ref No	: 662/DDM/GEN/17
Tender Title	: Supply and Commissioning of Battery Operated Hydraulic Dumper as per attached Specifications. 12 Numbers
Cover System	: 2

Contract Date	: 24-Nov-2017
Contract Value	: INR 2661120.00
Work Completion Period (in days)	: 7
AOC document	: AOCbattopdump.pdf (307.00 KB)
AOC Description	:

Awarded Bids List

S.No	Bid Number	Bidder Name	Awarded Currency	Awarded Value
1	695793	Pawanputra Machine Tools Private Limited	INR	1344000.00
2	708410	KULKARNI POWER TOOLS LTD	INR	1317120.00

Congratulations! You have been awarded the contract for this tender.

Tender Inviting Authority



Print

Organisation Chain : MUNICIPAL AFFAIRS DEPARTMENT URBAN LOCAL BODIES DUM DUM
Tender ID : 2017_MAD_128446_2
Tender Ref No : 662/DDM/GEN/17
Tender Title : Supply and Commissioning of Battery Operated Hydraulic Dumper as per attached Specifications. 12 Numbers
Cover System : 2

Committee Chairperson/Co-ordinator Type : Internal
Committee Chairperson/Co-ordinator Name : Chairman
Committee Members :
Summary Details : finsummary_226154.pdf (357.5 KB)
Summary uploaded on : 23-Nov-2017 02:00 PM

No. of Bids : 3

Bid List								
S.No	Bid Number	Bidder Name	Opened By	Submitted Date	Quoted Amount in ₹	Rank	Status	Reason
1	695793	Pawanputra Machine Tools Private Limited	Kashi Nath Roy Choudhury	21-Sep-2017 06:49 PM	28,08,960.00	L3	Accepted	L3
2	697221	FUTURE AUTOMOBILE AGENCY PVT. LTD	Kashi Nath Roy Choudhury	21-Sep-2017 09:35 PM	27,14,400.00	L2	Accepted	L2
3	708410	KULKARNI POWER TOOLS LTD	Kashi Nath Roy Choudhury	10-Oct-2017 01:57 PM	26,34,240.00	L1	Accepted	L1

Tender Inviting Authority

eProcurement System of Government of West Bengal
 Tender Title: 662DDM/GEN/17
 Tender Id: 2017_MAD_128446_2

Tender Inviting Authority: Executive Officer, Dum Dum Municipality
 Name of Work: Supply and Commissioning of Battery Operated Hydraulic Dumper as per attached Specifications, 12 Numbers
 Contract No:

Sl.No	Description of Work / Item(s)	SCHEDULE OF WORK / ITEM(S)			Pawanputra Machine Tools Private Limited		FUTURE AUTOMOBILE AGENCY PVT. LTD		KULKARNI POWER TOOLS LTD.	
		No. of Qty	Units	Estimated Rate	Rate	Amount	Rate	Amount	Rate	Amount
1.0	Supply and Commissioning of Battery Operated Hydraulic Dumper as per attached Specifications. 12 Numbers	12	Nos	0.00	234080	2808960	226200	2714400	219520	2634240

L1 Amount	L1 Vendor
2634240	KULKARNI POWER TOOLS LTD

Total in Figures 2808960

2714400

2634240

Lowest Amount Quoted BY: KULKARNI POWER TOOLS LTD(2634240.00)

ALL 3 PARTIES WERE REQUESTED TO SHOW THEIR VEHICLES. FUTURE AUTO MOBILE DID NOT RESPOND TO THE FINAL LETTER SENT ON OCT 26. ALL DATE. FUTURE AUTOMOBILE HAS L2 STATUS.
 L1 (KPT) SHOWED HIS VEHICLE BUT THERE IS NO COVER ON THE CARRIER. L3 HAD PREVIOUSLY SHOWN US COVERED PRODUCT AND UPON OUR REQUEST THEY HAVE ASKED TO SUPPLY SIX COVERED DUMPERS IN A NEGOTIATED PRICE OF 2,00,000 + GST WITH COVER.
 WE NEED BOTH COVERED AND UNCOVERED DUMPERS HENCE IT IS DECIDED BY THE MUNICIPALITY THAT SUPPLY ORDER MAY BE ISSUED TO KPT (6 UNCOVERED) & 6 COVERED TO Pawanputra.

As per our verbal conversation, we will supply & commission the Battery Operated (with covered) Hydraulic dumper @ 2,00,000 + GST (12%) each.



[Signature]
 Chairman
 Dum Dum Municipality

TECHNICAL BID SCRUTINY SHEET

Name of Work :- Supply and Commissioning of Battery Operated Hydraulic Dumper as per attached Specifications. 12 Numbers


Tender Id:-2017 MAD_128446_2

Tender Ref No :-662/DDM/GEN/17

e-N.I.T No.:- 662/DDM/GEN/17

Value of Work: NA EMD: 50,000

Sl. No.	Name & Address of the Applicant	EMD Details	G.S.T	PAN	I.T. RETURN	Company Detail	Annual Turn Over (last 3-years)	Submitted Credential		REMARKS if any
								In Nature	Completion certificate	
1	FUTURE AUTOMOBILE AGENCY PVT. LTD	Bank of India 21-09-2017	Submitted	Submitted	14-15 15-16 16-17	submitted	13-14 14-15 15-16	Submitted	Submitted	
2	KULKARNI POWER TOOLS LTD	ICICI Bank 14-09-2017	Submitted	Submitted	14-15 15-16 16-17	submitted	13-14 14-15 15-16	Submitted	Submitted	
3	Pawanputra Machine Tools Private Limited	HDFC Bank 16-09-2017	Submitted	Submitted	14-15 15-16 16-17	submitted	13-14 14-15 15-16	Submitted	Submitted	


 Chairman
 Dum Dum Municipality

Executive Officer
 Dum Dum Municipality

BOQ Summary Details
Tender Title: 662/DDM/GEN/17
Tender Id: 2017_MAD_128446_2

Sheet Name	Sl.No	Bidder Name	Amount	Bid Rank
BoQ1	1	KULKARNI POWER TOOLS LTD	2634240	L1
	2	FUTURE AUTOMOBILE AGENCY PVT. LTD	2714400	L2
	3	Pawanputra Machine Tools Private Limited	2808960	L3

all
Executive Officer
Dum Dum Municipality

Fee Payable To	Chairman, Dum Dum Municipality	Fee Payable At	Kolkata	EMD Fee Type	fixed	EMD Percentage	NA
Tender Fee Exemption Allowed	Yes			EMD Payable To	Chairman, Dum Dum Municipality	EMD Payable At	Kolkata

Work / Item(s)

Title	Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications.				
Work Description	Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications.				
Pre Qualification Details	Please refer Tender documents.				
Independent External Monitor	NA				
Tender Value in ₹	0.00	Product Category	Vehicles	Sub category	Dumper
Contract Type	Tender	Bid Validity(Days)	120	Period Of Work(Days)	30
Location	Dum Dum Municipal Area	Pincode	700028	Pre Bid Meeting Place	NA
Pre Bid Meeting Address	NA	Pre Bid Meeting Date	NA	Bid Opening Place	Dum Dum Municipal Office

Critical Dates



Publish Date	08-Sep-2017 05:00 PM	Bid Opening Date	09-Nov-2017 04:30 PM
Document Download / Sale Start Date	08-Sep-2017 05:00 PM	Document Download / Sale End Date	07-Nov-2017 04:00 PM
Clarification Start Date	NA	Clarification End Date	NA
Bid Submission Start Date	08-Sep-2017 05:10 PM	Bid Submission End Date	07-Nov-2017 04:00 PM
Financial Bid Opening Date	23-Nov-2017 04:10 PM		


Tender Documents

NIT Document	S.No	Document Name	Description	Document Size (in KB)
	1	Tendernotice_1.pdf	Supply and Commissioning of truck chassis mounted 10 Cubic Mtr Dumper as per attached Specifications.	2329.28

Work Item Documents	S.No	Document Type	Document Name	Description	Document Size (in KB)
	1	Tender Documents	NITweb.pdf	NIT Document	2316.02
	2	Tender Documents	FORM1.pdf	Tender Form - Please dont write any rates on this form	747.63
	3	Tender Documents	BoQ1.xls	Bill of Quantities	49.50

Latest Corrigendum List

S.No	Corrigendum Title	Corrigendum Type	View
1	Time Extension6	Date	
2	IMPORTANT ADDITIONAL INFORMATION	Other	



West Bengal Tenders

eProcurement System of Government of West Bengal

Tender Details

Date : 27-Nov-2017 02:44 PM

Print

Basic Details

Organisation Chain	MUNICIPAL AFFAIRS DEPARTMENT URBAN LOCAL BODIES DUM DUM		
Tender Reference Number	659/DDM/GEN/17		
Tender ID	2017_MAD_128155_1		
Tender Type	Open Tender	Form of contract	Item Wise
Tender Category	Goods	No. of Covers	2
General Technical Evaluation Allowed	No	ItemWise Technical Evaluation Allowed	No
Payment Mode	Offline	Is Multi Currency Allowed For BOQ	No
Is Multi Currency Allowed For Fee	No		

Payment Instruments

Offline	S.No	Instrument Type
	1	BC - Bankers Cheque
	2	DD - Demand Draft

Cover Details, No. Of Covers - 2

Cover No	Cover	Document Type	Description
1	Fee/PreQual /Technical	.pdf	NIT
		.pdf	Form
2	Finance	.xls	Bill of Quantities

Other Important Documents

S.No	Category	Sub Category	Sub Category Description	Format/File
1	CERTIFICATES	CERTIFICATES	VAT/SALES TAX REGISTRATION CERTIFICATE ALONG WITH ACKNOWLEDGEMENT , PAN, LATEST IT ACKNOWLEDGEMENT, PTAX, LABOUR LICENCE	
2	CERTIFICATES	GST Registration Certificate	GST Registration Certificate	
3	CERTIFICATES	The Micro, Small and Medium Enterprises Certificate	The Micro, Small and Medium Enterprises Certificate	
4	CERTIFICATES	P/ L and Balance Sheet 2016-2017	P/ L and Balance Sheet 2016-2017	
5	COMPANY DETAILS	COMPANY DETAILS 1	PARTNERSHIP DEED, CO-OPERATIVE SOCIETY BYLAW, MOA, TRADE LICENCE, COMPANY REGISTRATION CERTIFICATE	
6	COMPANY DETAILS	COMPANY DETAILS 2	COMPANY DETAILS 2	
7	CREDENTIAL	CREDENTIAL 1	CREDENTIAL 1	
8	FINANCIAL INFO	P/L AND BALANCE SHEET 2014-15	P/L AND BALANCE SHEET 2014-15	
9	FINANCIAL INFO	P/L AND BALANCE SHEET 2015-16	P/L AND BALANCE SHEET 2015-16	
10	FINANCIAL INFO	P/L AND BALANCE SHEET 2016-2017	P/L AND BALANCE SHEET 2016-2017	

Tender Fee Details, [Total Fee in ₹ * - 10,000]

Tender Fee in ₹	10,000
-----------------	--------

EMD Fee Details

EMD Amount in ₹	55,000	EMD Exemption Allowed	Yes
-----------------	--------	-----------------------	-----

Openers List

S.No	Bid Opener Login Id	Bid Opener Name	Bid Opener Designation
1.	rsubarnam@gmail.com	SUBARNA KUMAR DUTTA	AE
2.	ikroychaudhury@gmail.com	Kashi Nath Roy Choudhury	EO
3.	vcduumdum@gmail.com	Barun Natta	Vice Chairman

Tender Inviting Authority

Name	Executive Officer
Address	44, Dr Sailen Das Sarani, Kol 28

Tender Creator Details

Created By	Kashi Nath Roy Choudhury
Designation	EO
Created Date	08-Sep-2017 04:14 PM

T-01

Phone No. : 2551-3017

OFFICE OF THE MUNICIPAL COUNCILLORS OF DUM DUM

44, Dr. Sainen Das Sarani, Kolkata – 700028.

No. DDM/PWD/468 /2017-18

Dated : 11.10.2017

From :

Sri Harendra Singh,
Chairman,
Dum Dum Municipality,
Kolkata – 700028.

To

M/S. PAWANPUTRA MACHINE TOOLS PVT. LTD.,
69A, Serpentine Lane,
Kolkata - 700014

Sub :- Supply of Tri-Cycle Van (Galv. Sheet Body-Conventional Type) - 12Nos.
Ref. : Tender Notice No. 722(7)/DDM/GEN/2017 Dated : 25.09.2017

Dear Sirs,

I am hereby pleased to accept your tender dated 10.10.2017 for Supply of Tri-Cycle Van (Galv. Sheet Body-Conventional Type) as per specification mentioned in the Tender Notice as mentioned above @ **Rs.16,800.00 (Rupees Sixteen thousand and Eight hundred) only each + GST @12%** being the lowest rate. You are, therefore, requested to supply the above Tri-Cycle Van (Galv. Sheet Body-Conventional Type) by the **15.11.2017**, failing which the authority can take any steps against you. You are also instructed to execute an agreement on a duly stamp paper (valued at Rs.10.00) within 7 (seven) days from the date of receipt of this work order. Please note that the said ~~Cycle van~~ should be approved by the Municipal Authority before delivery in the Office.

Failure to comply with the above requirements will tantamount to cancellation of this order.

Yours faithfully,



[Signature]
Chairman

Dum Dum Municipality.
Chairman
Dum Dum Municipality

Dated : 11.10.2017

No. DDM/PWD/468 (5)/2017-18

Copy forwarded for information to :-

- 1) Vice-Chairman, Dum Dum Municipality,
- 2) Member, Chairman-in-Council, Health & Sanitation Deptt., DDM
- 3) Finance Officer, Dum Dum Municipality,
- 4) Accountant, Dum Dum Municipality,
- 5) Sanitary Inspector, Dum Dum Municipality.

[Signature]

Chairman,
Dum Dum Municipality
Chairman
Dum Dum Municipality



T-01

COMPARATIVE STATEMENT
OF RATES FOR

Sub :- Supply of Tri-Cycle Van (Galv. Sheet Body-Conventional Type).

Ref. : Tender Notice No. 722(7)/DDM/GEN/2017 Dated : 25.09.2017

Sl.No.	Name of the Contractor	Rates
1.	M/S. PAWANPUTRA MACHINE TOOLS PVT. LTD. 69A, Serpentine Lane, Kolkata - 14	Rs.16,800.00/Each + GST @ 12% = Rs.18,816.00
3.	M/S. BENGAL METAL WORKS 69/A, Serpentine Lane, Kolkata - 14 .	Rs.17,000.00.00/Each + GST @ 12% =Rs.19,040.00
4.	M/S. CHATTERJEE & CO. 68, Serpentine Lane, Kolkata - 14	Rs.18,000.00/Each + GST @ 12% =Rs.20,160.00

N.B. Red mark indicates the lowest rate.

Prepared by: *Q. Balu*



Accepted lowest rate
issue work order

Chairman
Chairman
Dum Dum Municipality

OFFICE OF THE COUNCILLORS DUM DUM MUNICIPALITY
44, Dr. Sailen Das Sarani, Kolkata - 700028

Memo No.: 722(2)/DDM/GBN/2017

Dated : 25/09/2017

NOTICE

Sealed Tenders in prescribed forms are invited from the reputed dealer / supplier and will be received by the undersigned upto 2.00 P.M. on the 11.10.2017 for the undernoted items. Tender forms with specification etc. may be obtained from the Sanitary Department of Dum Dum Municipality during Office Hours. Tender forms may be obtained by producing the current Trade Licence, PAN Card and Professional Tax Deposit Challan for the current year and GST Registration No. An Earnest Money of Rs. 5,000/- will have to be deposited at the time of submission of Tender Forms by the Pay Order / Bank Draft / NSC (endorsed in the name of Chairman, Dum Dum Municipality by the concerned Post Master). Last date for submitting the application form for obtaining necessary permission for purchasing the tender forms is 09.10.2017. No Tender Forms will be issued on the closing day. The sealed tender will be opened at 2.30 P.M. on 11.10.2017 by the undersigned in presence of the tenderers or their authorised representative.

Municipal Authority reserves the right to accept or reject any of the tender without giving reason whatsoever.

Tri-Cycle Van (Galv. Sheet Body-Conventional Type) :- Capacity 15 e.f.t., Size - 4'-0" x 2'-9" x 1'-6", Frame made of 35 x 35 x 6 mm, 25 x 25 x 3 mm M.S. Angle and 25 x 6 mm M.S. Flat, at top 25 x 25 x 3 mm M.S. Angle.

Body made of 18 gauge Galva, Sheet with riveting / welding : Body fitted on Standard Tri-Cycle Van fittings i.e. Frame, Fork, Handle, Gear, Racer, Rim, all are KW Products with Axle :- length 3'-10", made of 1" dia. M.S. Round with Chassis, KW, Birdi Chain, N.B.C./KW Bearing, Birdi 22T full ball free, KKW Back Hubs & Front Hubs, Ellora, Anchor Spoke, Heavy duty Bearing Cover, Heavy duty Free & Jum socket with six bolts, 7" long Front Axle, Screw Racer & Ball Racer with check nut, Complete Seat with Cover. Heavy duty Front Brake, KW Mudguard, 12 mm M.S. Rod Fork Gourd with M.S. Fork Gourd Plate, 18 mm M.S. Round Back Stay, Chassis Clamp - 30x6 mm M.S. Flat, Chassis Tana Patti 25 x 6 mm and others parts are standard Tri-Cycle Van fittings, with three Nos. pneumatic Tyre with Tube of reputed concern make with Painting on iron portion only.



H. M. G.
Chairman

Dum Dum Municipality

Memo No.: 722(7)/DDM/GBN/2017

Dated : 25/09/2017

Copy forwarded for information & publicity to :-

1. The Office Notice Board of Dum Dum Municipality.
2. The Office Notice Board D.D.M.S.H. & C.R.C. of Dum Dum Municipality.
3. The Finance Officer, Dum Dum Municipality.
4. The Accountant, Dum Dum Municipality.
5. The O.C., Dum Dum Police Station.
6. The Post Master, Dum Dum Post Office.
7. The Station Master, Dum Dum Cantonment Station.

H. M. G.
Chairman
Dum Dum Municipality
44, Dr. Sailen Das Sarani
Dum Dum, Kolkata-700028

M
25/9/17



OIC
25/09/17

H. M. G.
Chairman
Dum Dum Municipality
Chairman
Dum Dum Municipality
44, Dr. Sailen Das Sarani
Dum Dum, Kolkata-700028



Secy/UD/Am.
09/11/2017

भारतीय विमानपत्तन प्राधिकरण
AIRPORTS AUTHORITY OF INDIA

No. AAC/GFS-19/AEMCI 2900

Dated: 3rd November, 2017

To,

Principal Secretary (Home), Govt. of WB
& Chairman, AEMC
Nabarua, 325 Sarat Chatterjee Road
Howrah - 711 102

All Members, AEMC
NSCBI Airport, Kolkata

Sub: **Airfield Environment Management Committee (AEMC) Meeting**

Sir,


The Airfield Environment Management Committee (AEMC) meeting for the year 2017 has been scheduled on 13.11.2017 at 1100 hrs in the Conference Hall, 3rd Floor, New Operational Building, NSCBI Airport Kolkata-52 under the Chairmanship of Shri Atri Bhattacharya, IAS, Principal Secretary (Home), Govt. of West Bengal.

The agenda points for the said meeting are enclosed.

All members are requested to kindly make it convenient to positively attend the meeting.

Thanking you,

Yours faithfully,


31/11/2017
(Ashok Srivastava)
Dy. Airport Director
For Airport Director

Encl: As above

Distribution:

1. Principal Secretary (Environment), Prani Sampad Bhawan, 5th Floor, LB-2, Sector-III, Salt Lake, Kolkata - 700 106.
2. Secretary (Municipal Affairs & Urban Development), DS-8, Salt Lake, Sector-1, Kolkata - 700 106.
3. Spl. Secretary (Environment), Prani Sampad Bhawan, 5th Floor, LB-2, Sector-III, Salt Lake, Kolkata - 700 106.
4. District Magistrate, District North 24 Parganas, Barasat, Kolkata-700124

Contd.....P2

:: 2 ::

:: 2 ::

5. **Commissioner of Police, Bidhannagar Police Commissionerate**, Salt Lake stadium Complex, Gate No. 03, Sector-III, Kolkata-700 106
6. **Mayor, Bidhannagar Municipal Corporation**, Poura Bhawan, FD block, 415A, Salt Lake City, Sector-III, Kolkata- 700 106.
7. **Dy. Mayor, Bidhannagar Municipal Corporation**, Poura Bhawan, FD block, 415A, Salt lake City, Sector-III, Kolkata-700 106.
8. **Chairman, Dum Dum Municipality**, 44, Dr. Siten Das Sarani, Gora Bazar, Kolkata-700028
9. **Chairman, North Dum Dum Municipality**, 163, M. B. Road, Birati, Kolkata-700051
10. **Chairperson, New Barrackpore Municipality**, 112, Ashutosh Mukherjee Road, New Barrackpore, Kolkata-700131.
11. **Chairman, Madhyamgram Municipality**, Madhyamgram, Kolkata-700129
12. **Regional Controller of Air Safety, DGCA, NSCBI Airport** Kolkata-700052
13. **Chairman, AOC, C/o Jet Airways, NSCBI Airport** Kolkata-700052

Co-opted Members

1. **Pr. Secretary (PWD)**, Govt. of WB, Nabanna, 325, Sarat Chatterjee Road, 8th Floor, Howrah-711102
2. **Principal Chief Conservator of Forests (Wildlife)**, Govt. of WB, Bikash Bhawan, North Block, 3rd Floor, Salt Lake, Kolkata-700091
3. **Member Secretary, West Bengal Pollution Control Board**, Paribesh Bhavan, 10A, block- LA , Sector-III, Salt Lake, Kolkata-700098
4. **Director, Zoological Survey of India**, Prani Vigyan Bhawan, M-Block, New Alipore, Kolkata-700053
5. **Chief Engineer (South), Irrigation & Waterways Department**, Govt. of WB, Jaisampad Bhavan, Ground Floor, Salt Lake, Kolkata-700091
6. **Executive Engineer, NH Divn.-5, Public Works (Rds.) Directorate**, Mackintosh Burn Ltd. House, 4th Floor, DD-18/8, Sector-I, Salt Lake, Kolkata-700064

Internal Members

1. **CASO / Sr. Commandant, CISF, NSCBI Airport** Kolkata-700052
2. **General Manager (ATM), AAI, NSCBI Airport** Kolkata-700052
3. **General Manager (Aero) ER, AAI, NSCBI Airport** Kolkata-700052
4. **General Manager (Ops), Air India Ltd, NSCBI Airport** Kolkata-700052

Airfield Environment Management Committee
(AEMC) Meeting for the year 2017

AGENDA

1. Review of the minutes of the last meeting held on 19.01.2016.
2. Increasing bird hit incidents in approach / take off path concern to flight safety.
3. Observations on of upkeep of areas of various municipalities falling within 10 km of radius.
4. Support required from Forest Department to eradicate the presence of wildlife inside operation area.
5. Any other issue with permission of chair.

The following Members were present in the Aerodrome Committee meeting –

Sh. Malay Kr. De, IAS, Addl. Chief Secretary (Home)	-	Chairman AEMC
Sh. A. K. Sharma, Airport Director	-	Convener, AEMC

Govt. of West Bengal

1. Sh. Chandan Sinha, Pr. Secretary (Environment)
2. Sh. B. P. Gopalika, Pr. Secretary (Municipal Affairs)
3. Addl. District Magistrate (LR), North 24 Pgs.
4. Sh. Raj K. Mahtolia, IFS, Addl. PCCF (Wildlife)
5. Sh. Kalyan Das, IFS, Chief Conservator of Forests & CF/Wildlife (HQ), WB
6. Sh. Ashim Kr. Debnath, Asst. Engineer, NH Div.-5, PW (Roads) Dte.
7. Sh. Suna Mardi, Sr. Env. Engineer, WBPCB

Municipalities/Municipal Corporation

1. Sh. Sk. Najim Uddin, Vice Chairman, North Dum Dum Municipality
2. Sh. Mihir Dey, Vice Chairman, New Barrackpore Municipality
3. Sh. M. Pal (Saha), A.E., Madhyamgram Municipality
4. Sh. Arun Kr. Sen, S. I., Dum Dum Municipality
5. Sh. Samir Majumder, Dum Dum Municipality

DGCA

1. Sh. Sanit Kumar, Regional Controller of Air Safety, DGCA

Airports Authority of India

1. Sh. M. K. Z. Azeez, General Manager (Engg-Civil)
2. Sh. S. Judson, General Manager (Engg-Elect)
3. Sh. D. Bhattacharjee, Jt. General Manager (Engg-Civil)
4. Sh. Arun Mehan, Jt. GM (GFS)
5. Sh. K. Dilip Singh, Jt. GM (Engg-Elect)
6. Sh. Rajen Gopi, Asst. General Manager (Ops)



OFFICE OF THE EXECUTIVE ENGINEER
SWM-EAST BANK DIVISION
SD & SWM SECTOR, KMDA

**Kolkata
Metropolitan
Development
Authority**

No. :- /EE/SWM-EB/SD & SWM/KMDA/W-699

Date- 15/05/2017

To
M/S D. Hati,
78/Q. J. N. Lahiri Road,
P. O.- Serampore, Dist.- Hooghly
Pin-712201.

AME (COM)
25/05/17



Sub: - Work order for "Construction of Windrow Composting Plant for Municipal Solid Waste Management Project of Bhaipara Municipality under Mission Nirmal Bangla (Urban) / Swachh Bharat Mission (Urban)".

Project Code :
e-Tendering N.I.T. No. : 10/SE/Ping./SD and SWM/KMDA of 2016-17
Dated: 22.02.17 SI No.-1
Tender ID : (2017_KMDA_102966_1)
Tender No. : 01/SE(Ping.)SD & SWM/KMDA of 2017-18
Estimated Amount : Rs. 13,55,70,556.00
Tendered Amount : Rs. 13,82,44,000.00
[Civil Portion : Rs. 12,92,71,000,
Electro-mechanical Portion : Rs. 89,73,000.00]
Time of Completion : 12 (Twelve) Months
L.O.I. No. 13/ KMDA/ SD & SWM / SE/Ping./W-108 Dated 04/05/2017

Dear Sir,

Since the formal Agreement has been executed and other formalities as described on the L.O.I. by S.E. (Ping.), vide memo No. as mentioned above have been completed. You are requested to take up the work in consultation with Sri Arup Prakash Chaudhuri and Sri Amit Das, A.E.s, SWM-EB Div., SD & SWM Sector KMDA.

Time of completion of the work is 12 (Twelve) Months from the date of issue of this letter.

In future all correspondence should be made mentioning the above Tender No. necessary labour license and bar chart depicting the probable progress of the work may also be produced to this office as early as possible.

Yours faithfully,

Sd/-

Executive Engineer,
SWM-EB Division,
SD & SWM Sector, KMDA

Copy forwarded for information to:-

- 1) The C.E.O., KMDA.
- 2) The Director, SUDA, State Mission Director, MNB (U).
- 3) The DGO, Water & Sanitation Sector, KMDA.
- 4) The DOF, KMDA.
- 5) The Chairman Bhatpara Municipality.
- 6) The C. E., ME Directorate, Govt. of West Bengal.
- 7) The C. E., Water & Sanitation Sector, KMDA.
- 8) The C. E., Project Monitoring & Co-ordination Sector, KMDA.
- 9) The C. E., E & M Sector, KMDA.
- 10) The Addl. C. E., Water & Sanitation Sector, KMDA.
- 11) The S. E. (Png.), SD & SWM Sector, KMDA.
- 12) The S. E. (South), SD & SWM Sector, KMDA.
- 13) The S. E. (North), SD & SWM Sector, KMDA.
- 14) The A.C.F.A., SD & SWM SECTOR, KMDA.
- 15) Sri Arup Prakash Chaudhuri, Asstt. Engg., SWM-EB Div., SD & SWM Sector, KMDA.
- 16) Sri Amit Das, Asstt. Engg., SWM-EB Div., SD & SWM Sector, KMDA.
- 17) Smt. Shukla Gayen, Junior Engg., SWM-EB Div., SD & SWM Sector, KMDA to look after the work.
- 18) Sri Loknath Jha, Junior Engg., SWM-EB Div., SD & SWM Sector, KMDA to look after the work.
- 19) The C.C.I.T. KOL-1(Admn.), P-7, Chowringhee Square, Kolkata-700 069.
- 20) The Senior Joint Commissioner of Commercial Taxes (Central Section), 14, Beliaghata Main Road, Kolkata-700 015.
- 21) The Residential Audit Officer, KMDA.
- 22) The Commissioner, Labour Department, Govt. of West Bengal, 6, Church lane, 3rd floor, Kolkata-700 001.
- 23) The Secretary, Vigilance Commissioner, Govt. of WB, Bikash Bhavan, Salt Lake, Kol-91
- 24) The Estimator, SWM-EB Div., SD & SWM Sector, KMDA.
- 25) The Accountant, SWM-EB Div., SD & SWM Sector, KMDA.

F. B. Choudhury
15/05/17

Executive Engineer.
SWM-EB Division,
SD & SWM Sector, KMDA



OFFICE OF THE EXECUTIVE ENGINEER
SWM-East Bank Division,
S & SWM, W & S Sector, KMDA

**Kolkata
Metropolitan
Development
Authority**

No. :- _____/EE/ SWM-EB/S & SWM,W & S/KMDA/W-706

Date- 24/10/2017

To
M/S S.G. Construction,
25/J Raja Bagan Lane,
Kolkata-700 030.



Sub: - Work order for "Design and construction of Compost Plant and allied works of Municipal Solid Waste Management project at Naihati Municipality under Mission Nirmal Bangla (Urban)/Swachh Bharat Mission (Urban))".

Project Code : 09/Sanitation & SWM/KMA/2/1 & 2/2
e-Tendering N.I.T. No. : 01/SE(S)/S & SWM, WS/KMDA of 2017-18
Dated: 22.06.17
Tender ID : (2017_KMDA_105333_1)
Tender No. : 02/SE(S)/S & SWM, WS/KMDA of 2017-18
Tendered Amount : Rs. 10,00,18,545.00
Time of Completion : 12 (Twelve) Months
L.O.I. No. 56/SE(S)/S & SWM, WS/KMDA/W-134 Dated 11/10/2017

Dear Sir,

Since the formal Agreement has been executed and other formalities as described on the L.O.I. by S.E. (South), vide memo No. as mentioned above have been completed. You are requested to take up the work in consultation with Sri Amit Das and Sri Sujit Kabiraj, A.E.s, SWM-EB Division, S & SWM, W & S Sector KMDA.

Time of completion of the work is 12 (Twelve) Months from the date of issue of this letter.

In future all correspondence should be made mentioning the above Tender No. necessary labour license and bar chart depicting the probable progress of the work may also be produced to this office as early as possible.

Yours faithfully,

sd/

Executive Engineer,
SWM-EB Division,
S & SWM, W & S Sector,
KMDA

Copy forwarded for information to:-

- 1) The C.E.O., KMDA.
- ✓ 2) The Director, SUDA, State Mission Director, MNB (U).
- 3) The DGO, Water & Sanitation Sector, KMDA.
- 4) The DOF, KMDA.
- 5) The Chairman, Naihati Municipality.
- 6-8) The Chief Engineer, W & S Sector/ E & M Sector/P M & C Sector, KMDA.
- 9) The Chief Engineer-in-Charge, S & SWM, W & S Sector, KMDA.
- 10-12) The S. E. South Circle / Planning Circle / North Circle, S & SWM,W & S Sector, KMDA.
- 13) The A.C.F.A., S & SWM, W. & S. Sector, KMDA.
- 14) Sri Amit Das, Asstt. Engg. SWM-EB Div., S & SWM, W. & S. Sector, KMDA.
- 15) Sri Sujit Kabiraj, Asstt. Engg. SWM-EB Div., S & SWM, W. & S. Sector, KMDA.
- 16) Smt. Sukla Gayen, Junior Engg., SWM-EB Div., S & SWM,W. & S. Sector, KMDA to look after the work.
- 17) Sri Loknath Jha, Junior Engg., SWM-EB Div., S & SWM,W. & S. Sector, KMDA to look after the work.
- 18) Principal C.C.I.T. –WB & Sikkim, P-7, Chowringhee Square, Kolkata-700 069.
- 19) The Senior Joint Commissioner of Commercial Taxes (Central Section), 14, Beliaghata Main Road, Kolkata-700 015.
- 20) The Residential Audit Officer, KMDA.
- 21) The Dy. Commissioner, Labour Department, Govt. of West Bengal, 6, Church lane, 3rd floor, Kolkata-700 001.
- 22) The Secretary, Vigilance Commissioner, Govt. of WB, Bikash Bhavan, Salt Lake, Kol-91
- 23) The Estimator, SWM-EB Div., S & SWM,W. & S. Sector, KMDA.
- 24) The Accountant, SWM-EB Div., S & SWM,W. & S. Sector, KMDA.

Chandhu
24/10/17

Executive Engineer,
SWM-EB Division,
S & SWM, W & S Sector,
KMDA

No: 461/1(24)EE/SWM-EB/SAN AND SWM, WAT AND SAN/ KVIDA.

From, Executive Engineer,
SWM-EB Division,
SAN and SWM, WAT and SAN
KVIDA.

{ The Director,
SUDA, State Mission Director,
MNR(U)



Kolkata Metropolitan Development Authority



SILIGURI MUNICIPAL CORPORATION

P.O. SILIGURI, DIST. DARJEELING (W.B.), ☎ 2432804, 2435444, 2433277, 2433744, 2435282, 2536311

Memo No. 119 /SMC/UPE/2017-2018

Dated 08-08-2017

From : Commissioner
Siliguri Municipal Corporation

To
The Joint Director,
ILGIS,
ILGIS Bhawan, H.C. Block,
Sector-III, Bidhannagar,
Kolkata- 700 106

**Sub : Request for sanction & release of fund
for construction of sanitary latrine.**

Sir,

As directed by the Hon'ble Mayor, I am to inform you that with reference to Comprehensive house to house survey for identification of Insanitary Latrine held on 2015, 3029 nos. of households have been identified where no latrine facility is found. Due to such open defecation, heavy pollution is widespread in Siliguri Municipal Corporation area.

I am further to inform you that DPR amounting to Rs. 2,72,61,000.00 (Rupees two crore two lakhs sixty one thousand) only has already been sent to the Director, SUDA vide Memo No. 100 SMC UPE/2017-2018 dt. 21.07.2018 regarding the above.

Therefore, you are requested to sanction necessary fund for constructing Sanitary Latrines to those insanitary households.

Thanking you.

Yours faithfully,


Commissioner
Siliguri Municipal Corporation

97

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector- I,
Salt Lake City, Kolkata – 700 064

No. 493/MA/P/C-10/3S-40/2017

Dated, Kolkata, the 30th day of April, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

Sub: Administrative Approval for cleanliness drive to 4 ULBs adjacent to Airport

Sir,

With reference to above, I am directed to inform you that in principal Administrative approval for the schemes as stated in Annexure – I are hereby accorded to take necessary steps for for cleanliness drive to 4 ULBs adjacent to Airport; subject to strict observance of all relevant rules & regulations of the State Government issued time to time including e-tendering.

Necessary fund will released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/-procurement from concerned ULBs.

This letter is issued with the approval of appropriate authority of this Department

Encl. As stated

Yours faithfully,

[Signature] 30/4/17.
Joint secretary to the Government of West Bengal

ANNEXURE

Sl. No.	Name of ULB	Name of Instrument/Equipment	Quantity	Estimated Cost (Rs.)
1	Bidannagar Municipal Corporation	Backhoe Loader	2	4000000
		Movable Compactor	1	3700000
		Tractor Mounted Trolley	5	5125000
		Battery Operated Car (Loader 350 kg. Capacity)	10	1380000
		Sub-total		
2	Madhyamgram Municipality	Movable Compactor	2	5200000
		Battery Operated Tipper	10	2200000
		Dumper	2	2600000
		Tricycle Paddle Van	75	1192500
		Trailor (4 ton Capacity)	10	970000
Sub-total			12162500	
3	North Dum Dum Municipality	Dumper	5	10000000
		Small Movable Compactor	1	2300000
		Pock Land Machine	1	6000000
		Suction as well as Jetting Machine	1	2000000
		Battery Operated Tipper	5	1000000
Sub-total			21300000	
4	Dum Dum Municipality	1.8 Cu.M Hooper Tipper	10	5500000
		Suction Pump	2	7000000
		Backhoe Loader (JCB)	1	2650000
		Battery Operated Hydraulic Dumper	2	410000
		Sub-total		
Grand Total				63227500

GOVERNMENT OF WEST BENGAL
DEPARTMENT OF URBAN DEVELOPMENT AND MUNICIPAL AFFAIRS
MUNICIPAL AFFAIRS BRANCH, POUA PRASHASAN BHAVAN
DD-1, SALT LAKE, KOLKATA - 700064

No. 906/MA/P/C-10/3S-126/2017

Dated Kolkata the 22nd September, 2017

From : Joint Secretary to the Government of West Bengal
To : Commissioner,
Bidhannagar Municipal Corporation
Poua Bhavan, Block – FD. Salt Lake
Kolkata - 700091

Sub : Administrative Approval for allotment of fund for Special Cleanliness work
from 08.09.2017 to 31.10.2017 due to FIFA U-17 World Cup
Ref: Your No. 27(Con)/Comm/BMC/2017/ dated 13.09.2017

Sir,

In continuation of this Department's earlier No. 905/MA/P/C-10/3S-126/2017 dated 22.09.2017 I am directed to convey Administrative Approval for "Special Cleanliness work from 08.09.2017 to 31.10.2017 due to FIFA U-17 World Cup under Bidhannagar Municipal Corporation", at an estimated cost of Rs. 1,00,51,160/- (Rupees one crore fifty one thousand one hundred sixty) only subject to strict observation of all relevant rules and regulations of the State Government issued time to time including e-tendering.

Necessary fund to be spent from fund already released vide sanction GO No. 196(Sanction)/MA/N/C-2/1G-6/2017 dated 13.07.2017 under Head of Account code "2217-05-192-NP-006-31-02-V". Utilization Certificate in proper format to be submitted at the earliest.

This letter is issued with the approval of appropriate authority of this Department.

Yours faithfully

Sd/-

Joint Secretary to the Government of West Bengal

No. 906/1/MA/P/C-10/3S-126/2017

Dated Kolkata the 22nd September, 2017

Copy forwarded for information to :
✓ Director, SUDA, ILGUS Bhavan, Block HC, Salt Lake, Sector III, Kolkata 700 106 with reference
to his U.O. No. SUDA- 509/2017 dated 15.09.17

Meer
Joint Secretary

**GOVERNMENT OF WEST BENGAL
DEPARTMENT OF URBAN DEVELOPMENT AND MUNICIPAL AFFAIRS
MUNICIPAL AFFAIRS BRANCH
PRASHASAN BHAVAN
DD-1, SALT LAKE, KOLKATA - 700064**

No. 905/MA/P/C-10/1G-14/2017

Dated Kolkata the 22nd September, 2017

From : Joint Secretary to the
Government of West Bengal

✓ To : Commissioner,
Bidhannagar Municipal Corporation
Poura Bhavan, Block – FD. Salt Lake
Kolkata - 700091

**Sub : Administrative Approval for allotment of fund for Special Cleanliness work
from 08.09.2017 to 31.10.2017 due to FIFA U-17 World Cup**


Sir,

With reference to above, I am directed to convey Administrative Approval for "Special Cleanliness work from 08.09.2017 to 31.10.2017 due to FIFA U-17 World Cup under Bidhannagar Municipal Corporation", subject to strict observation of all relevant rules and regulations of the State Government issued time to time including e-tendering.

Necessary fund to be spent from fund already released vide sanction GO No. 196(Sanction)/MA/N/C-2/1G-6/2017 dated 13.07.2017 under Head of Account code "2217-05-192-NP-006-31-02-V". Utilization Certificate in proper format to be submitted at the earliest.

This letter is issued with the approval of appropriate authority of this Department.

Yours faithfully


Joint Secretary to the
Government of West Bengal



Director, SUDA <wbsudadir@gmail.com>

Admn. Approval of Bidhannagar MC


1 message

Joint Secretary MA & UD Department <jsudmadeptt@gmail.com>
To: "Director, SUDA" <wbsudadir@gmail.com>

Thu, Sep 21, 2017 at 2:51 PM

-
- Regards

Joint Secretary
Urban Development & Municipal Affairs Department

 **Admn. Approval of Bidhannagar MC.pdf**
30K

Government of West Bengal
Urban Development & Municipal Affairs Department
Municipal Affairs Branch
Poura Prashasan Bhavan
DD-1, Saltlake, Kolkata-700064

B.N.Kas.
S.D.

No 897/MA/P/C-10/3S-123/2017

Dated: Kolkata, the 21st day of September, 2017

From: Joint Secretary
to the Government of West Bengal

To: The Director,
State Urban Development Agency,

Sub: Administrative Approval for procurement of equipment/vehicle for conservancy related works under Bidhannagar Municipal Corporation

Sir,

In continuation of this department's earlier Administrative Approval vide No. 493 MA/C-10/3S-40/2017 dated 30.05.2017, I am directed to convey in principle Administrative approval for the scheme as stated in above noted subject for an amount of Rs. 8,78,00,000/- under Bidhannagar Municipal Corporation, subject to strict observance of all relevant rules & regulations of the State Government issued time including e-tendering.

Necessary fund will be released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and copy of comparative statement from concerned ULB.

This letter is issued with the approval of appropriate authority of this Department

Yours faithfully,


Joint Secretary

No 897/1(1)/MA/P/C-10/3S-123/2017

Dated: Kolkata, the 21st day of September, 2017

Copy forwarded for information to:

1. Commissioner, Bidhannagar Municipal Corporation.

Joint Secretary

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector- I,
Salt Lake City, Kolkata – 700 064

PMR
16/8/17

No.766/MA/P/C-10/3S-40/2017 (Pt. I)

Dated, Kolkata, the 9th day of August, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106



AMD (SAM)
11/8/17

Sub: Administrative Approval for change in purchase of equipment for cleanliness drive by Dum Dum Municipality

Sir,

With reference to above, I am directed to inform you that this Department has no objection for purchase of the following equipments instead of 1.8 Cu.M Hooper Tipper (quantity - 10):

Sl. No	Item	Quantity	Estimated Cost (Rs.)
1.	10 Cubic Mtr. Dumper of BS-IV Model	1	2750000
2.	Battery Operated Hydraulic Dumper	12	25200000
3.	Tri-cycle van(Galv. Sheet Body-conventional Type)	12	228000
Total			5498000

Necessary fund will be released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/ procurement from concerned ULBs.

This letter is issued with the approval of appropriate authority of this Department

Yours faithfully,


Joint secretary to the Government of West Bengal

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector- I,
Salt Lake City, Kolkata – 700 064

PMR
16/8/17

No.766/MA/P/C-10/3S-40/2017 (Pt. I)

Dated, Kolkata, the 9th day of August, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106



Sub: Administrative Approval for change in purchase of equipment for cleanliness drive by Dum Dum Municipality

Sir,

With reference to above, I am directed to inform you that this Department has no objection for purchase of the following equipments instead of 1.8 Cu.M Hooper Tipper (quantity - 10):

Sl. No	Item	Quantity	Estimated Cost (Rs.)
1.	10 Cubic Mtr. Dumper of BS-IV Model	1	2750000
2.	Battery Operated Hydraulic Dumper	12	25200000
3.	Tri-cycle van(Galv. Sheet Body-conventional Type)	12	228000
Total			5498000

Necessary fund will be released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/ procurement from concerned ULBs.

This letter is issued with the approval of appropriate authority of this Department

Yours faithfully,


Joint secretary to the Government of West Bengal



রাজ্য নগর উন্নয়ন সংস্থা

SUDA

STATE URBAN DEVELOPMENT AGENCY

"ইলগাস ভবন", এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ

"ILGUS BHAVAN", H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA- ১০/২০১৬(৪-III) / ১৩৭

তারিখ ০১.০৮.২০১৭

From: Finance Officer, SUDA

To: Chairperson/Executive Officer/Chief Engineer.... Municipality/KMDA/MED

MEMORANDUM

Sub: Release of fund to KMDA/MED/ULBs for initiating the SWM Projects under Mission Nirmal Bangla under SBM (U)

Madam/Sir,

It may kindly be recalled that the Solid Waste Management Projects have been approved by the State High Powered Committee of Mission Nirmal Bangal (Urban). 10% of the total Project cost of each project are being released to KMDA/MED/ULBs as per order vide no: - 710/MA/C-10/1G-18/2017 dated 26.07.2017.

The detail of fund release is enclosed.

Yours faithfully,

Enclo: As stated

Finance Officer, SUDA.

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

Sl. No	Name of the Payee	Amt. In Rs.	For the Project of	Name of the Bank	Branch Name	Account No.	IFS Code
1	Santipur Municipality	18,200,000.00	Standalone SWM Project	United Bank of India	Santipur	0217010496957	UTBI0SAN222
2	Jalpaiguri Municipality	12,900,000.00	Standalone SWM Project	Axis Bank Ltd.	Jalpaiguri	916010005100650	UTIB0000442
3	Nabadwip Municipality	15,000,000.00	Standalone SWM Project	Oriental Bank of Commerce	Nabadwip	17702191013080	ORBC0101770
4	Krishnagar Municipality	18,300,000.00	Standalone SWM Project	Punjab National Bank	Krishnanagar	3204000100097417	PUNB0320400
5	Asansol Municipal Corporation	34,400,000.00	Standalone SWM Project	Axis Bank Ltd.	Asansol	916010002415919	UTIB0000150
6	Kolkata Municipal Corporation	152,800,000.00	Standalone SWM Project	Union Bank of India	Dharmatalla	301301010013093	UBIN0530131
7	Kolkata Metropolitan Development Authority	137,700,000.00	Cluster SWM Project of Dum Dum, North Dum Dum, South Dum Dum & Baranagar Municipality and Standalone SWM Project of Bhatpara and Naihati Municipality.	ICICI Bank Ltd.	Bidhannagar	695005600232	ICIC0006950

Sl. No	Name of the Payee	Amt. In Rs.	For the Project of	Payment Details
1	"Executive Engineer, North 24 Parganas Division, Municipal Engineering Directorate"	32,300,000.00	Cluster SWM Project of Ashokenagar Kalyangarh & Habra Municipality.	An account payee cheque bearing no. 000083 Dated 31.07.2017, Drawn on Axis Bank Of India, Salt Lake, Sector-II Branch.

Red

Government of West Bengal
Department of Urban Development & Municipal Affairs
Pura Prashasan Bhavan, DD-I, Sector-I,
Salt Lake City, Kolkata - 700 064

B.W. K. Das
SO
PMB
27/7/17

No. 710 /MA/P/C-10/1G-18/2017

Dated, Kolkata, the 26th day of July, 2017.

From: Joint Secretary to the Government of West Bengal

To: The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

4100
27/7/17
C.K.

Sub. Administrative Approval for Implementation of Integrated Solid Waste Management Projects under different ULBs of West Bengal - Release of Fund regarding

Sir,

In continuation of this Department's earlier letter No. 297/MA/P/C-10/1G-1/2015 Pt. dated 05.04.2017 and no. 522/MA/P/C-10/1G-1/2015 Pt. II dated 07.06 2017 wherein Administrative Approval for 9 (nine) Integrated Solid waste Management Projects under different ULBs and 1 (one) Integrated Solid waste Management Project under Kolkata Municipal Corporation had been accorded I am directed to state that necessary fund will be released by Director, SUDA in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender procurement from ULBs as per Statement enclosed herewith.

This letter is issued with the approval of appropriate authority of this Department

Encl. As stated

Yours faithfully,

Joint Secretary to the Government of West Bengal

-03-

STATEMENT

E. Closure of No.710/MAVP/C-10/1G-18/2017I

Dated, Kolkata, the 26th day of July, 2017

Name of the Project including ULB	Total Estimated Cost (Rs. in lakh)	Total Central Share (Rs. in lakh)	Total State Share (Rs. in lakh)	Total ULB Share (Rs. in lakh)	Fund to be released to
Integrated Solid Waste Management Project (Phase - I) within Dum Dum, North Dum Dum, South Dum Dum & Baranagar Municipality	5573.00	1950.66	3343.68	278.66	Chief Engineer, PMC Sector, KMDA
Integrated Solid Waste Management Project within Naihati Municipality	4021.00	1407.14	2412.23	201.63	Chief Engineer, PMC Sector, KMDA
Integrated Solid Waste Management Project Within Bhatpara Municipality	4182.0	1463.61	2509.06	209.33	Chief Engineer, PMC Sector, KMDA
Integrated Solid Waste Management Project within Santipur Municipality	1819.14	636.699	1019.484	90.957	ULB
Integrated Solid Waste Management Project within Jalpaiguri Municipality	1288.15	450.85	772.89	64.41	ULB
Integrated Solid Waste Management Project in Nabadwip Municipality	1498.44	524.45	899.06	74.93	ULB
Integrated Solid Waste Management Project within Krishnagar Municipality	1833.81	641.83	1100.29	91.69	ULB
Integrated Solid Waste Management Project in Ashokenagar-Kalyangarh & Habra Municipality	3232.20	1131.27	1939.32	161.61	Chief Engineer, M.E.Dte.
Integrated Solid Waste Management Project within Asansol Municipal Corporation	3440.00	1179.00			ULB
Integrated Solid Waste Management Project for Kolkata Municipal Corporation	15283.00	5349.00	8406.00	1528.00	KMC

K.M.DA

Joint Secretary

-5-

The release of fund is also subject to the following conditions:

- 1) The fund should be utilized only for the purpose for which it is released and for no other purpose.
- 2) Works for the released amount should be executed strictly as per scheme Guidelines.
- 3) Monthly report of Physical and Financial progress should be sent to SUDA and MED by the 7th of the following month.
- 4) The amount released herein should be kept in the dedicated Bank Account for SBM maintained by the ULBs.
- 5) A subsidiary Cash Book should be maintained for keeping accounts (deposits and withdrawals) of funds.
- 6) Money receipt in Form 42 may be sent immediately after receipt of the online transfer.
- 7) Appropriate amounts should be sub allotted to the concerned ULBs.




Finance Officer, SUDA.

SUDA-50/2016 (pt-III) / 50/2016 (pt III) / 539/1(4)

03.08.2017

Copy Forwarded for kind information of:

1. Secretary, UD & MA Dept, Govt. of West Bengal.
2. Sri B.N.KAR, Addl. Dir. SBM and Addl. Dir. ILGUS.
3. Addl Director, SUDA.
4. Cashier, SUDA.



Finance Officer, SUDA.

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector- I,
Salt Lake City, Kolkata – 700 064

No. 710 /MA/P/C-10/1G-18/2017

Dated, Kolkata, the 26th day of July, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

Sub: Administrative Approval for Implementation of Integrated Solid Waste Management Projects under different ULBs of West Bengal – Release of Fund regarding

Sir,

In continuation of this Department's earlier letter No. 297/MA/P/C-10/1G-1/2015 Pt. dated 05.04.2017 and no. 522/MA/P/C-10/1G-1/2015 Pt. II dated 07.06.2017 wherein Administrative Approval for 9 (nine) Integrated Solid waste Management Projects under different ULBs and 1 (one) Integrated Solid waste Management Project under Kolkata Municipal Corporation had been accorded I am directed to state that necessary fund will be released by Director, SUDA in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender procurement from ULBs as per Statement enclosed herewith.

This letter is issued with the approval of appropriate authority of this Department

Encl. As stated

Yours faithfully,

[Signature]
Joint Secretary to the Government of West Bengal

STATEMENT

Enclosure of No.710 /MA/P/C-10/1G-18/2017

Dated, Kolkata, the 26th day of July, 2017

Name of the Project including ULB	Total Estimated Cost (Rs. In lakh)	Total Central Share (Rs. In lakh)	Total State Share (Rs. In lakh)	Total ULB Share (Rs. In lakh)	Fund to be released to
Integrated Solid Waste Management Project (Phase – I) within Dum Dum, North Dum Dum, South Dum Dum & Baranagar Municipality	5573.00	1950.66	3343.68	278.66	Chief Engineer, PMC Sector, KMDA
Integrated Solid Waste Management Project within Naihati Municipality	4021.00	1407.14	2412.23	201.63	Chief Engineer, PMC Sector, KMDA
Integrated Solid Waste Management Project Within Bhatpara Municipality	4182.0	1463.61	2509.06	209.33	Chief Engineer, PMC Sector, KMDA
Integrated Solid Waste Management Project within Santipur Municipality	1819.14	636.699	1019.484	90.957	ULB
Integrated Solid Waste Management Project within Jalpaiguri Municipality	1288.15	450.85	772.89	64.41	ULB
Integrated Solid Waste Management Project in Nabadwip Municipality	1498.44	524.45	899.06	74.93	ULB
Integrated Solid Waste Management Project within Krishnagar Municipality	1833.81	641.83	1100.29	91.69	ULB
Integrated Solid Waste Management Project in Ashokenagar-Kalyangarh & Habra Municipality	3232.20	1131.27	1939.32	161.61	Chief Engineer, M.E.Dte.
Integrated Solid Waste Management Project within Asansol Municipal Corporation	3440.00	1179.00	-	-	ULB
Integrated Solid Waste Management Project for Kolkata Municipal Corporation	15283.00	5349.00	8406.00	1528.00	KMC

[Signature]
Joint Secretary

FORM GFR-19A

(See Government of India's Decision (1) below Rule 212)

FORM OF UTILISATION CERTIFICATE

Sl. No.	Letter No. and date	Amount (Rs. in Lakh)
01.	126(Sanction)/MA/P/C-10/ 1G-1/2015 dated 05.08.2015	6401.00000
02.	385(Sanction)/MA/P/C-10/ 1G-7/2014 dated 17.02.2016	5352.00000
T o t a l		11753.00000

Certified that after considering opening balance of Rs.Nil only as on 01.04.2015 and grants-in-aid sanctioned during the year 2015-16 amounting to Rs.117,53,00,000/- (Rupees One Hundred Seventeen Crore Fifty Three Lakh) only towards Implementation of Swachh Bharat Mission (SBM) under these letter nos. given in the margin, a

sum of Rs.71,31,04,837/- (Rupees Seventy One Crore Thirty One Lakh Four Thousand Eight Hundred Thirty Seven) only has been utilized for which it was sanctioned and the balance of Rs.46,21,95,163/- (Rupees Forty Six Crore Twenty One Lakh Ninety Five Thousand One Hundred Sixty Three) only remains un-utilised in the hand as on 31.03.2016.

Certified that I have satisfied myself that the conditions on which the grants-in-aid was sanctioned have been duly / are being fulfilled and that I have exercised the following check to see that the money was actually utilised for the purpose for which it was sanctioned.

Kinds of Checks exercised :

1. Cash Book & Vouchers
2. General Ledger
3. Bank Statement
4. UCs received from ULBs

Place : Kolkata

Date : 14.7.17

Signature :

Designation : State Urban Development Agency

Director

FORM GFR-19A

(See Government of India's Decision (1) below Rule 212)

FORM OF UTILISATION CERTIFICATE

Sl. No.	Letter No. and date	Amount (Rs. in Lakh)
01.	473(Sanction)/MA/P/C-10/1G-4/2017 dated 23.03.2017	2686.00000
Total		2686.00000

Certified that after considering opening balance of Rs.46,21,95,163/- (Rupees Forty Six Crore Twenty One Lakh Ninety Five Thousand One Hundred Sixty Three) only as on 01.04.2016 and grants-in-aid sanctioned during the year 2016-17 amounting to Rs.26,86,00,000/- (Rupees Twenty Six Crore Eighty Six Lakh) only towards

Implementation of Swachh Bharat Mission (SBM) under these letter nos. given in the margin, a sum of Rs.45,77,25,008/- (Rupees Forty Five Crore Seventy Seven Lakh Twenty Five Thousand Eight) only has been utilized for which it was sanctioned and the balance of Rs.27,30,70,155/- (Rupees Twenty Seven Crore Thirty Lakh Seventy Thousand One Hundred Fifty Five) only remains un-utilised in the hand as on 31.03.2017.

Certified that I have satisfied myself that the conditions on which the grants-in-aid was sanctioned have been duly / are being fulfilled and that I have exercised the following check to see that the money was actually utilised for the purpose for which it was sanctioned.

Kinds of Checks exercised :

1. Cash Book & Vouchers
2. General Ledger
3. Bank Statement
4. UCs received from ULBs

Place : Kolkata

Date : 14-7-17

Signature :

Designation :


Director

State Urban Development Agency

FORM SR-330A

of the Treasury Rules, West Bengal and the Subsidiary Rules
made thereunder, Volume-I

FORM OF UTILISATION CERTIFICATE

Sl. No.	Letter No. and date	Amount (Rs. in Lakh)
01.	127(Sanction)/MA/P/C-10/1G-1/2015 dated 05.08.2015	2131.00000
02.	359(Sanction)/MA/P/C-10/1G-7/2014 dated 27.01.2016	9266.48000
03.	276(Sanction)/MA/P/C-10/1G-1/2015 dated 30.11.2015	570.30740
04.	380(Sanction)/MA/P/C-10/1G-1/2015 dated 12.02.2016	3681.00000
05.	386(Sanction)/MA/P/C-10/1G-7/2014 dated 17.02.2016	1783.50000
T o t a l		17432.33740

Certified that after considering opening balance of Rs.Nil only as on 01.04.2015 and grants-in-aid sanctioned during the year 2015-16 amounting to Rs.174,32,33,740/- (Rupees One Hundred Seventy Four Crore Thirty Two Lakh Thirty Three Thousand Seven Hundred Forty) only towards Implementation of Swachh Bharat Mission (SBM) under these letter nos. given in the margin, a sum of Rs.29,47,32,352/- (Rupees Twenty Nine Crore Forty Seven Lakh Thirty Two

Thousand Three Hundred Fifty Two) only has been utilized for which it was sanctioned and the balance of Rs.144,85,01,388/- (Rupees One Hundred Forty Four Crore Eighty Five Lakh One Thousand Three Hundred Eighty Eight) only remains un-utilised in the hand as on 31.03.2016.

Certified that I have satisfied myself that the conditions on which the grants-in-aid was sanctioned have been duly / are being fulfilled and that I have exercised the following check to see that the money was actually utilised for the purpose for which it was sanctioned.

Kinds of Checks exercised :

1. Cash Book & Vouchers
2. General Ledger
3. Bank Statement
4. UCs received from ULBs

Place : K. K. K.

Date : 14.7.17.

Signature :


Director

Designation : State Urban Development Agency

FORM SR-330A

of the Treasury Rules, West Bengal and the Subsidiary Rules
made thereunder, Volume-I

FORM OF UTILISATION CERTIFICATE

Sl. No.	Letter No. and date	Amount (Rs. in Lakh)
01.	474(Sanction)/MA/P/C-10/1G-4/2017 dated 23.03.2017	2363.86800
02.	328(Sanction)/MA/P/C-10/1G-1/2015 dated 19.12.2016	7756.97865
Total		10120.84665

Certified that after considering opening balance of Rs.144,85,01,388/- (Rupees One Hundred Forty Four Crore Eighty Five Lakh One Thousand Three Hundred Eighty Eight) only as on 01.04.2016 and grants-in-aid sanctioned during the year 2016-17 amounting to Rs.101,20,84,665/- (Rupees One Hundred One Crore Twenty Lakh

Eighty Four Thousand Six Hundred Sixty Five) only towards Implementation of Swachh Bharat Mission (SBM) under these letter nos. given in the margin, a sum of Rs.197,26,18,591/- (Rupees One Hundred Ninety Seven Crore Twenty Six Lakh Eighteen Thousand Five Hundred Ninety One) only has been utilized for which it was sanctioned and the balance of Rs.48,79,67,462/- (Rupees Forty Eight Crore Seventy Nine Lakh Sixty Seven Thousand Four Hundred Sixty Two) only remains un-utilised in the hand as on 31.03.2017.

Certified that I have satisfied myself that the conditions on which the grants-in-aid was sanctioned have been duly / are being fulfilled and that I have exercised the following check to see that the money was actually utilised for the purpose for which it was sanctioned.

Kinds of Checks exercised :

1. Cash Book & Vouchers
2. General Ledger
3. Bank Statement
4. UCs received from ULBs

Place : Kolkata

Date : 14.7.17


Signature :



Designation : State Urban Development Agency

Status of 10 Solid Waste Management Projects of 14 ULBs under Swachh Bharat Mission/Mission Nirmal Bangla (U)

Sl No.	Name of ULB (Population)	Sl No.	Project Cost (in Rs. Crore)	Gol Share (in Rs. Crore)	State/ULB Share (in Rs. Crore)	Type of Project	Status
1	Dum Dum (114786)	1	55.73	19.51	36.22	Cluster Mode	Tender for Compost Plant through e-tendering process completed. Work Order will be issued shortly.
2	North Dum Dum (249142)						
3	South Dum Dum (403316)						
4	Baranagar (245213)	1	55.73	19.51	36.22	Cluster Mode	Tender for Topographical and part-Geo-Technical Survey of entire project through e-tender completed and work order issued and work started.
5	Ashoknagar-Kalyangarh (121592)	2	32.32	11.31	21.01	Cluster Mode	1 st & 2 nd Tender (e-tender) for Bio-Gas Plant cancelled due to single bidder and invalid participants. 3 rd Call invited, Technical Bid will be opened shortly.
6	Habra (147221)						
7	Jalpaiguri (107341)	3	12.88	4.51	8.37	Standalone Mode	1 st & 2 nd Tender (e-tender) for Bio-Gas Plant cancelled due to single bidder and invalid participants. In 3 rd Call also single bidder applied. To be placed at Technical Committee for further decision.
8	Krishnanagar (153062)	4	18.33	6.42	11.91	Standalone Mode	1 st Tender (e-tender) for Bio-Gas Plant cancelled due to single bidder. In 2 nd Call also single bidder applied. To be placed at Technical Committee for further decision.
9	Santipur (151777)	5	18.19	6.37	11.82	Standalone Mode	1 st Tender (e-tender) for Bio-Gas Plant cancelled due to single bidder. In 2 nd Call also single bidder applied.


 14/7/17

Sl No.	Name of ULB (Population)	Sl No.	Project Cost (in Rs. Crore)	Gol Share (in Rs. Crore)	State/ULB Share (in Rs. Crore)	Type of Project	Status
							To be placed at Technical Committee for further decision.
10	Nabadwip (125543)	6	14.98	5.24	9.74	Standalone Mode	1 st Tender (e-tender) for Bio-Gas Plant cancelled due to single bidder. In 2 nd Call also single bidder applied. To be placed at Technical Committee for further decision.
11	Bahatpara (383762)	7	41.82	14.64	27.18	Standalone Mode	Tender for Compost Plant and landfill; site & allied works through e-tendering process completed. Work Order will be issued shortly.
12	Naihati (217900)	8	40.21	14.07	26.14	Standalone Mode	Tender for Compost Plant and landfill; site & allied works through e-tendering process completed. Work Order will be issued shortly.
13	Kolkata MC (4496694)	9	152.83	53.49	99.34	Standalone Mode	e-tender process for purchase of Auto Tipper, portable Stationary Compactor, Hookloader and 14 cum Movable Compactors completed. Workorder to be issued shortly.
14	Asansol MC (1156387)	10	34.4	11.79	22.62	Standalone Mode	1 st tender invited for purchase of SWM vehicles and equipments but cancelled due to non eligible bidders. 2 nd tender invited.
	TOTAL		421.69	147.35	274.34		

Sd/-
14/7/17

GOVERNMENT OF WEST BENGAL
URBAN DEVELOPMENT & MUNICIPAL AFFIARS DEPARTMENT
POURA PRASHASAN BHAWAN
DD-I, SECTOR-I, SALT LAKE, KOLKATA-700064

No. 625/MA/c-10/3S-18/2016

Date, Kolkata, the 5th July, 2017

To:

1. The Chairman/Chairperson, -----Municipality/NAA
2. The Municipal Commissioner, Kolkata MC
3. The Commissioner, Howrah MC/Bidhannagar MC/Asansol MC/ Durgapur MC/ Chandernagore MC/Siliguri MC
4. The Administrator, Buniadpur Municipality

Sub: Cleaning the Drains of your City for avoiding Water Logging

Sir/Madam,

You are aware that in every Rainy Season, Water Logging in different corner of the cities is the basic problem resulting to inconvenience to the citizen and loss of health and economy.


In this connection, you are requested to take the following actions, so that no Water Logging can be observed in your city during this Rainy Season:

1. Arrange Regular Cleaning of all the Drains of your City.
2. Deploy extra Manpower, if required.
3. If there arises any blockage due to Solid Wastes then remove that immediately.
4. If any Water Logging is being observed due to heavy shower, then use sufficient number of pumps for clearing that water.
5. To set up a Control Room and Designate one Official as Nodal Officer for this, so that the State Government and citizen can contact him for necessary purposes. Inform the name and Mobile No. of Nodal Officer to this Office and also widely circulate the same to the citizen.
6. Widely Circulate one Whatsapp No. to all the Citizens for lodging the complaint to the ULB office.
7. Keep sharp monitoring on the citizen on the use of plastic

Fund of 14th Finance Commission and West Bengal Urban Employment Programme may be utilized for this purpose, if required, and all types of leaves of the Officials and Engineers attached to the Storm Water Drainage Cleaning Section of your ULB shall be cancelled for effective monitoring.

Your early action in this regard is solicited.

Yours faithfully



(Secretary)

No. 625(4)/MA/c-10/3S-18/2016

Date, Kolkata, the 5th July, 2017

Copy forwarded for kind information to:

1. The Hon'ble Mayor, Kolkata MC/Howrah MC/Bidhannagar MC/Asansol MC/Durgapur MC/ Chandernagore MC/Siliguri MC
2. The District Magistrate, All Districts
3. PS to the Hon'ble MIC, UD & MA Department, GoWB
4. Sr. PA to the Secretary, UD & MA Department, GoWB


(Secretary)

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
 “ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA-50/2016/432 (125)

তারিখ 04-07-2017

From: Director, SUDA

To:

1. The Chairman/Chairperson, -----Municipality/NAA
2. The Municipal Commissioner, Kolkata MC
3. The Commissioner, Howrah MC/Bidhannagar MC/Asansol MC/ Durgapur MC/ Chandernagore MC/Siliguri MC
4. The Administrator, Buniadpur Municipality

Sub: Cleaning the Drains of your City for avoiding Water Logging

Sir/Madam,

You are aware that in every Rainy Season, Water Logging in different corner of the cities is the basic problem resulting to harassment to the citizen and loss of health and economy.


In this connection, I am directed to request you to take the following actions, so that no Water Logging can be observed in your city during this Rainy Season:

1. Arrange Regular Cleaning of all the Drains of your City.
2. Deploy extra Manpower, if required.
3. If there arises any blockage due to Solid Wastes then remove that immediately.
4. If any Water Logging is being observed due to heavy shower, then use sufficient number of pumps for clearing that water.
5. Designate one Official as Nodal Officer for this, so that the State Government and citizen can contact him for necessary purposes. Inform the name and Mobile No. of Nodal Officer to this Office and also widely circulate the same to the citizen.
6. Widely Circulate one Whatsapp No. to all the Citizens for lodging the complaint to the ULB office.
7. Keep sharp monitoring on the citizen on the use of plastic

Fund of 14th Finance Commission and West Bengal Urban Employment Programme may be utilized for this purpose, if required.

You early action in this regard is solicited.


Yours faithfully


 (Director, SUDA)

SUDA-50/2016/432/1(3)

Copy forwarded for kind information to:

1. The Hon'ble Mayor, Kolkata MC/Howrah MC/Bidhannagar MC/Asansol MC/Durgapur MC/Chandernagore MC/Siliguri MC
2. PS to the Hon'ble MIC, UD & MA Department, GoWB
3. Sr. PA to the Secretary, UD & MA Department, GoWB


 (Director, SUDA)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

রাজ্য নগর উন্নয়ন সংস্থা
STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA-50/2016/556

তারিখ 22.06.2017

From : Director, SUDA

To : 1. Hon'ble Mayor, Asansol Municipal Corporation
2. Hon'ble Mayor, Durgapur Municipal Corporation
3. Commissioner, Asansol Municipal Corporation
4. Commissioner, Durgapur Municipal Corporation

Sub: Revised Venue of the Review Meeting on Several Urban Development Programmes

Sir,

In partial modification of the earlier letter no. SUDA-50/2016/549(2) dated 21.06.2017, this is to inform you that the Review Meeting on 23.06.2017 at 2 PM will be held in the Conference Hall, 5th Floor, NAGARAYAN, Urban Development and Municipal Affairs Department, Govt. of West Bengal, Sector-I, Block-DF-8, Bidhan Nagar, Kolkata-700064 in place of ROTANDA, Writers' Buildings.

The Commissioner, Asansol Municipal Corporation and Commissioner, Durgapur Municipal Corporation are requested to attend the meeting.

Yours faithfully,

(Director, SUDA)

No. SUDA-50/2016/556/1(3)

Copy forwarded for kind information with the request to attend the meeting to:

1. Chief Executive Officer, ADDA
2. Chief Engineer, MED
3. Concerned Superintending Engineer & Executive Engineers of Respective Divisions of MED

(Director, SUDA)

No. SUDA-50/2016/556/2(2)

Copy forwarded for kind information to:

1. PS to the Hon'ble MIC, UD & MA Department, GoWB
2. Sr. PA to the Secretary, UD & MA Department, GoWB

(Director, SUDA)

রাজ্য নগর উন্নয়ন সংস্থা
STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA-50/2016/549 (2)

তারিখ ২১.০৬.২০১৭

From : Director, SUDA

To : 1. Commissioner, Asansol Municipal Corporation
2. Commissioner, Durgapur Municipal Corporation

Sub: Review Meeting on Several Urban Development Programmes

Sir,

This is to inform you that Hon'ble MIC, UD & MA Department, Government of West Bengal desires to hold a Review Meeting on 23.06.2017 at 2 PM in ROTANDA, Writers' Buildings on the progress of the following Urban Development Programmes.

1. Atal Mission for Rejuvenation and Urban Transformation (AMRUT)
2. Mission Nirmal Bangla (Urban), Solid Waste Management and Cleanliness in Hospitals
3. Green City Mission
4. National Urban Livelihood Mission
5. Housing for All
6. Somobyathi
7. Miscellaneous

I am directed to request you to attend the meeting in the abovementioned date and venue with all the Reports and Returns positively.

Yours faithfully,


(Director, SUDA)

No. SUDA-50/2016/549/1 (5)

Copy forwarded for kind information with the request to attend the meeting to:

1. Hon'ble Mayor, Asansol Municipal Corporation
2. Hon'ble Mayor, Durgapur Municipal Corporation
3. Chief Executive Officer, ADDA
4. Chief Engineer, MED
5. Concerned Superintending Engineer & Executive Engineers of Respective Divisions of MED


(Director, SUDA)

No. SUDA/50/2016/549/2 (2)

Copy forwarded for kind information with the request to attend the meeting to:

1. PS to the Hon'ble MIC, UD & MA Department, GoWB
2. Sr. PA to the Secretary, UD & MA Department, GoWB


(Director, SUDA)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

সুডা

SUDA

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ

“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA- 50/2016 / 281

তারিখ 19-05-2017

From: Additional Director, ILGUS
& Additional State Mission Director, MNB(U)

To : The Chief Engineer
Solid Waste Management
Kolkata Metropolitan Development Authority
Salt Lake, Kolkata

Sub: Designating one competent Officer for appearing before the Hon'ble NGT on 19.05.2017 with relevant records and steps & measures so far taken to mitigate serious pollution prevailing in the concerned area of Rajivnagar/ Adarshanagar/ Promodhnagar

Sir,

This is to inform you that the Hon'ble Green Tribunal in the order dated 20.04.2017 directed the UD & MA Department to designate one competent Officer (well versed in technicality) for appearing before the Hon'ble NGT on 19.05.2017 with relevant records and steps & measures so far taken to mitigate serious pollution prevailing in the concerned area of Rajivnagar/ Adarshanagar/ Promodhnagar.

In this connection, I am directed to request you to designate one Officer (well versed in technicality) from your Office to appear before the Hon'ble NGT on 19.05.2017.

You are further requested to direct the concerned Officer to contact with Sri Santanu Das, Joint Secretary and Sri Sukdev Das, Senior Law Officer of UD & MA Department for necessary details.

Yours faithfully

Additional Director, ILGUS &
Addl. State Mission Director, MNB(U)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

সুডা

o/e

SUDA

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ

“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA- 50/2016/281

তারিখ 12-05-2017

From: Additional Director, ILGUS
& Additional State Mission Director, MNB(U)

To : The Chief Engineer
Solid Waste Management
Kolkata Metropolitan Development Authority
Salt Lake, Kolkata

Sub: Designating one competent Officer for appearing before the Hon'ble NGT on 19.05.2017 with relevant records and steps & measures so far taken to mitigate serious pollution prevailing in the concerned area of Rajivnagar/ Adarshanagar/ Promodhnagar

Sir,

This is to inform you that the Hon'ble Green Tribunal in the order dated 20.04.2017 directed the UD & MA Department to designate one competent Officer (well versed in technicality) for appearing before the Hon'ble NGT on 19.05.2017 with relevant records and steps & measures so far taken to mitigate serious pollution prevailing in the concerned area of Rajivnagar/ Adarshanagar/ Promodhnagar.

In this connection, I am directed to request you to designate one Officer (well versed in technicality) from your Office to appear before the Hon'ble NGT on 19.05.2017.

You are further requested to direct the concerned Officer to contact with Sri Santanu Das, Joint Secretary and Sri Sukdev Das, Senior Law Officer of UD & MA Department for necessary details.

Yours faithfully

Additional Director, ILGUS &
Addl. State Mission Director, MNB(U)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector-I,
Salt Lake City, Kolkata – 700 064

No.344 / MA/P/C-10/1G-1/2015 (Pt. X)

Dated, Kolkata, the 18th day of April, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director
State Urban Development Agency
ILGUS Bhavan, Block HC
Sector III, Salt Lake, Kolkata 700 106

Sub: Submission of Documents for availing Loan assistance from HUDCO for Solid Waste Management Scheme at Asansol (Ph- I)


Ref: No.KRO-Sch/SWM-Asansol/43 dated 07.04.2017 Jt. General Manager (Project), HUDCO

Sir,

In inviting a reference to above, I am directed to forward herewith a copy of letter No. KRO-Sch/SWM-Asansol/43 dated 07.04.2017 of Jt. General Manager (Project), HUDCO and to request you to take necessary action in respect of availing 'Loan assistance from HUDCO for Solid Waste Management Scheme at Asansol (Ph- I)'.
o/c

I am further directed to state the concurrence of in principal administrative approval has been obtained from Finance Department (Gr. 'N') vide U.O. No. 3926 dated 23..2017 and the same as been communicated to you through this Department's letter No.297/MA/C-10/1G-1/201 Pt. dated 5.04.2017.

Yours faithfully,



Joint secretary to the Government of West Bengal

No.344/1/ MA/P/C-10/1G-1/2015 (Pt. X)

Dated, Kolkata, the 18th day of April, 2017

Copy forwarded for information to

Sri Debesh Chakraborty Jt.General Manager (Project), HUDCO, 'HUDCO Bhavan, Plot No.11, Block DJSector -II, Karunamoyee, Salt Lake, Kolkata 700 091 - with reference to his letter No. .KRO-Sch/SWM-Asansol/43 dated 07.04.2017


Joint Secretary

हाउसिंग एण्ड अर्बन डेवलपमेंट कॉर्पोरेशन लिमिटेड

(भारत सरकार का उपक्रम)

कोलकाता क्षेत्रीय कार्यालय

"हडको भवन", प्लॉट सं. 11, ब्लॉक - डी.जे. सेक्टर-II, करुणामयी, साल्ट लेक, कोलकाता - 700 091
दूरभाष : (033) 2358 6141, 2358 0773, 2358 0778, फैक्स : (033) 2358 5514, ईमेल : hudcokro@gmail.com

Housing and Urban Development Corporation Limited

(A Govt. of India Enterprise)

Kolkata Regional Office

"HUDCO Bhawan", Plot No.11, Block-DJ, Sector-II, Karunamoyee, Salt Lake, Kolkata - 700 091

Tel. : (033) 2358 6141, 2358 0773, 2358 0778, Fax : (033) 2358 5514, e-mail: hudcokro@gmail.com

No: KRO-Sch/SWM-Asansol/43

Date: 07.04.2017

The Hon'ble Mayor,
Asansol Municipal Corporation,
Station Road, Asansol-713301
Burdwan, West Bengal

Sub.: Proposal for availing HUDCO Loan assistance for Solid Waste Management Scheme at Asansol(Ph-I)

Ref.: Sanction Letter No. 262 dated 08/12/2016.

Sir,

This is to inform you that above scheme was sanctioned by HUDCO with Loan Assistance of Rs.21.90 crores under Viability Gap Funding which was conveyed vide HUDCO Sanction Letter No.262 dt.08.12.2016. The scheme with Project Cost of Rs.34.40 crores will be funded by Govt. of India under Swatchch Bharat Mission and MPLAD apart from HUDCO Loan Assistance. It is to mention that the aforesaid scheme was formulated with the support of the Govt. of West Bengal and as per the discussion in the meeting of the Hon'ble Minister of Urban Development and Municipal Affairs, Govt. of West Bengal and Hon'ble Minister of State, Ministry of HUPA, Govt. of India at Kolkata on 15.07.2016.

In terms of the HUDCO Sanction Letter under reference the documentation of the scheme is required to be completed by the borrowing agency within a period of 4 months. In case there is delay in completion of documentation within the above stipulated period, request for extension of validity of the scheme is required to be furnished by the borrowing agency. The documentation essentially includes furnishing of the required security which is Government Guarantee and Budgetary Provision of the State Government for Loan Repayment and compliance of various Sanction Conditions as indicated in the HUDCO Sanction Letter dt 08.12.2016 (Copy of which is enclosed). HUDCO officials had interacted with the AMC officials to expedite documentation of the Scheme.

In view of above, it is requested to your goodself to kindly arrange to complete documentation of the scheme with furnishing of the required security, compliance of terms and conditions of HUDCO Sanction Letter and execution of Loan Agreement to enable HUDCO to release loan instalment under the scheme, furnish request for



आई एस ओ 9001:2008 प्रमाणित कम्पनी

AN ISO 9001:2008 CERTIFIED COMPANY CIN: U74899DL1970GOI005276

पंजीकृत कार्यालय : कोर -7'ए', हडको, हडको भवन, इंडिया हैबिटेट सेन्टर, लोधी रोड, नई दिल्ली - 110003

दूरभाष : 011-2464 9610-23, फैक्स : 011-2462 5308, ईमेल : hudco@hudco.org, Visit us at : www.hudco.org

Regd. Office : Core -7'A', HUDCO, HUDCO Bhawan, India Habitat Centre, Lodhi Road, New Delhi - 110 003

Tel : (EPABX) 011-2464 9610-23, Fax: 011-2462 5308, e-mail: hudco@hudco.org; Visit us at : www.hudco.org

Suman
Meena

20170413170217 (see)

148

DEPARTMENT OF URBAN DEVELOPMENT
AND MUNICIPAL AFFAIRS
GOVT. OF W.B.
DT. 13-04-2017
DIARY NO. 1882

J.S.Ghosh
Director
UD&MA

Pl. put up in file related to snr Atanant approval by FD.

extension of validity of scheme as mentioned above and acceptance of the HUDCO loan Sanction letter dt.08.12.2016.

Thanking you,

Yours faithfully,

(Debesh Chakraborty)
Jt.General Manager(Project)

Copy to :- Shri Omkar Singh Meena, IAS, Secretary, Urban Development and Municipal Affairs Deptt., Govt. of West Bengal, "NAGARAYAN", Block - DF - 8, Sector - I, Behind Bikash Bhawan, Salt Lake, Kolkata - 700064.

Deb.
(Debesh Chakraborty)
Jt.General Manager(Project)

No. 1982-35654
dt. 17/4/17

Government of West Bengal
Urban Development Department
Town & Country Planning Branch
"NAGARAYAN"

DF-8, Sector-I, Bidhannagar, Kolkata -- 700 064

Despatched on.....

Despatcher

No. 1718-TCP/C-2/3A-17/2016

Dated, Kolkata, 05-10-2016.
August, 2016.

ORDER


The undersigned is directed to inform that the formulation of 'Green City Mission' as per the approval in the second meeting of Standing Committee of the Cabinet on Industry, Infrastructure & Employment, communicated vide Memo No. 2(8)-Cab.Sub.Com.(I.&E)/(Pro.)-07/2016 dated 18th July, 2016, the Governor is pleased to constitute a High Power Steering Committee on Green City Mission which will comprise the following members -

- | | |
|--|---------------|
| 1. Chief Secretary | - Chairperson |
| 2. ACS, Home Department | - Member |
| 3. ACS/Principal Secretary, Department of Urban Development | - Member |
| 4. ACS/Principal Secretary, Department of Municipal Affairs | - Member |
| 5. ACS/Principal Secretary, Department of Power & NES | - Member |
| 6. ACS/Principal Secretary, Department of Forest | - Member |
| 7. ACS/Principal Secretary, Department of Transport | - Member |
| 8. ACS/Principal Secretary, Department of IT | - Member |
| 9. ACS/Principal Secretary, Department of Finance | - Member |
| 10. Mission Director (Green Cities) /Joint Secretary,
Department of Urban Development | - Convenor |

The Urban Development Department would be the Nodal Department. The terms of reference will be as follows :

- [a] Approval of Guidelines;
- [b] Prioritization of Projects
- [c] Approval of Projects
- [d] Review and Monitoring
- [e] Any other associated issues

By order of the Governor


Joint Secretary 5.10.16.
to the Govt. of West Bengal
Dated, Kolkata, August, 2016

No. -TCP/C-2/3A-17/2016

Copy forwarded for information to :

1. Chief Secretary, Govt. of West Bengal;
2. ACS, Home Department
3. ACS/Principal Secretary, Department of Urban Development
4. ACS/Principal Secretary, Department of Municipal Affairs
5. ACS/Principal Secretary, Department of Power & NES
6. ACS/Principal Secretary, Department of Forest
7. ACS/Principal Secretary, Department of Transport
8. ACS/Principal Secretary, Department of IT
9. ACS/Principal Secretary, Department of Finance


Joint Secretary 5.10.16.
to the Govt. of West Bengal

182

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector-I,
Salt Lake City, Kolkata – 700 064

No.297 /MA/C-10/1G-1/2015 Pt.

Dated, Kolkata, the 5th day of April, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

Sub: Administrative Approval for Implementation of Integrated Solid Waste Management Project

Sir,

With reference to above, I am directed to inform you that in principal Administrative approval for the schemes as stated in Annexure – I are hereby accorded to take necessary steps for Implementation of Integrated Solid Waste Management Project in different ULBs; subject to strict observance of all relevant rules & regulations of the State Government issued time to time including e-tendering.

Necessary fund will released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/-procurement from concerned ULBs.

This letter is issued with the approval of appropriate authority of this Department

Encl. As stated

Yours faithfully,


Joint secretary to the Government of West Bengal

etc

Name of the Project including ULB	U.O. No. & Date of F.D. (GrN')	Total Estimated Cost (Rs. In lakh)	Central Share (Rs. In lakh)	State Share (Rs. In lakh)	ULB Share (Rs. In lakh)
Integrated Solid Waste Management Project (Phase - I) within Dum Dum, North Dum Dum, South Dum Dum & Baranagar Municipality	3435 03.03.2017	5573.00	1950.66	3343.68	278.66
Integrated Solid Waste Management Project within Naihati Municipality	3395 01.03.2017	4021.00	1407.14	2412.23	201.63
Integrated Solid Waste Management Project Within Bhatpara Municipality	3472 07/03/2017	4182.0	1463.61	2509.a06	209.33
Integrated Solid Waste Management Project within Santipur Municipality	3925 23.03.2017	1819.14	636.699	1019.484	90.957
Integrated Solid Waste Management Project within Jalpaiguri Municipality	3927 23.03.2017	1288.15	450.85	772.89	64.41
Integrated Solid Waste Management Project in Nabadwip Municipality	3920 23.03.2017	1498.44	524.45	899.06	74.93
Integrated Solid Waste Management Project within Krishnagar Municipality	4011 27.03.2017	1833.81	641.83	1100.29	91.69
Integrated Solid Waste Management Project in Ashokenagar-Kalyangarh & Habra Municipality	3693 16.03.2017	3232.20	1131.27	1939.32	161.61
Integrated Solid Waste Management Project within Asansol Municipal Corporation	3926 23.03.2017	3440.00	1179.00	-	-



Govt. of West Bengal
Department of Urban Development & Municipal Affairs
(Municipal Affairs Branch)
Poura Prashasan Bhawan
DD-1, Sector-1 Salt Lake, Kolkata-64

NO: 301/MA/C-10/1G-1/2015 Dated Kolkata the 6th day of April, 2017.

From: Joint Secretary to the Government of West Bengal.

To:
The Chairman,
Murshidabad Municipality

Ref:- Memo No. 372/M.M dated-24/03/2017.

With reference to your proposal for providing for 4(Four) Nos. Tractor 275 DI & 52 HP capacity, 04(Four) Nos. Tractor HP 15, and 4 Nos. Small compactor, and 1225 Nos. Use me PVC Bin a detailed vetted estimate is required before releasing of fund from this end.

This matter may be treated as urgent.


Joint Secretary.

NO: 301/1(2)/MA/C-10/1G-1/2015 Dated Kolkata the 6th day of April, 2017.

Copy to:

1. Additional District Magistrate, Murshidabad.(Municipal Affairs).
2. Director , State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector, III, Salt Lake, Kolkata-700 106.


Joint Secretary.

182

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector- I,
Salt Lake City, Kolkata – 700 064

No.297 /MA/C-10/1G-1/2015 Pt.

Dated, Kolkata, the 5th day of April, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

Sub: Administrative Approval for Implementation of Integrated Solid Waste Management Project

Sir,

With reference to above, I am directed to inform you that in principal Administrative approval for the schemes as stated in Annexure – I are hereby accorded to take necessary steps for Implementation of Integrated Solid Waste Management Project in different ULBs; subject to strict observance of all relevant rules & regulations of the State Government issued time to time including e-tendering.

Necessary fund will released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/-procurement from concerned ULBs.

This letter is issued with the approval of appropriate authority of this Department

Enclo. As stated

Yours faithfully,


Joint secretary to the Government of West Bengal

alc

Name of the Project including ULB	U.O. No. & Date of F.D. (Gr'N')	Total Estimated Cost (Rs. In lakh)	Central Share (Rs. In lakh)	State Share (Rs. In lakh)	ULB Share (Rs. In lakh)
Integrated Solid Waste Management Project (Phase - I) within Dum Dum, North Dum Dum, South Dum Dum & Baranagar Municipality	3435 03.03.2017	5573.00	1950.66	3343.68	278.66
Integrated Solid Waste Management Project within Naihati Municipality	3395 01.03.2017	4021.00	1407.14	2412.23	201.63
Integrated Solid Waste Management Project Within Bhatpara Municipality	3472 07/03/2017	4182.0	1463.61	2509.a06	209.33
Integrated Solid Waste Management Project within Santipur Municipality	3925 23.03.2017	1819.14	636.699	1019.484	90.957
Integrated Solid Waste Management Project within Jalpaiguri Municipality	3927 23.03.2017	1288.15	450.85	772.89	64.41
Integrated Solid Waste Management Project in Nabadwip Municipality	3920 23.03.2017	1498.44	524.45	899.06	74.93
Integrated Solid Waste Management Project within Krishnagar Municipality	4011 27.03.2017	1833.81	641.83	1100.29	91.69
Integrated Solid Waste Management Project in Ashokenagar-Kalyangarh & Habra Municipality	3693 16.03.2017	3232.20	1131.27	1939.32	161.61
Integrated Solid Waste Management Project within Asansol Municipal Corporation	3926 23.03.2017	3440.00	1179.00	-	-

182

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector- I,
Salt Lake City, Kolkata – 700 064

No.297 /MA/C-10/1G-1/2015 Pt.

Dated, Kolkata, the 5th day of April, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

Sub: Administrative Approval for Implementation of Integrated Solid Waste Management Project

Sir,

With reference to above, I am directed to inform you that in principal Administrative approval for the schemes as stated in Annexure – I are hereby accorded to take necessary steps for Implementation of Integrated Solid Waste Management Project in different ULBs; subject to strict observance of all relevant rules & regulations of the State Government issued time to time including e-tendering.

Necessary fund will released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/-procurement from concerned ULBs.

This letter is issued with the approval of appropriate authority of this Department

Encl. As stated

Yours faithfully,


Joint secretary to the Government of West Bengal

etc

Name of the Project including ULB	U.O. No. & Date of F.D. (Gr'N')	Total Estimated Cost (Rs. In lakh)	Central Share (Rs. In lakh)	State Share (Rs. In lakh)	ULB Share (Rs. In lakh)
Integrated Solid Waste Management Project (Phase - I) within Dum Dum, North Dum Dum, South Dum Dum & Baranagar Municipality	3435 03.03.2017	5573.00	1950.66	3343.68	278.66
Integrated Solid Waste Management Project within Naihati Municipality	3395 01.03.2017	4021.00	1407.14	2412.23	201.63
Integrated Solid Waste Management Project Within Bhatpara Municipality	3472 07/03/2017	4182.0	1463.61	2509.a06	209.33
Integrated Solid Waste Management Project within Santipur Municipality	3925 23.03.2017	1819.14	636.699	1019.484	90.957
Integrated Solid Waste Management Project within Jalpaiguri Municipality	3927 23.03.2017	1288.15	450.85	772.89	64.41
Integrated Solid Waste Management Project in Nabadwip Municipality	3920 23.03.2017	1498.44	524.45	899.06	74.93
Integrated Solid Waste Management Project within Krishnagar Municipality	4011 27.03.2017	1833.81	641.83	1100.29	91.69
Integrated Solid Waste Management Project in Ashokenagar-Kalyangarh & Habra Municipality	3693 16.03.2017	3232.20	1131.27	1939.32	161.61
Integrated Solid Waste Management Project within Asansol Municipal Corporation	3926 23.03.2017	3440.00	1179.00	-	-

182

Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector-I,
Salt Lake City, Kolkata – 700 064

No.297 /MA/C-10/1G-1/2015 Pt.

Dated, Kolkata, the 5th day of April, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

Sub: Administrative Approval for Implementation of Integrated Solid Waste Management Project

Sir,

With reference to above, I am directed to inform you that in principal Administrative approval for the schemes as stated in Annexure – I are hereby accorded to take necessary steps for Implementation of Integrated Solid Waste Management Project in different ULBs; subject to strict observance of all relevant rules & regulations of the State Government issued time to time including e-tendering.

Necessary fund will released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/-procurement from concerned ULBs.

This letter is issued with the approval of appropriate authority of this Department

Encl. As stated

Yours faithfully,


Joint secretary to the Government of West Bengal

o/c

Name of the Project including ULB	U.O. No. & Date of F.D. (Gr'N')	Total Estimated Cost (Rs. In lakh)	Central Share (Rs. In lakh)	State Share (Rs. In lakh)	ULB Share (Rs. In lakh)
Integrated Solid Waste Management Project (Phase - I) within Dum Dum, North Dum Dum, South Dum Dum & Baranagar Municipality	3435 03.03.2017	5573.00	1950.66	3343.68	278.66
Integrated Solid Waste Management Project within Naihati Municipality	3395 01.03.2017	4021.00	1407.14	2412.23	201.63
Integrated Solid Waste Management Project Within Bhatpara Municipality	3472 07/03/2017	4182.0	1463.61	2509.a06	209.33
Integrated Solid Waste Management Project within Santipur Municipality	3925 23.03.2017	1819.14	636.699	1019.484	90.957
Integrated Solid Waste Management Project within Jalpaiguri Municipality	3927 23.03.2017	1288.15	450.85	772.89	64.41
Integrated Solid Waste Management Project in Nabadwip Municipality	3920 23.03.2017	1498.44	524.45	899.06	74.93
Integrated Solid Waste Management Project within Krishnagar Municipality	4011 27.03.2017	1833.81	641.83	1100.29	91.69
Integrated Solid Waste Management Project in Ashokenagar-Kalyangarh & Habra Municipality	3693 16.03.2017	3232.20	1131.27	1939.32	161.61
Integrated Solid Waste Management Project within Asansol Municipal Corporation	3926 23.03.2017	3440.00	1179.00	-	-



Government of West Bengal
Department of Urban Development & Municipal Affairs
Poura Prashasan Bhavan, DD-I, Sector- I,
Salt Lake City, Kolkata – 700 064

No.297 /MA/C-10/1G-1/2015 Pt.

Dated, Kolkata, the 5th day of April, 2017

From : Joint Secretary to the Government of West Bengal

To : The Director,
State Urban Development Agency,
ILGUS Bhavan, Block HA, Sector III, Salt Lake
Kolkata 700 106

Sub: Administrative Approval for Implementation of Integrated Solid Waste Management Project

Sir,

With reference to above, I am directed to inform you that in principal Administrative approval for the schemes as stated in Annexure – I are hereby accorded to take necessary steps for Implementation of Integrated Solid Waste Management Project in different ULBs; subject to strict observance of all relevant rules & regulations of the State Government issued time to time including e-tendering.

Necessary fund will released in due course as per availability of fund upon receipt of the copy of the e-tender notice, work order and certificate regarding e-tender/-procurement from concerned ULBs.

This letter is issued with the approval of appropriate authority of this Department


Encl. As stated

Yours faithfully,


Joint secretary to the Government of West Bengal

Name of the Project including ULB	U.O. No. & Date of F.D. (Gr'N')	Total Estimated Cost (Rs. In lakh)	Central Share (Rs. In lakh)	State Share (Rs. In lakh)	ULB Share (Rs. In lakh)
Integrated Solid Waste Management Project (Phase – I) within Dum Dum, North Dum Dum, South Dum Dum & Baranagar Municipality	3435 03.03.2017	5573.00	1950.66	3343.68	278.66
Integrated Solid Waste Management Project within Naihati Municipality	3395 01.03.2017	4021.00	1407.14	2412.23	201.63
Integrated Solid Waste Management Project Within Bhatpara Municipality	3472 07/03/2017	4182.0	1463.61	2509.a06	209.33
Integrated Solid Waste Management Project within Santipur Municipality	3925 23.03.2017	1819.14	636.699	1019.484	90.957
Integrated Solid Waste Management Project within Jalpaiguri Municipality	3927 23.03.2017	1288.15	450.85	772.89	64.41
Integrated Solid Waste Management Project in Nabadwip Municipality	3920 23.03.2017	1498.44	524.45	899.06	74.93
Integrated Solid Waste Management Project within Krishnagar Municipality	4011 27.03.2017	1833.81	641.83	1100.29	91.69
Integrated Solid Waste Management Project in Ashokenagar-Kalyangarh & Habra Municipality	3693 16.03.2017	3232.20	1131.27	1939.32	161.61
Integrated Solid Waste Management Project within Asansol Municipal Corporation	3926 23.03.2017	3440.00	1179.00	-	-

Sanyal
5/4/17
Joint Secretary



Office of the Municipal Councillors of Bankura

From: *Mahaprasad Sengupta*

CHAIRMAN, BANKURA MUNICIPALITY

Office: 250367, 250344, 254804

Fax: 03242-259269/250367

Resi: 03242-253338 Mobile: 9434115191

E-mail: senguptamahaprasadcm@yahoo.in

:bankuramunicipality@rediffmail.com

Website: www.bankuramunicipality.org

Memo NO: 4641 / B.M. / 16-17

Dated: 31.03.2017

To,
The Director, SUDA
ILGUS Bhaban
HC Block, Sector-III
Bidhannagar
Kolkata-700006

SUB: Information of Land regarding

Sir,

The following information of land available with this office for Solid Waste Management Project is given bellow for your kind perusal.

1. Area of Land (in Acre or katha): 16.53 Acre.

2. Plot No : 105

& J.L No : 051

3. Khatian No : 763

4. Address with location : Keshra Trenching Ground (vill-Keshra, Ps-Bankura)

5. Ownership of Land : Bankura Municipality

6. How the ULB got the possession of land: On purchase or vested land from Government or any other way- Other way.

Thanking you,

Yours Faithfully

M. Sengupta
31.03.17
Chairman
Bankura Municipality

Encl:
Copy of land details.

DU
Chairman
Bankura Municipality

**DIRECTORATE OF LAND RECORDS AND SURVEYS,
WEST BENGAL**

ভূমি লেখ্য ও পরিমাপ অধিকার, পশ্চিমবঙ্গ সরকার

**খতিয়ান ও দাগের তথ্য
Khatian & Plot Information**


LIV1

পরিচিতি (Mouza Identification): Must See চয়ন করুন (Options):
 (District): -- চয়ন করুন (Please Select) -- খতিয়ান নং অনুযায়ী
 (Block): -- চয়ন করুন (Please Select) -- (Search By Khatian)
 (Mouza): -- চয়ন করুন (Please Select) -- দাগ নং অনুযায়ী
 (Search by Plot) দাগ নং (Plot No.) /

রে Data As On 21/09/2016,12:14:18)

দাগ নং (J.L.No.): 051 খানা (P.S.): বাকুড়া

দাগ নং	শ্রেণী	জমির মোট পরিমাণ(একর)	দাগের ম্যাপ
No.	Classification	Total Area of the Plot(Acre)	Plot Map
5	তড়া	16.53	Check Here

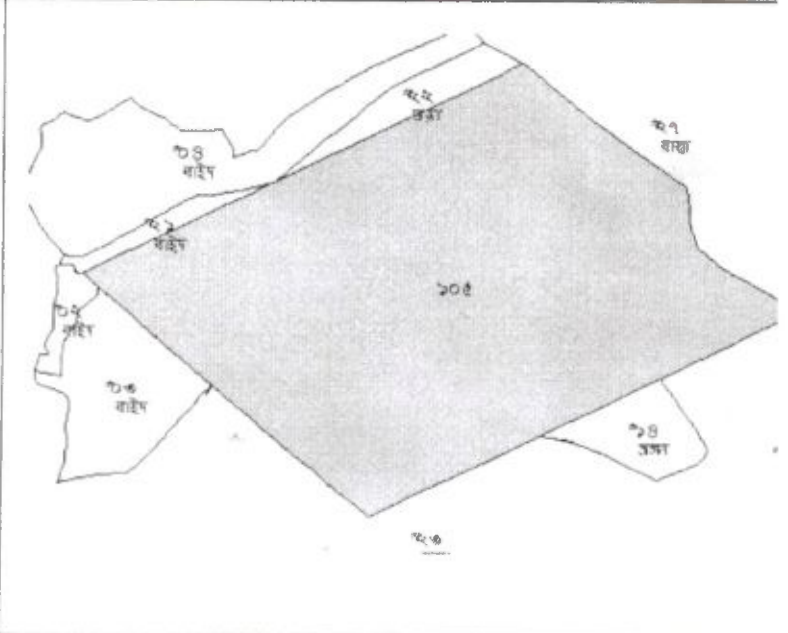

স্মারক নং	স্বামীর নাম	পিতা/স্বামী	অংশ	অংশ পরিমাণ (একর)	মন্তব্য
Sl. No.	Owner Name	Father/Husband	Share	Share Area (Acre)	Remarks
53	বাকুড়া পৌরসভা		1.0000	16.5300	Nil
73	মঙ্গলা বীর	কালিদাস বীর	0.0125	0.1100	Nil
74	মথুর বীর	কালিদাস বীর	0.0125	0.1100	Nil
75	জিতেন বীর	কালিদাস বীর	0.0125	0.1100	Nil

Content of this page is near exact replication of land record database collocated at the central server and in case of any factual error(s) in the content, viewer(s) is/are advised to contact the concerned BL&LRO office for authentication.

M. Sanyal 21.03.17

**Chairman
Bankura Municipality**

পুরুলিয়া পৌরসভার কাউন্সিলারগণের কার্যালয়

OFFICE OF THE COUNCILORS PURULIA MUNICIPALITY

দিনাঙ্ক

Date . 31.03.17.

পুরুলিয়া-৭২৩১০১

পত্রাঙ্ক

Memo. 3780. MG

Purulia-723101

To
The Director, SUDA,
Salt Lake,
Kolkata

Sub.:- Land particulars in connection with Solid Waste Management Project under preparation.
Ref.:- Your letter dated 31.03.2017

Sir,
The desired particulars on the above noted subject are furnished below.

1. Area of land(in Acre or Katha):- 10 Acres i.e. 600 Kathas
2. Plot No:- 10772
3. Khatian No.:-
4. Address:- Mouza- Charrah, J.L.No.- 131 under Purulia-II development block Dist.-Purulia
5. Ownership of Land:- Municipal Affairs Department
6. How the ULB got the possession of land:- Vested land transferred to the M.A. Department vide Land and Land Reform Depart No. 2499-GE(M)/2L-120/16 dated 12.08.2016 and taken over position by Executive Officer ,Purulia Municipality on 16.09.2016on behalf of Purulia Municipality.

This is for favour of your kind perusal and necessary action.

Your faithfully

OC, 31-03-17.
Executive Officer
Purulia Municipality

সুডা

SUDA

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

"ইলগাস ভবন", এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ

"ILGUS BHAVAN", H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং BUDA- 58/2016/2694

তারিখ 14-02-17

From : Director, SUDA &
State Mission Director, MNB (U)

To : The Commissioner,
Asansol Municipal Corporation


Sub: Initiating Tender Process for SWM Project of Asansol MC

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the Project - Swachh Asansol Solid Waste Management Project in their 1st meeting held on 5th January 2017 at Nabanna. Out of total project cost of Rs. 34.40 Crore, Government of India share i.e. Rs. 11.79 Crore will be placed to your ULB after receiving the fund from Government of India.

I am now directed to inform you to initiate the process of tendering for implementation of this SWM Project.

Yours faithfully,


Director, SUDA &
State Mission Director, MNB (U)

Copy forwarded for kind information to:

Sr. PA to the Secretary, UD & MA Department, GoWB

Director, SUDA &
State Mission Director, MNB (U)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

সুডা

রাজ্য নগর উন্নয়ন সংস্থা

SUDA

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ

“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং 309A-50/2016/2695

তারিখ 14-02-17

From : Director, SUDA &
State Mission Director, MNB (U)To : The Chief Executive Officer,
Kolkata Metropolitan Development Authority**Sub: Initiating Tender Process for SWM Projects approved for KMA ULBs**

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the following three Projects on Solid Waste Management for six KMA ULBs in their 1st meeting held on 5th January 2017 at Nabanna. Out of total Project Costs, Government of India share and Mandatory State Share may be seen in the table below. For remaining amount mentioned in the table, the UD & MA Department has moved the Finance Department with the request to approve the proposal of ULB share and Additional State Share.

Sl No.	Project of	Project Cost (in Rs. Crore)	Gol Share (in Rs. Crore)	State Share (in Rs. Crore)	Additional State Share (in Rs. Crore)	ULB share (in Rs. Crore)
1	Dum Dum, North Dum Dum, South Dum Dum & Baranagar (Cluster)	55.73	19.51	6.5	26.93	2.79
2	Bahatpara	41.82	14.64	4.88	20.21	2.09
3	Naihati	40.21	14.07	4.69	19.44	2.01

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of these SWM Projects involving the concerned ULBs.

Yours faithfully,

sd/

Director, SUDA &
State Mission Director, MNB (U)

309A-50/2016/2695/4(7)

Copy forwarded for kind information to:

1. Chairman, Dum Dum Municipality
2. Chairman, North Dum Dum Municipality
3. Chairman, South Dum Dum Municipality
4. Chairperson, Baranagar Municipality
5. Chairman, Bhatpara Municipality
6. Chairman, Naihati Municipality
7. Sr. PA to the Secretary, UD & MA Department, GoWB


Director, SUDA &
State Mission Director, MNB (U)

দুরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
 “ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং

তারিখ 14-02-17

From : Director, SUDA &
State Mission Director, MNB (U)

To : The Chief Engineer,
Municipal Engineering Directorate

Sub: Initiating Tender Process for SWM Projects approved for Non-KMA ULBs

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the following five Projects on Solid Waste Management for five Non-KMA ULBs in their 1st meeting held on 5th January 2017 at Nabanna. Out of total Project Costs, Government of India share and Mandatory State Share may be seen in the table below. For remaining amount mentioned in the table, the UD & MA Department has moved the Finance Department with the request to approve the proposal of ULB share and Additional State Share.

Sl No.	Project of	Project Cost (in Rs. Crore)	Gol Share (in Rs. Crore)	State Share (in Rs. Crore)	Additional State Share (in Rs. Crore)	ULB share (in Rs. Crore)
1	Ashoknagar-Kalyangarh & Habra (Cluster)	32.32	11.31	3.77	15.62	1.62
2	Jalpaiguri	12.88	4.51	1.5	6.23	0.64
3	Krishnanagar	18.33	6.42	2.14	8.85	0.92
4	Santipur	18.19	6.37	2.12	8.79	0.91
5	Nabadwip	14.98	5.24	1.75	7.24	0.75

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of these SWM Projects involving the concerned ULBs.

Yours faithfully,

sd/

Director, SUDA &
State Mission Director, MNB (U)

5004-50/2016/2696/1(6)

Copy forwarded for kind information to:

1. Chairman, Ashoknagar-Kalyangarh Municipality
2. Chairman, Jalpaiguri Municipality
3. Chairman, Krishnanagar Municipality
4. Chairman, Santipur Municipality
5. Chairman, Nabadwip Municipality
6. Sr. PA to the Secretary, UD & MA Department, GoWB

Director, SUDA &
State Mission Director, MNB (U)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং ...SUDA - 50/2016/2696

তারিখ ...14-02-17

From : Director, SUDA &
State Mission Director, MNB (U)

To : The Chief Engineer,
Municipal Engineering Directorate

Sub: Initiating Tender Process for SWM Projects approved for Non-KMA ULBs

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the following five Projects on Solid Waste Management for five Non-KMA ULBs in their 1st meeting held on 5th January 2017 at Nabanna. Out of total Project Costs, Government of India share and Mandatory State Share may be seen in the table below. For remaining amount mentioned in the table, the UD & MA Department has moved the Finance Department with the request to approve the proposal of ULB share and Additional State Share.

Sl No.	Project of	Project Cost (in Rs. Crore)	Gol Share (in Rs. Crore)	State Share (in Rs. Crore)	Additional State Share (in Rs. Crore)	ULB share (in Rs. Crore)
1	Ashoknagar-Kalyangarh & Habra (Cluster)	32.32	11.31	3.77	15.62	1.62
2	Jalpaiguri	12.88	4.51	1.5	6.23	0.64
3	Krishnanagar	18.33	6.42	2.14	8.85	0.92
4	Santipur	18.19	6.37	2.12	8.79	0.91
5	Nabadwip	14.98	5.24	1.75	7.24	0.75

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of these SWM Projects involving the concerned ULBs.

Yours faithfully,

Director, SUDA &
State Mission Director, MNB (U)

14-02-17

SUDA - 50/2016/2696/16)

Copy forwarded for kind information to:

1. Chairman, Ashoknagar-Kalyangarh Municipality
2. Chairman, Jalpaiguri Municipality
3. Chairman, Krishnanagar Municipality
4. Chairman, Santipur Municipality
5. Chairman, Nabadwip Municipality
6. Sr. PA to the Secretary, UD & MA Department, GoWB

Director, SUDA &
State Mission Director, MNB (U)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408



o/c

রাজ্য নগর উন্নয়ন সংস্থা

SUDA

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
 “ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA- 50/2016/2695

তারিখ 14-02-17

From : Director, SUDA &
State Mission Director, MNB (U)To : The Chief Executive Officer,
Kolkata Metropolitan Development Authority

Sub: Initiating Tender Process for SWM Projects approved for KMA ULBs

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the following three Projects on Solid Waste Management for six KMA ULBs in their 1st meeting held on 5th January 2017 at Nabanna. Out of total Project Costs, Government of India share and Mandatory State Share may be seen in the table below. For remaining amount mentioned in the table, the UD & MA Department has moved the Finance Department with the request to approve the proposal of ULB share and Additional State Share.

SI No.	Project of	Project Cost (in Rs. Crore)	Gol Share (in Rs. Crore)	State Share (in Rs. Crore)	Additional State Share (in Rs. Crore)	ULB share (in Rs. Crore)
1	Dum Dum, North Dum Dum, South Dum Dum & Baranagar (Cluster)	55.73	19.51	6.5	26.93	2.79
2	Bahatpara	41.82	14.64	4.88	20.21	2.09
3	Naihati	40.21	14.07	4.69	19.44	2.01

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of these SWM Projects involving the concerned ULBs.

Yours faithfully,

Director, SUDA &
State Mission Director, MNB (U)SUDA- 50/2016/2695/1(7)
Copy forwarded for kind information to:

1. Chairman, Dum Dum Municipality
2. Chairman, North Dum Dum Municipality
3. Chairman, South Dum Dum Municipality
4. Chairperson, Baranagar Municipality
5. Chairman, Bhatpara Municipality
6. Chairman, Naihati Municipality
7. Sr. PA to the Secretary, UD & MA Department, GoWB

Director, SUDA &
State Mission Director, MNB (U)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

রাজ্য নগর উন্নয়ন সংস্থা
STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA - 50/2016/2694

তারিখ 14-02-17

From : Director, SUDA &
State Mission Director, MNB (U)

To : The Commissioner,
Asansol Municipal Corporation


Sub: Initiating Tender Process for SWM Project of Asansol MC

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the Project - Swachh Asansol Solid Waste Management Project in their 1st meeting held on 5th January 2017 at Nabanna. Out of total project cost of Rs. 34.40 Crore, Government of India share i.e. Rs. 11.79 Crore will be placed to your ULB after receiving the fund from Government of India.

I am now directed to inform you to initiate the process of tendering for implementation of this SWM Project.

Yours faithfully,



Director, SUDA &
State Mission Director, MNB (U)

At 14-02-17

SUDA - 50/2016/2694/1(U)

Copy forwarded for kind information to:

Sr. PA to the Secretary, UD & MA Department, GoWB



Director, SUDA &
State Mission Director, MNB (U)

Draft

From : Director, SUDA &
State Mission Director, MNB (U)

To : The Chief Executive Officer,
Kolkata Metropolitan Development Authority

Sub: Initiating Tender Process for SWM Projects approved for KMA ULBs

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the following three Projects on Solid Waste Management for six KMA ULBs in their 1st meeting held on 5th January 2017 at Nabanna. Out of total Project Costs, Government of India share and Mandatory State Share may be seen in the table below. For remaining amount mentioned in the table, the UD & MA Department has moved the Finance Department with the request to approve the proposal of ULB share and Additional State Share.

Sl No.	Project of	Project Cost (in Rs. Crore)	Gol Share (in Rs. Crore)	State Share (in Rs. Crore)	Additional State Share (in Rs. Crore)	ULB share (in Rs. Crore)
1	Dum Dum, North Dum Dum, South Dum Dum & Baranagar (Cluster)	55.73	19.51	6.5	26.93	2.79
2	Bahatpara	41.82	14.64	4.88	20.21	2.09
3	Naihati	40.21	14.07	4.69	19.44	2.01

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of these SWM Projects involving the concerned ULBs, ~~if required.~~

Yours faithfully,

Director, SUDA &
State Mission Director, MNB (U)

Copy forwarded for kind information to:

1. Chairman, Dum Dum Municipality
2. Chairman, North Dum Dum Municipality
3. Chairman, South Dum Dum Municipality
4. Chairperson, Baranagar Municipality
5. Chairman, Bhatpara Municipality
6. Chairman, Naihati Municipality
7. Sr. PA to the Secretary, UD & MA Department, GoWB

Director, SUDA &
State Mission Director, MNB (U)

Draft

From : Director, SUDA &
State Mission Director, MNB (U)
To : The Chief Engineer,
Municipal Engineering Directorate

Sub: Initiating Tender Process for SWM Projects approved for Non-KMA ULBs

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the following five Projects on Solid Waste Management for five Non-KMA ULBs in their 1st meeting held on 5th January 2017 at Nabanna. Out of total Project Costs, Government of India share and Mandatory State Share may be seen in the table below. For remaining amount mentioned in the table, the UD & MA Department has moved the Finance Department with the request to approve the proposal of ULB share and Additional State Share.

Sl No.	Project of	Project Cost (in Rs. Crore)	Gol Share (in Rs. Crore)	State Share (in Rs. Crore)	Additional State Share (in Rs. Crore)	ULB share (in Rs. Crore)
1	Ashoknagar-Kalyangarh & Habra (Cluster)	32.32	11.31	3.77	15.62	1.62
2	Jalpaiguri	12.88	4.51	1.5	6.23	0.64
3	Krishnanagar	18.33	6.42	2.14	8.85	0.92
4	Santipur	18.19	6.37	2.12	8.79	0.91
5	Nabadwip	14.98	5.24	1.75	7.24	0.75

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of these SWM Projects involving the concerned ULBs, ~~if required~~.

Yours faithfully,

**Director, SUDA &
State Mission Director, MNB (U)**

Copy forwarded for kind information to:

1. Chairman, Ashoknagar-Kalyangarh Municipality
2. Chairman, Jalpaiguri Municipality
3. Chairman, Krishnanagar Municipality
4. Chairman, Santipur Municipality
5. Chairman, Nabadwip Municipality
6. Sr. PA to the Secretary, UD & MA Department, GoWB

**Director, SUDA &
State Mission Director, MNB (U)**

Draft

From : Director, SUDA &
State Mission Director, MNB (U)

To : The Commissioner,
Asansol Municipal Corporation

Sub: Initiating Tender Process for SWM Project of Asansol MC

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the Project - Swachh Asansol Solid Waste Management Project in their 1st meeting held on 5th January 2017 at Nabanna. Out of total project cost of Rs. 34.40 Crore, Government of India share i.e. Rs. 11.79 Crore will be placed to your ULB after receiving the fund from Government of India.

I am now directed to inform you to initiate the process of tendering for implementation of this SWM Project.

Yours faithfully,

**Director, SUDA &
State Mission Director, MNB (U)**

Copy forwarded for kind information to:

Sr. PA to the Secretary, UD & MA Department, GoWB

**Director, SUDA &
State Mission Director, MNB (U)**



राज्य नगर उन्नयन संस्था

SUDA

STATE URBAN DEVELOPMENT AGENCY

"ইলগাস ভবন", এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
"ILGUS BHAVAN", H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং

তারিখ 14-02-17

From : Director, SUDA &
State Mission Director, MNB (U)

To : The Commissioner,
Asansol Municipal Corporation

Sub: Initiating Tender Process for SWM Project of Asansol MC

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the Project - Swachh Asansol Solid Waste Management Project in their 1st meeting held on 5th January 2017 at Nabanna. Out of total project cost of Rs. 34.40 Crore, Government of India share i.e. Rs. 11.79 Crore will be placed to your ULB after receiving the fund from Government of India.

I am now directed to inform you to initiate the process of tendering for implementation of this SWM Project.

Yours faithfully,

Sd/-

Director, SUDA &
State Mission Director, MNB (U)

dt- 14-02-17

সুদা- 50/2016/2694/1(1)
Copy forwarded for kind information to:

Sr. PA to the Secretary, UD & MA Department, GoWB



Director, SUDA &
State Mission Director, MNB (U)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

"ইলগাস ভবন", এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
 "ILGUS BHAVAN", H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA- ১০/২০১৬/২৬৭১

তারিখ 14-02-17

From : Director, SUDA &
 State Mission Director, MNB (U)

To : The Chief Executive Officer,
 Kolkata Metropolitan Development Authority

Sub: Initiating Tender Process for SWM Projects approved for KMA ULBs

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the following three Projects on Solid Waste Management for six KMA ULBs in their 1st meeting held on 5th January 2017 at Nabanna. Out of total Project Costs, Government of India share and Mandatory State Share may be seen in the table below. For remaining amount mentioned in the table, the UD & MA Department has moved the Finance Department with the request to approve the proposal of ULB share and Additional State Share.

SI No.	Project of	Project Cost (in Rs. Crore)	Gov Share (in Rs. Crore)	State Share (in Rs. Crore)	Additional State Share (in Rs. Crore)	ULB share (in Rs. Crore)
1	Dum Dum, North Dum Dum, South Dum Dum & Baranagar (Cluster)	55.73	19.51	6.5	26.93	2.79
2	Bahatpara	41.82	14.64	4.88	20.21	2.09
3	Naihati	40.21	14.07	4.69	19.44	2.01

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of these SWM Projects involving the concerned ULBs.

Yours faithfully,

Director, SUDA &
 State Mission Director, MNB (U)

Copy forwarded for kind information to:

1. Chairman, Dum Dum Municipality
2. Chairman, North Dum Dum Municipality
3. Chairman, South Dum Dum Municipality
4. Chairperson, Baranagar Municipality
5. Chairman, Bhatpara Municipality
6. Chairman, Naihati Municipality
7. Sr. PA to the Secretary, UD & MA Department, GoWB

Director, SUDA &
 State Mission Director, MNB (U)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408



৪৭৮

রাজ্য নগর উন্নয়ন সংস্থা

SUDA

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
“ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA - 50/2016/2696

তারিখ 14-02-17

From : Director, SUDA &
State Mission Director, MNB (U)

To : The Chief Engineer,
Municipal Engineering Directorate

Sub: Initiating Tender Process for SWM Projects approved for Non-KMA ULBs

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the following five Projects on Solid Waste Management for five Non-KMA ULBs in their 1st meeting held on 5th January 2017 at Nabanna. Out of total Project Costs, Government of India share and Mandatory State Share may be seen in the table below. For remaining amount mentioned in the table, the UD & MA Department has moved the Finance Department with the request to approve the proposal of ULB share and Additional State Share.

Sl No.	Project of	Project Cost (in Rs. Crore)	Gol Share (in Rs. Crore)	State Share (in Rs. Crore)	Additional State Share (in Rs. Crore)	ULB share (in Rs. Crore)
1	Ashoknagar-Kalyangarh & Habra (Cluster)	32.32	11.31	3.77	15.62	1.62
2	Jalpaiguri	12.88	4.51	1.5	6.23	0.64
3	Krishnanagar	18.33	6.42	2.14	8.85	0.92
4	Santipur	18.19	6.37	2.12	8.79	0.91
5	Nabadwip	14.98	5.24	1.75	7.24	0.75

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of these SWM Projects involving the concerned ULBs.

Yours faithfully,

Director, SUDA &
State Mission Director, MNB (U)

Copy forwarded for kind information to:

1. Chairman, Ashoknagar-Kalyangarh Municipality
2. Chairman, Jalpaiguri Municipality
3. Chairman, Krishnanagar Municipality
4. Chairman, Santipur Municipality
5. Chairman, Nabadwip Municipality
6. Sr. PA to the Secretary, UD & MA Department, GoWB

Received for kind information
Office of the Chief Engineer, M. E. Dept
Bikash Bhawan, (South Block)
1st Floor, Salt Lake, Kol-91

Director, SUDA &
State Mission Director, MNB (U)

দূরভাষ : ২৩৫৮ ৬৪০৩ / ৫৭৬৭, ফ্যাক্স : ২৩৫৮ ৫৮০০

Tel : 2358 6403/5767, Fax : 2358 5800, E-mail : wbsudadir@gmail.com

Account Section : 2358 6408

রাজ্য নগর উন্নয়ন সংস্থা

STATE URBAN DEVELOPMENT AGENCY

“ইলগাস ভবন”, এইচ-সি ব্লক, সেক্টর-৩, বিধাননগর, কলকাতা-৭০০ ১০৬, পশ্চিমবঙ্গ
 “ILGUS BHAVAN”, H-C Block, Sector - III, Bidhannagar, Kolkata - 700 106, West Bengal

ক্রমিক নং SUDA-50/2016/2692

তারিখ 13-02-2017

From : Director, SUDA &
 State Mission Director, MNB (U)

To : The Municipal Commissioner,
 Kolkata Municipal Corporation
 5, S. N. Banerjee Road,
 Kolkata-700013

Sub: Initiating Tender Process for SWM Project of KMC

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the Project on Strengthening Primary and Secondary Solid Waste Management System in Kolkata City in their 1st meeting held on 5th January 2017 at Nabanna. Out of total project cost of Rs. 152.83 Crore, Government of India share is Rs. 53.49 Crore and Mandatory State Share is Rs. 17.83 Crore. For remaining amount, the UD & MA Department has moved the Finance Department with the request to approve the proposal of Rs. 15.28 Crore as KMC share and Rs. 66.23 Crore as Additional State Share.

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of this SWM Project.

Yours faithfully,



Director, SUDA &
 State Mission Director, MNB (U)

SUDA-50/2016/2692/1(1)

Copy forwarded for kind information to:

Sr. PA to the Secretary, UD & MA Department, GoWB



Director, SUDA &
 State Mission Director, MNB (U)

Staff

From : Director, SUDA &
State Mission Director, MNB (U)

To : The Municipal Commissioner,
Kolkata Municipal Corporation
5, S. N. Banerjee Road,
Kolkata-700013

Sub: Initiating Tender Process for SWM Project of KMC

Sir,

You are aware that the State High Powered Committee under Mission Nirmal Bangla (Urban) has approved the Project on Strengthening Primary and Secondary Solid Waste Management System in Kolkata City in their 1st meeting held on 5th January 2017 at Nabanna. Out of total project cost of Rs. 152.83 Crore, Government of India share is Rs. 53.49 Crore and Mandatory State Share is Rs. 17.83 Crore. For remaining amount, the UD & MA Department has moved ^{the} to Finance Department with the request to approve the proposal of Rs. 15.28 Crore as KMC share and Rs. 66.23 Crore as Additional State Share.

In anticipation of approval from Finance Department, I am directed to inform you to initiate the process of tendering for implementation of this SWM Project.

Yours faithfully,

**Director, SUDA &
State Mission Director, MNB (U)**

Copy forwarded for kind information to:

Sr. PA to the Secretary, MA Department, GoWB

**Director, SUDA &
State Mission Director, MNB (U)**

**Minutes of the 1st Meeting of State High Powered Committee
under Mission Nirmal Bangla (Urban)/Swachh Bharat Mission (Urban)**

Date: 5th January 2017

Time: 11.30 AM

Venue: Conference Hall of the
Chief Secretary at Nabanna

List of the Members and other Participants Present: Placed at Annexure-VI

The Chief Secretary to Government of West Bengal and the Chairman of the State High Powered Committee under Mission Nirmal Bangla (Urban)/Swachh Bharat Mission (Urban) chaired the meeting.

At the outset, the Secretary, Urban Development & Municipal Affairs Department, Government of West Bengal welcome all the members of the Committee and explained the overall plan and activities under Mission Nirmal Bangla (Urban). He made a detailed presentation on the agendas of the meeting.

Detailed discussion took place on the Concept, Plan and Process of the proposed Solid Waste Management Projects, Action Plan of all Components for the year 2016-17 including IEC & Capacity Building Plans, Claim of fund from Government of India in the year 2016-17 and Miscellaneous issues.

Salient features of discussions and decisions taken :

Solid Waste Management:

1. DPRs of following 10 Solid Waste Management Projects of 14 ULBs of West Bengal have been placed before the Committee for consideration. The SWM Projects are technically appraised by Reputed Institutes/Technical Wings of the Government and approved by the concerned ULBs. Lands are available with the ULBs in each case. After detailed deliberation, the Committee has approved the DPRs of following SWM Projects:
 - a) DPR of four ULBs (in Cluster Mode) namely Dum Dum, North Dum Dum, South Dum Dum and Baranagar Municipalities.
 - b) DPR of two ULBs (in Cluster Mode) namely Habra and Ashoknagar-Kalyanagar Municipalities.
 - c) DPR of Jalpaiguri Municipality.
 - d) DPR of Krishnanagar Municipality.
 - e) DPR of Santipur Municipality.
 - f) DPR of Nabadwip Municipality
 - g) DPR of Bhatpara Municipality.
 - h) DPR of Naihati Municipality.
 - i) DPR of Kolkata MC
 - j) DPR (Phase-I) of Asansol Municipal Corporation.

Details of the Projects are placed at Annexure-1

2. It was decided that beyond the Government of India share i.e. 35% or as admissible of the Project Cost, the remaining will be borne by the State Government and ULB. This fund sharing pattern is approved in principle and UD & MA Department will finally obtain approval from Finance Department.

IEC/Interpersonal Behavioural Change Communication:

3. It was discussed that the major challenge of the Solid Waste Management Projects is awareness generation through Interpersonal Behavioural Change Communication. For this, it was decided that a Combined Interpersonal Behavioural Change Communication Process will be developed by UD & MA Department and P&RD Department jointly utilizing the support of UNICEF. In this regard, support of the Department of Information & Cultural Affairs will be very much essential.

Annual Action Plan for the Year 2016-17:

4. The Committee has approved the Information, Education & Communication (IEC) Action Plan of Rs. 24 Crore for the year 2016-17, which has already been submitted to Government of India.

Details of the IEC Action Plan is placed at **Annexure-II**

5. The Committee has approved the Capacity Building Action Plan of Rs. 13 Crore for the year 2016-17, which has already been submitted to Government of India.

Details of the Capacity Building Action Plan is placed at **Annexure-III**

6. The Committee has approved the Annual Action Plan of all Components for the year 2016-17 amounting to total Gol Share of Rs. 424.79 Crore, which has already been submitted to Government of India.

Details of the Annual Action Plan of all Components is placed at **Annexure-IV**

Claim of Fund from Gol in the Year 2016-17:

7. The Committee has approved the Claim of Fund amounting to Rs. 329.93 Crore from Government of India in the year 2016-17, which has already been submitted to Government of India.

Details of the Claim of Fund from Government of India is placed at **Annexure-V**

Miscellaneous:

8. It was discussed that a data base on existence of Open Drains in the ULBs should be developed and it was decided that a low cost scheme will be designed for covering those open drains in Urban Areas. In this regard, UD & MA Department will take necessary action.

9. It has been observed that the market areas & its nearby drains of urban areas remain very much dirty due to accumulation of wastes. For this, it was decided to prepare a plan for Cleanliness and Waste Management including drainage system in the markets of Urban Areas. Taking these aspects into account a new model of market may be designed and Kolkata MC will implement a pilot project in this respect. In this regard, UD & MA Department will take necessary action.

Meeting ended with thanks to and from the chair.



(Basudeb Banerjee)

Chief Secretary to Government of West Bengal
& Chairman, SHPC, MNB (U)

Annexure-I

Details of the SWM Projects approved by SHPC

- a) A DPR (Phase-I) of four ULBs (in Cluster Mode) namely Dum Dum, North Dum Dum, South Dum Dum and Baranagar Municipalities with a total project cost of Rs.55.73 Crore prepared by MED and appraised by Institute of Public Health Engineer (IPHE), India.
- b) A DPR of Two ULBs (in Cluster Mode) namely Habra and Ashoknagar-Kalyangarh Municipalities with a total project cost of Rs. 32.32 Crore prepared by two ULBs and appraised by Municipal Engineering Directorate (MED).
- c) A DPR of Jalpaiguri Municipality with a total project cost of Rs. 12.88 Crore prepared by the ULB and appraised by MED.
- d) A DPR of Krishnanagar Municipality with a total project cost of Rs. 18.33 Crore prepared by the ULB and appraised by MED.
- e) A DPR of Santipur Municipality with a total project cost of Rs. 18.19 Crore prepared by the ULB and appraised by MED.
- f) A DPR of Nabadwip Municipality with a total project cost of Rs. 14.98 Crore prepared by the ULB and appraised by MED.
- g) A DPR of Bhatpara Municipality with a total project cost of Rs. 41.82 Crore prepared by the ULB/Agency and appraised by Kolkata Metropolitan Development Authority (KMDA).
- h) A DPR of Naihati Municipality with a total project cost of Rs. 40.21 Crore prepared by the ULB/Agency and appraised by KMDA.
- i) A DPR of Rs. 152.83 Crore of Integrated Solid Waste Management of Kolkata MC prepared by Kolkata MC and already appraised by CPHEEO.
- j) A DPR (Phase-I) of Rs. 34.40 Crore in Asansol Municipal Corporation on MSWM prepared by MoUD, Gol has been received. The Ministry vide D.O. No. JS-MD/MoUD/SBM/OS-2016/34 dated 27.10.2016 informed that as MoUD has prepared this DPR, so no Third Party Evaluation/Appraisal is required for this DPR.

Annexure-II

Details of the IEC Action Plan for 2016-17 approved by SHPC

Sl. No.	Items & Particulars	Amount (Rs. in lakhs)
Advertisements through Mass Media		
1.	Radio Spots (AIR + FM + Available Community Radio Stations) including Sponsored Programmes on different components of SBM for both AIR/FM and Community Radios	300.00
Advertisements through Print Media		
2.	Stickers/Flexes (Bus Panels, Bus Tickets, Seats), (Autos/Cycle Rickshaw Panels)	170.50
3.	Printing of Logo and Messages on: - Notebook (Circulated for CB & T) Front and Back Cover Pages - Inside and back cover pages of free textbooks and notebooks	350.00
4.	Leaflets, Pamphlets, Posters, Booklets etc.	120.00
5.	Temporary Hoardings/Bill Boards	145.00
6.	Wall Paintings	75.00
Awareness Camps & Traditional Media		
7.	Folk Media & Fairs	300.00
8.	Social Media	20.00
Narrow Cast		
9.	Short Films for showing in local cable channels/tagged with folk media screening	75.00
10.	Production of audio CDs, audio-visual CDs, Documentary/ Docu-Drama/ Docu-Feature Films on innovations and best practices for awareness generation	100.00
Interpersonal Communication & Campaigns		
11.	Other activities under IEC, viz. Senior Citizen's Programme, Quiz Programme in Schools & Colleges, Road Shows & Tableau, School Children Awareness Programmes and Theme Based Cleanliness Drive	149.50
12.	Campaigns by SHGs and Federations	265.00
13.	Celebration of National & International Days such as Environment Day (5 th June), Hand Washing Day (15 th October), World Toilet Day (19 th November)	75.00
Development of Website and Formation of Monitoring Systems		
14.	Development of Website for the Programme Sub-Components and also for MIS, M&E (with ULB login) (This includes O&M of [Infrastructure & Maintenance])	5.00
15.	Establishment of Monitoring Systems/Committee at the ULB levels: 1. For evolving local mechanisms to ensure that there is no open defecation, people are using toilets, cleanliness drives initiated by schools and colleges and Anganwadi centres etc. 2. For updating data, audio-video clips, photographs	250.00
Grand Total		2400.00

Annexure-III

Details of the Capacity Building Action Plan for 2016-17 approved by SHPC

Sl. No.	Items & Particulars	Amount (Rs. In lakhs)
Capacity Building		
1.	Capacity Building and Training Programmes for various stakeholders on Swachh Bharat Mission	300.00
2.	Workshops on Thematic Issues for various stakeholders	300.00
3.	Capacity Building and Training Programmes on IEC	400.00
4.	Exposure Visits to better performing ULBs both at the Districts, State and inter-state levels that have demonstrated innovative models of sanitation and best practices like innovative School sanitation models, Solid and Liquid Waste Management (SLWM) projects managed by women SHGs, eco-friendly toilet construction sites etc.	300.00
Grand Total		1300.00

[Handwritten signature]

Annexure-IV

Details of the Annual Action Plan of all Components for 2016-17 approved by SHPC

Sl No.	Components	Action Plan	Estimated Project Cost	Total Central Share (Rs. in Crore)
1	Individual Household Latrine	Construction of 120000 Unit	Rs.131.88 Crore (@10990/-)	43.00
2	Community Toilet	Construction of 2000 Seats	Rs. 19.60 Crore (@98000/- per seat)	7.84
3	Public Toilet	Construction of 1000 Toilet Seats	Rs. 9.80 Crore (@98000/- per seat)	3.92
		Construction of 1000 Urinal Seats	Rs. 3.2 Crore (@32000/- per seat)	1.28
4	Solid Waste Management	Coverage of 80 Lakh population in Projects of prioritised 10 cities	Rs. 960 Crore (@1200/- per capita)	336.00
5	IEC	Miscellaneous IEC activities in State, District, ULBs	Action Plan of Rs. 24 Crore has already been submitted to MoUD vide Memo no. SUDA-37/2015/938 dated 17.05.2016	18.00
6	CB & A&OE	Miscellaneous CB activities and A&OE Expenses	Action Plan of Rs. 13 Crore has already been submitted to MoUD vide Memo no. SUDA-37/2015/938 dated 17.05.2016	9.75
TOTAL				424.79

Note: The priority of IHHL component implementation is being set as per District-wise priority of Panchayat & Rural Development Department, Government of West Bengal

Annexure-V

Details of Claim of Fund from Government of India in the year 2016-17
approved by SHPC

Rs. in Crore

Sl No	Financial Year	Installment	SWM Amount	IHHL Amount	CT Amount	PT Amount	PT - Urinal Amount	IEC Amount	CB & A&OE Amount	Total Amount
1	2014-15	2nd	34.54	21.12	0	0	0	6.68	1.67	64.01
2	2015-16	2nd	0	53.52	0	0	0	0	0	53.52
3	2016-17	1st	168	24	3.92	1.96	0.64	9	4.88	212.4
TOTAL			202.54	98.64	3.92	1.96	0.64	15.68	6.55	329.93

Annexure-VI

List of Members and Other Participants Present

1. Sri Basudeb Banerje, IAS, Chief Secretary, GoWB
2. Sri Arnab Roy, IAS, Principal Secretary, Environment Department
3. Sri A. Bhattacharya, IAS, Principal Secretary, I & C.A Department
4. Sri Onkar Singh Meena, IAS, Secretary, UD & MA Department
5. Sri Khalil Ahemed, IAS, Municipal Commissioner, Kolkata MC.
6. Sri D. Nariala, IAS, Secretary, School Education Department
7. Sri A. Bhattacharyya, IAS, Commissioner, H & FW Department
8. Sri N. G. Hira, IAS, Commissioner, CD,WD & SW Department
9. Sri Dibyendu Sarkar, IAS, Commissioner, P & RD Department
10. Sri Sudipta Chatterjee, IAS, S.P.D., PBSSM, School Education Department
11. Sri Anil Kumar, Under Secretary, Ministry of Urban Development, Gol
12. Sri Bikash Ranjan Podder, Chief Engineer, Public Health Engineering Department
13. Sri Sunit Ranjan Sikdar, D.L.B., UD & MA Department
14. Sri Amit Das, Chief Engineer, MED, UD & MA Department
15. Sri Debkumar Chakraborti, Senior Consultant (WASH), UNICEF
16. Dr. Kaninika Mitra, Health Specialist, UNICEF
17. Smt Meital Rusdia, Chief Field Office, UNICEF

18. Sri Sutanu Kar, IAS, Additional Secretary, UD & MA Department
19. Sri Upendra Nath Sarkar, Special Secretary & Director, SUDA, UD & MA Department
20. Sri B. N. Kar, Additional Director, ILGUS, UD & MA Department
21. Sri Santanu Mukherjee, Joint Secretary, UD & MA Department
22. Sri R. M. Chatterjee, D.G.O., KMDA, UD & MA Department
23. Dr. Sujay Mitra, Poverty Monitoring Expert, CMU, UD & MA Department
24. Sri Subhasish Chattopadhyay, D.G.(SWM), Kolkata MC
25. Sri Saumya Bandyopadhyay, Assistant Engineer, M.E.D, UD & MA Department
26. Sri Sudhin Kar, C.M., SLB, Lbd, United Bank of India, H.O.

Subject: Appraisal of Detailed Project Report on Solid Waste Management for Bhatpara Municipality Prepared by Senes Consultant India Pvt. Ltd. on behalf of Bhatpara Municipality .

KMDA has carried out the technical appraisal of the aforementioned DPR and appraisal comments of the DPR is stated below.

The problem of ineffective municipal solid waste management (MSWM) is prevailing in the urban environment of Bhatpara. DPR was framed to achieve scientific management of the municipal solid waste in Bhatpara.

Bhatpara being an important growing municipality, it is very important to maintain cleanliness and environmental hygiene in the municipal area. Due to unavailability of suitable facilities for treatment and disposal of the large amount of MSW generated daily in Bhatpara, the waste generated is majorly dumped into the immediate vicinity and thereby necessitate management of the MSW to accommodate the changes in its quantity and quality and to ensure clean environment of the municipality.

DPR framed has considered the following major aspects for management of Solid Waste.

- Minimizing Waste
- Maximizing environmental friendly waste reuse and recycling
- Promoting environmental friendly waste disposal and treatment; and
- Extending the coverage of waste management services.

Bhatpara is one of the growing municipalities of North 24 Parganas, West Bengal. The municipality is spread over 32.55 sq.kms. As per census 2011, the municipality population is 3.86 lakhs. The growth rate is about 2.00% per annum. The municipal area is developing at a rapid pace and the population is expected to reach about 4.29 lakhs by the year 2019 and 2025 about 4.536 lakhs. Bhatpara Municipality is characterized by a pattern of multiple land uses. Residential use occupies about half the area and commercial zones occupy less than 2.5%. Bhatpara is plagued by problems of informal sector including slum development, illegal colonies and commercial activities. The total area developed for urban activities constitute about 65% of the city area. At present, there are 93 slums having populations about 1.05 Lakhs. Present average generation of waste is about 320 grams per capita per day which will be about 365 grams per capita at the end of the year 2026.

Total waste generated at present in the municipal area is 160 MT out of which the expected bio-degradable waste is 78 MT and recyclable waste is 20 MT. The non bio degradable/ street sweeping/ drain cleaning/ building rubbish is around 62 MT. Total waste to be processed at the engineered land fill is around 80 MT out of which 18 MT from inert waste from compost plant.

For the development of SWM in Bhatpara Municipality, the following components have been included:-

- Segregation of recyclable / non bio degradable waste at source by providing household/ community bins.

- Effective primary collection of waste
- Transportation of primary collected waste to secondary transfer station and compost plant.
- Cleaning of drains
- Processing of waste in compost plant by mechanical compost plant with windrow method together with engineered landfill.
- Movable vehicle at processing plant and landfill site.
- Beautification of the engineered landfill site with plantation of trees.

Bhatpara Municipality has 10.50 Acre vacant land wherein the mechanical compost plant of capacity 95MT has been proposed in the DPR for installation taking into consideration 10 years projection. The compost manure expected to be generated will be in the tune of 20MT per day at the present. The land area available for engineered landfill 10.50 Acre which will have 10 years active life. Leachate generated will be reused in the windrows of the compost plant. Effective landfill gas management has also been included in the DPR.


The abstract cost for the system is included in the DPR is as follows:-


Sl. No.	Component	Amount in Lakhs (in INR)
1.	Primary Collection Equipment	446.16
2.	Secondary Collection Equipment's and Vehicles	338.87
3.	Processing Plant including Infrastructure and Sanitary Landfill	2737.10
4.	Movable Vehicle at Processing Plant and Landfill site	219.60
5.	Battery Operated Cart (2 nos. each ward: 62 nos. @ Rs.2.0 Lakhs each)	124.00
6.	Movable compactor with tip cart mechanism and Operation and Maintenance of the compactor for 3 years	257.00
7.	Supplying and Planting of different plant/trees	8.03
	Total	4181.76

It has been observed that to ensure and encourage the aspect of segregation at source and also during transportation of segregated waste, necessary equipments has been included in the DPR to be provided to each of the household and also to the municipality. The segregated biodegradable waste will then be transferred to the processing plant in the form of mechanical compost and to be located in the campus of land fill site. The land available is away from habitation limit. The rejectable from the compost plant can be effectively disposed to land fill site with minimal transportation cost. Effective recyclable ^{material} can also be organized at the transfer station at compost site.

The DPR appears to be a replica of the KSWMIP Project recently commissioned for 6 municipalities in Hooghly District under JICA finance and cost included is also comparable with the said Project.

The appraised DPR is recommended for consideration of approval by the appropriate committee under Swachh Bharat Mission (Urban).


Additional Chief Engineer,
SD & SWM Sector, KMDA


Chief Engineer,
SD & SWM Sector, KMDA

Subject: Appraisal of Detailed Project Report on Solid Waste Management for **Naihati Municipality** Prepared by Senes Consultant India Pvt. Ltd. on behalf of **Naihati Municipality** .

KMDA has carried out the technical appraisal of the aforementioned DPR and appraisal comments of the DPR is stated below.

The problem of ineffective municipal solid waste management (MSWM) is prevailing in the urban environment of Naihati. DPR has been framed to achieve scientific management of the municipal solid waste in Naihati.

Naihati being an important growing municipality, it is very important to maintain cleanliness and environmental hygiene in the municipal area. Due to unavailability of suitable facilities for treatment and disposal of the large amount of MSW generated daily in Naihati, the waste generated is majorly dumped into the immediate vicinity and thereby necessitates management of the MSW to accommodate the changes in its quantity and quality and to ensure clean environment of the municipality.

DPR framed has considered the following major aspects for management of Solid Waste .

- Minimizing Waste
- Maximizing environmental friendly waste reuse and recycling
- Promoting environmental friendly waste disposal and treatment; and
- Extending the coverage of waste management services.

Naihati is one of the growing municipalities of North 24 Parganas, West Bengal. The municipality is spread over 11.55 sq.kms. As per census 2011, the municipality population is 2.21 lakhs. The growth rate is about 2.07% per annum. The municipal area is developing at a rapid pace and the population is expected to reach about 2.67 lakhs by the year 2020 and 2025 about 2.95 lakhs. Naihati Municipality is characterized by a pattern of multiple land uses. Residential use occupies about half the area and commercial zones occupy less than 2.5%. Naihati is plagued by problems of informal sector including slum development, illegal colonies and commercial activities. The total area developed for urban activities constitute about 65% of the city area. At present, there are slums having population about 41,363. Present average generation of waste is about 330 grams per capita per day which will increase to 375 grams per capita at the end of the year 2026.

Total waste generated at present in the municipal area is 92MT out of which the expected bio-degradable waste is 44MT and recyclable waste is 10 MT. The non bio degradable/ street sweeping/ drain cleaning/ building rubbish is around 38MT. Total waste to be processed at the engineered land fill is around 48MT out of which 10MT from inert waste from compost plant.

For the development of SWM in Naihati Municipality, the following components have been included:-

Abstract copy of the minutes of the Ordinary Meeting of the Councillors of the Bhatpara Municipality at the Municipal Office, Bhatpara on Thursday, the 24th November, 2016 at 3-00 P.M.

P R E S E N T

01. Sri/Smt. Arjun Singh, M.L.A.	Chairman
02. Sri/Smt. Somnath Talukdar	Vice-Chairman
03. " Promod Kumar Singh	Member, C-in-C
04. " Md. Maqsood Alam	.do.
05. " Madan Mohan Ghosh	.do.
06. " Manoj Guha	.do.
07. " Deba Prasad Sarkar	.do.
08. " Arun Banerjee	Councillor
09. " Biman Bose	.do.
10. " Gita Devi Yadav	.do.
11. " Himanshu Sarkar (Bapi)	.do.
12. " Biswanath Ghosh	.do.
13. " Durba Bhattacharyya	.do.
14. " Kamala Agarwal	.do.
15. " Md. Nasiruddin Khan	.do.
16. " Mili Dutta	.do.
17. " Pallabi Kundu (Das)	.do.
18. " Sima Mondal	.do.
19. " Prabir Baidya	.do.
20. " Khusbun Nisha	.do.
21. " Sunil Neogi	.do.
22. " Kalpana Lahiri	.do.
23. " Jyoti Shaw	.do.
24. " Mohan Das	.do.
25. " Sankari Dutta	.do.
26. " Sibani Mondal	.do.
27. " Sohan Prasad Chowdhury	.do.
28. " Aditi Sarkar	.do.
29. " Bibha Biswas	.do.
30. " Sampa Dey (Nath)	.do.

BUSINESS:

07. Re: Adoption of Solid Waste Management Project under Swachh Bharat Mission;

Initiating the discussion, the Chairman stated that the Bhatpara Municipality has prepared a DPR of Solid Waste Management (SWM) Scheme with the help of KMDA. The total project cost of ₹ 41.81 Crore has been submitted to SUDA to be placed in the Swachh Bharat Mission (Nirmal Bangla) Project. Two numbers land one at Mouza- Narayanpur and another at Mouza- Madral have been earmarked for the project.

22
OFFICE OF THE MUNICIPAL COUNCILLORS

BHATPARA

Address 1/1, West Ghoshpara Road, P.O. Kankinara, Dist-North 24-Parganas Pin-743126

From: Sri Arjun Singh, M.L.A,
Chairman,
Bhatpara Municipality

To: Director, SUDA & State Mission Director,
SBM (U) ILGUS Bhawan, HC Block
Sector III, Salt Lake City, Kolkata: 700106

No. J-2/WW/DR-1/4295

Date: - 28th November, 2016

Sub: DPR of Solid Waste Management Project of Bhatpara municipality.
Ref: SUDA-287/2016/1933(12) dated 17.11.2016.

Sir,

As per discussion in the meeting dated 21.11.2016, I am sending herewith the extract copy of the BOC resolution dated 24.11.2016 regarding adaptation of solid waste management project of our municipality.

Thanking You,

Yours faithfully,


Chairman,

Bhatpara Municipality

Encl:- As above



The Chairman then proposed that as the project was previously started under JnNURM where Municipality has agreed to contribute 5% of the total project cost as ULB's share this time also Municipality should have agreed to contribute 5% of the total project cost as ULB's share.

After making a thorough discussion, the Board of Councillors have unanimously accepted the proposal of the Chairman and the Chairman was authorized to take follow up action in the matter .

The Meeting ended with the vote of thanks to and from the chair.

Sd/-Sri Arjun Singh

Municipal Office,
Bhatpara

Chairman,
Bhatpara Municipality

Certified to be a true copy.


Chairman,
Bhatpara Municipality

GOVERNMENT OF WEST BENGAL
OFFICE OF THE CHIEF ENGINEER
Municipal Engineering Directorate

Bikash Bhawan, South Block (1st Floor) Salt Lake, Kolkata – 700091
Phone No: (033)2337-1331/ (033)2358-3347 \ Fax: (033) 2337-5472 /2337-5474
E-mail: ce_medte@yahoo.com

No. ME/ 1962/1P-48/2015

Dated 17/11/16

From : The Chief Engineer
M. E. Dte.
Bikash Bhawan

To : The Director, SUDA, &
The State Mission Director,
Swachh Bharat Mission (Urban)
ILGUS Bhaban, H.C.Block, Sector-III,
Salt Lake, Kolkata- 700 106.



Sub: Appraisal Report of Municipal Solid Waste Management Projects within Jalpaiguri, Santipur, Nabadwip in stand alone mode and Ashoknagar-Kalyangarh & Habra in cluster mode

Ref: Your Memo No. SUDA-50/2016/1904 dt. 15.11.16

Sir,

With reference to the subject cited above I am sending herewith appraisal reports of four DPRs covering 5 non-KMA towns as listed below along with copy of DPRs for your kind perusal and taking further course of necessary action.

Sl. No.	Project	Appraised Amount (in lakh)
1.	Solid Waste Management Project under Jalpaiguri Municipality	1288.15
2.	Solid Waste Management Project under Nabadwip Municipality	1498.44
3.	Solid Waste Management Project under Shantipur Municipality	1819.14
4.	Solid Waste Management Project under Ashoknagar-Kalyangarh & Habra Municipality	3232.20

Yours faithfully,

Encl:- As stated above.


17.11.16
Chief Engineer, MED

APPRIASAL REPORT

1.	Name of the Project	Solid Waste Management Project under Jalpaiguri Municipality		
2.	Sectoral area	Urban		
3.	Total Financial outlay	1288.15 Lakh		
4.	Financial arrangement			
<i>Funds being made available by</i>				
	<i>Implementing agency</i>	<i>Gol Share</i>	<i>State Share</i>	<i>Others, if any(Addl. State share)</i>
	Jalpaiguri Municipality	450.85 Lakh	150.28 Lakh	687.02 Lakh
				1288.15 lakh
5.	Project duration (dates/months/years)	24 Months		
6.	Location of project	Jalpaiguri Municipality in Jalpaiguri District, West Bengal		
7.	Previous phases, if any	No		
8.	Statutory required	Clearance/Permission from concerned authority such as State Electricity Board, State Pollution Control Board (SPCB), Highways, PWD etc. (wherever applicable).		
9.	Statutory obtained	To be obtained after approval of the project by the ULB.		
10.	Details of Feasibility Studies done (if any)	The project is technically and financially feasible		
11.	Implementing agency	Jalpaiguri Municipality with technical assistance from MED, Govt. of West Bengal		
12.	Basic design of the project			
i)	Goals and Objectives	The main objective is conversion of waste to energy through generation of bio-gas, preparation of manure and proper management of recyclables.		
ii)	Activities involved	Collection, transportation, separation and production of Bio-gas, manure and selling of recyclables, sanitary land filling for inert as per relevant manuals and guidelines of Govt. of India.		
iii)	Outputs of the project	Waste free city with minimum discharge to landfills.		
iv)	Outcome of the project	The day to day hazards of waste mechanism will be addressed with due importance to socio-economic view points, as well the municipal revenue infrastructure will be soundly built in a new form.		
13.	Target population			
i)	As per Census 2011	107341		
ii)	Base Year (2018)	117316		
iii)	Intermediate Year (2028)	132256		
iv)	Final Year (2038)	148127		
14.	Per capita expenditure proposed			
i)	Considering Census population 2011	Rs. 1200.05		
ii)	Considering Base Year population (2018)	Rs. 1098.02		
15.	Quantitative and qualitative (verifiable) target Indicators	As per CPHEEO Manual published by MoUD, Govt. of India		
16.	Environmental sustainability of the project	The project does not affect the green belt. No tree is required to be cut. No water body is affected by the proposed project. No natural outlays are also affected by the proposed project. There is no possibility of soil erosion.		

17.	Land acquisition / Resettlement and Rehabilitation involved	Land already procured
18.	Operation and Maintenance	Jalpaiguri Municipality
19.	Finance Plus Criteria	
(i)	Innovations and piloting of new approaches	Waste to energy (Bio-gas)
(ii)	Innovations in financing and leveraging	Surplus income will be generated after meeting Operation and Maintenance costs.
20.	Whether the project is recommended for Sanction or not (Y/N).	Yes
21.	If not, please mention reasons and area for improving DPR.	Not Applicable
22.	Estimated cost for consideration & approval (INR Lakh)	Rs. 1288.15 Lakh


 Chief Engineer
 Municipal Engineering Directorate
 Govt. of West Bengal

APPRIASAL REPORT

1.	Name of the Project	Solid Waste Management Project under Nabadwip Municipality		
2.	Sectoral area	Urban		
3.	Total Financial outlay	1498.44 Lakh		
4.	Financial arrangement			
<i>Funds being made available by</i>				
	<i>Implementing agency</i>	<i>GoI Share</i>	<i>State Share</i>	<i>Others, if any(Addl. State share)</i>
	Nabadwip Municipality	524.45 Lakh	174.82 Lakh	799.17 Lakh
				1498.44 lakh
5.	Project duration (dates/months/years)	24 Months		
6.	Location of project	Nabadwip Municipality in Nadia District, West Bengal		
7.	Previous phases, if any	No		
8.	Statutory required	Clearance/Permission from concerned authority such as State Electricity Board, State Pollution Control Board (SPCB), Highways, PWD etc. (wherever applicable).		
9.	Statutory obtained	To be obtained after approval of the project by the ULB.		
10.	Details of Feasibility Studies done (if any)	The project is technically and financially feasible		
11.	Implementing agency	Nabadwip Municipality with technical assistance from MED, Govt. of West Bengal		
12.	Basic design of the project			
i)	Goals and Objectives	The main objective is conversion of waste to energy through generation of bio-gas, preparation of manure and proper management of recyclables.		
ii)	Activities involved	Collection, transportation, separation and production of Bio-gas, manure and selling of recyclables, sanitary land filling for inert as per relevant manuals and guidelines of Govt. of India.		
iii)	Outputs of the project	Waste free city with minimum discharge to landfills.		
iv)	Outcome of the project	The day to day hazards of waste mechanism will be addressed with due importance to socio-economic view points, as well the municipal revenue infrastructure will be soundly built in a new form.		
13.	Target population			
i)	As per Census 2011	125543		
ii)	Base Year (2018)	128339		
iii)	Intermediate Year (2028)	131585		
iv)	Final Year (2038)	133957		
14.	Per capita expenditure proposed			
i)	Considering Census population 2011	Rs. 1193.57		
ii)	Considering Base Year population (2018)	Rs. 1167.56		
15.	Quantitative and qualitative (verifiable) target Indicators	As per CPHEEO Manual published by MoUD, Govt. of India		

16.	Environmental sustainability of the project	The project does not affect the green belt. No tree is required to be cut. No water body is affected by the proposed project. No natural outlays are also affected by the proposed project. There is no possibility of soil erosion.
17.	Land acquisition / Resettlement and Rehabilitation involved	Land already procured
18.	Operation and Maintenance	Nabadwip Municipality
19.	Finance Plus Criteria	
(i)	Innovations and piloting of new approaches	Waste to energy (Bio-gas)
(ii)	Innovations in financing and leveraging	Surplus income will be generated after meeting Operation and Maintenance costs.
20.	Whether the project is recommended for Sanction or not (Y/N).	Yes
21.	If not, please mention reasons and area for improving DPR.	Not Applicable
22.	Estimated cost for consideration & approval (INR Lakh)	Rs. 1498.44 Lakh


 Chief Engineer
 Municipal Engineering Directorate
 Govt. of West Bengal

APPRIASAL REPORT

1.	Name of the Project	Solid Waste Management Project under Shantipur Municipality		
2.	Sectoral area	Urban		
3.	Total Financial outlay	1819.14 Lakh		
4.	Financial arrangement			
<i>Funds being made available by</i>				
	<i>Implementing agency</i>	<i>Gol Share</i>	<i>State Share</i>	<i>Others, if any(Addl. State share)</i>
	Shantipur Municipality	636.70 Lakh	212.23 Lakh	970.21 Lakh
				<i>Total</i> 1819.14 lakh
5.	Project duration (dates/months/years)	24 Months		
6.	Location of project	Shantipur Municipality in Nadia District, West Bengal		
7.	Previous phases, if any	No		
8.	Statutory required	Clearance/Permission from concerned authority such as State Electricity Board, State Pollution Control Board (SPCB), Highways, PWD etc. (wherever applicable).		
9.	Statutory obtained	To be obtained after approval of the project by the ULB.		
10.	Details of Feasibility Studies done (if any)	The project is technically and financially feasible		
11.	Implementing agency	Shantipur Municipality with technical assistance from MED, Govt. of West Bengal		
12.	Basic design of the project			
i)	Goals and Objectives	The main objective is conversion of waste to energy through generation of bio-gas, preparation of manure and proper management of recyclables.		
ii)	Activities involved	Collection, transportation, separation and production of Bio-gas, manure and selling of recyclables, sanitary land filling for inert as per relevant manuals and guidelines of Govt. of India.		
iii)	Outputs of the project	Waste free city with minimum discharge to landfills.		
iv)	Outcome of the project	The day to day hazards of waste mechanism will be addressed with due importance to socio-economic view points, as well the municipal revenue infrastructure will be soundly built in a new form.		
13.	Target population			
i)	As per Census 2011	151777		
ii)	Base Year (2018)	167897		
iii)	Intermediate Year (2028)	190611		
iv)	Final Year (2038)	213289		
14.	Per capita expenditure proposed			
i)	Considering Census population 2011	Rs. 1198.56		
ii)	Considering Base Year population (2018)	Rs. 1083.49		
15.	Quantitative and qualitative (verifiable) target Indicators	As per CPHEEO Manual published by MoUD, Govt. of India		

16.	Environmental sustainability of the project	The project does not affect the green belt. No tree is required to be cut. No water body is affected by the proposed project. No natural outlays are also affected by the proposed project. There is no possibility of soil erosion.
17.	Land acquisition / Resettlement and Rehabilitation involved	Land already procured
18.	Operation and Maintenance	Shantipur Municipality
19.	Finance Plus Criteria	
(i)	Innovations and piloting of new approaches	Waste to energy (Bio-gas)
(ii)	Innovations in financing and leveraging	Surplus income will be generated after meeting Operation and Maintenance costs.
20.	Whether the project is recommended for Sanction or not (Y/N).	Yes
21.	If not, please mention reasons and area for improving DPR.	Not Applicable
22.	Estimated cost for consideration & approval (INR Lakh)	Rs. 1819.14 Lakh


 Chief Engineer
 Municipal Engineering Directorate
 Govt. of West Bengal

APPRISAL REPORT

1.	Name of the Project	Solid Waste Management Project under Ashoknagar-Kalyangarh & Habra Municipality		
2.	Sectoral area	Urban		
3.	Total Financial outlay	3232.20 Lakh		
4.	Financial arrangement			
<i>Funds being made available by</i>				
	<i>Implementing agency</i>	<i>Gol Share</i>	<i>State Share</i>	<i>Others, if any(Addl. State share)</i>
	Ashoknagar-Kalyangarh & Habra Municipality	1131.27 Lakh	377.09 Lakh	1723.84 Lakh
				<i>Total</i>
				3232.20 lakh
5.	Project duration (dates/months/years)	24 Months		
6.	Location of project	Ashoknagar-Kalyangarh & Habra Municipality in North 24 Parganas District, West Bengal		
7.	Previous phases, if any	No		
8.	Statutory required	Clearance/Permission from concerned authority such as State Electricity Board, State Pollution Control Board (SPCB), Highways, PWD etc. (wherever applicable).		
9.	Statutory obtained	To be obtained after approval of the project by the ULB.		
10.	Details of Feasibility Studies done (if any)	The project is technically and financially feasible		
11.	Implementing agency	Ashoknagar-Kalyangarh & Habra Municipality with technical assistance from MED, Govt. of West Bengal		
12.	Basic design of the project			
i)	Goals and Objectives	The main objective is conversion of waste to energy through generation of bio-gas, preparation of manure and proper management of recyclables.		
ii)	Activities involved	Collection, transportation, separation and production of Bio-gas, manure and selling of recyclables, sanitary land filling for inert as per relevant manuals and guidelines of Govt. of India.		
iii)	Outputs of the project	Waste free city with minimum discharge to landfills.		
iv)	Outcome of the project	The day to day hazards of waste mechanism will be addressed with due importance to socio-economic view points, as well the municipal revenue infrastructure will be soundly built in a new form.		
13.	Target population			
i)	As per Census 2011	269133		
ii)	Base Year (2018)	292162		
iii)	Intermediate Year (2028)	332772		
iv)	Final Year (2038)	383014		
14.	Per capita expenditure proposed			
i)	Considering Census population 2011	Rs. 1200.97		
ii)	Considering Base Year population (2018)	Rs. 1106.30		
15.	Quantitative and qualitative (verifiable) target Indicators	As per CPHEEO Manual published by MoUD, Govt. of India		

16.	Environmental sustainability of the project	The project does not affect the green belt. No tree is required to be cut. No water body is affected by the proposed project. No natural outlays are also affected by the proposed project. There is no possibility of soil erosion.
17.	Land acquisition / Resettlement and Rehabilitation involved	Land already procured
18.	Operation and Maintenance	Ashoknagar-Kalyangarh & Habra Municipality
19.	Finance Plus Criteria	
(i)	Innovations and piloting of new approaches	Waste to energy (Bio-gas)
(ii)	Innovations in financing and leveraging	Surplus income will be generated after meeting Operation and Maintenance costs.
20.	Whether the project is recommended for Sanction or not (Y/N).	Yes
21.	If not, please mention reasons and area for improving DPR.	Not Applicable
22.	Estimated cost for consideration & approval (INR Lakh)	Rs. 3232.20 Lakh


 Chief Engineer
 Municipal Engineering Directorate
 Govt. of West Bengal

GOVERNMENT OF WEST BENGAL
OFFICE OF THE CHIEF ENGINEER
Municipal Engineering Directorate

BikashBhawan, South Block (1st Floor) Salt Lake, Kolkata – 700091

Phone No: (033)2337-1331/ (033)2358-3347 \ Fax: (033) 2337-5472 /2337-5474


E-mail: ce_medte@yahoo.com

No. ME/ 2146/1P-48/2015

Dated 9/12/16

From : The Chief Engineer
M. E. Dte.
Bikash Bhavan

✓ To : The Director,
SUDA,
ILGUS Bhaban, H.C.Block, Sector-III,
Salt Lake, Kolkata- 700 106.

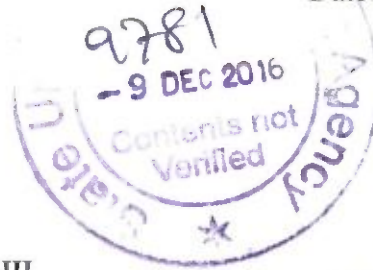

PM E
16/12/16

Sub: Appraisal report of Municipal Solid Waste Management Project within Krishnanagar Municipality

Ref : Memo no. BARC/NABTD/2016/3872 Dt. 05/12/16 of Bhaba Atomic Research Centre

Sir,

With reference to the subject cited above I am sending herewith appraisal report of MSWM project within Krishnanagar Municipality received from Dr. S.B.Ghosh, Scientific Officer, Nuclear Agriculture and Biotechnology Division, Bhaba Atomic Research Centre along with an additional report prepared from this end for your kind perusal and taking further course of necessary action.

This may kindly be noted that all suggestions may be incorporated to the project as far as possible at the time of actual execution.

Yours faithfully,

Encl : as stated

Chief Engineer, MED

Nis-3.

Dr. S B. Ghosh
SO/F, NABTD



Phone 022 25590375
Fax 022 25505326
ghoshsukh@gmail.com
sbghosh@barc.gov.in

Government of India
BHABHA ATOMIC RESEARCH CENTRE
NUCLEAR AGRICULTURE AND BIOTECHNOLOGY DIVISION
MUMBAI 400 085

Ref:BARC/NABTD/2016/J3 872

Date: 05/12/2016

To
The Chief Engineer,
Bikash Bhawan, South Block, Salt Lake,
Kolkata -700091

Sub: Review of Krishnanagar city SWM PR

Dear Sir,

Thank you very much for giving me this opportunity to review the DPR on solid waste management system for Krishnanagar city, West Bengal. I have gone through the document and my observations are as follows.

1. This document is quite comprehensive in nature and gives all relevant data. Although certain sub-sections may be improved in terms of emphasizing on segregation at source, the document in general has underlined the importance of segregation at source. All waste generators including shops and offices and households have to adopt source segregation.
2. Municipality may consider adjoining clearance of construction debris with issuing the completion/occupancy certificate of the project (Sec 4.2), i.e. if a builder is not clearing the debris, he will not get completion/occupancy certificate.
3. In page 43 the proposed layout for a 5 MT biogas plant is good enough for schematic and representation purpose but there are certain inaccuracies and will be rectified as and when those projects are implemented. For example the main digester capacity is insufficient for a 5 MT project. BARC is capable of providing those technical details as and when necessary MoU is signed between BARC and the appropriate body at West Bengal state government.
4. Technological comparison at page 48 is the crux of this document. Composting has limited small scale application and should be encouraged at the housing society and housing complex level. Any housing society that practices its own biodegradable solid waste processing by composting should be rewarded by giving some concession on municipal charges (municipal tax, water bill etc. etc.). Waste to energy projects in any form (incineration or syn gas) are not sustainable and almost all efforts in India have remained unsuccessful because of space, cost, ash disposal and air-pollution. Engineered land fills have not yet been built in India but from international data available, it seems they are much more costly affairs than biomethanation projects. The advantage of biomethanation

is that the value of methane and manure produced tilts the scale in favour of sustainability.

5. Taking the estimate of 43 MT biodegradable waste generation in Krishnanagar city per day, the proposal to set up 8 plants of 5 MTPD looks justified. Space required for each 5 MT biomethanation project is approximately 400-500 M². The document assumes all eight plants in one centralized location. I would strongly encourage the stake holders to think of establishing those plants in a distributed manner all over the city. This will eliminate large scale transportation of waste all over the city. Waste transportation is a nuisance to the citizens at large. The advantage of having all the plants in one location is that if one plant goes down, other plants can take the load if any spare capacity is available.

6. The economics of biomethanation given in the document is broadly in line with the estimate given by BARC. However, it may be fine tuned as explained here. 1 MT of waste can give enough gas to replace one and half (1 + ½) domestic LPG cylinder. In case electricity is produced using the biogas using a 30KVA genset attached to each 5 MTPD plant then everyday one should expect 400 units (KWH) net per day i.e. net of production of electricity and consumption of electricity to run the plant. Using a changeover switch one can run the plant in a grid neutral manner.

The conclusion of the document that biomethanation is the most appropriate technology to pursue in a place like Krishnanagar city for processing of biodegradable waste is a very logical one and should be followed actively.

Thanking you,
Sincerely,



S.B. Ghosh

वैज्ञानिक अधिकारी

Scientific Officer

नाभिकीय ऊर्जा विभाग, अणुसंशोधन केंद्र, टांबोरा

Nuclear Energy Division, Atomic Research Centre, Trombay

नाभिकीय ऊर्जा विभाग, अणुसंशोधन केंद्र, टांबोरा

Bhabha Atomic Research Centre,

ट्रांबोरी, मुंबई-४०० ०८५/Trombay, Mumbai-400 085.

ADDITIONAL REPORT ON SOLID WASTE MANAGEMENT PROJECT UNDER KRISHNANAGAR MUNICIPALITY

1.	Name of the Project	Solid Waste Management Project under Krishnanagar Municipality		
2.	Sectoral area	Urban		
3.	Total Financial outlay	1833.81 Lakh		
4.	Financial arrangement			
<i>Funds being made available by</i>				
	<i>Implementing agency</i>	<i>Gol Share</i>	<i>State Share</i>	<i>Others, if any(Addl. State share)</i>
	Krishnanagar Municipality	641.83 Lakh	213.94 Lakh	978.04 Lakh
				<i>Total</i> 1833.81 lakh
5.	Project duration (dates/months/years)	24 Months		
6.	Location of project	Krishnanagar Municipality in Nadia District, West Bengal		
7.	Previous phases, if any	No		
8.	Statutory required	Clearance/Permission from concerned authority such as State Electricity Board, State Pollution Control Board (SPCB), Highways, PWD etc. (wherever applicable).		
9.	Statutory obtained	To be obtained after approval of the project by the ULB.		
10.	Details of Feasibility Studies done (if any)	The project is technically and financially feasible		
11.	Implementing agency	Krishnanagar Municipality with technical assistance from MED, Govt. of West Bengal		
12.	Basic design of the project			
i)	Goals and Objectives	The main objective is conversion of waste to energy through generation of bio-gas , preparation of manure and proper management of recyclables.		
ii)	Activities involved	Collection, transportation, separation and production of Bio-gas, manure and selling of recyclables, sanitary land filling for inert as per relevant manuals and guidelines of Govt. of India.		
iii)	Outputs of the project	Waste free city with minimum discharge to landfills.		
iv)	Outcome of the project	The day to day hazards of waste mechanism will be addressed with due importance to socio-economic view points, as well the municipal revenue infrastructure will be soundly built in a new form.		
13.	Target population			
i)	As per Census 2011	153062		
ii)	Base Year (2018)	166546		
iii)	Intermediate Year (2028)	184940		
iv)	Final Year (2038)	202492		
14.	Per capita expenditure proposed			
i)	Considering Census population 2011	Rs. 1198.08		
ii)	Considering Base Year population (2018)	Rs. 1101.08		
15.	Quantitative and qualitative (verifiable) target Indicators	As per CPHEEO Manual published by MoUD, Govt. of India		

16.	Environmental sustainability of the project	The project does not affect the green belt. No tree is required to be cut. No water body is affected by the proposed project. No natural outlays are also affected by the proposed project. There is no possibility of soil erosion.
17.	Land acquisition / Resettlement and Rehabilitation involved	Land already procured
18.	Operation and Maintenance	Krishnanagar Municipality
19.	Finance Plus Criteria	
(i)	Innovations and piloting of new approaches	Waste to energy (Bio-gas)
(ii)	Innovations in financing and leveraging	Surplus income will be generated after meeting Operation and Maintenance costs.
20.	Whether the project is recommended for Sanction or not (Y/N).	Yes
21.	If not, please mention reasons and area for improving DPR.	Not Applicable
22.	Estimated cost for consideration & approval (INR Lakh)	Rs. 1833.81 Lakh


 109, 12, 16
 Chief Engineer
 Municipal Engineering Directorate
 Govt. of West Bengal



No. 69 /KMDA/DGO/WS- 196

Date : 17.11.2016

From : Shri R.M. Chatterjee,
Director General Operation,
WS and SD&SWM,
KMDA.



To : The Director,
SUDA & State Mission Director,
SBM(U).

Asst. Dir. (SBM)
[Signature]

Sub : Appraisal of DPRs of SWM Projects of Bhatpara & Naihati Municipality.

Ref : Letter SUDA-50/2016 dtd. 15.11.2016.

Sir,

With reference to above, enclosed please find herewith the appraisal report of DPR of the
aforenoted two municipalities for taking necessary further action in this respect.

Encl : As stated.

Yours faithfully,

[Signature]
R.M. Chatterjee,
Director General Operation,
WS and SD&SWM, KMDA.

Date : 17.11.2016

No. 69/1(3)/KMDA/DGO/WS- 196

Copy forwarded for information to :

- 1) The Chief Executive Officer, KMDA.
- 2) Sri Amit Das, Chief Engineer, MED. A copy of the appraisal is enclosed.
- 3) The Chief Engineer, SD&SWM Sector, KMDA.

R.M. Chatterjee,
Director General Operation,
WS and SD&SWM, KMDA

PME
[Signature]
[Signature]

Subject: Appraisal of Detailed Project Report on Solid Waste Management for **Naihati Municipality** Prepared by Senes Consultant India Pvt. Ltd. on behalf of **Naihati Municipality** .

KMDA has carried out the technical appraisal of the aforementioned DPR and appraisal comments of the DPR is stated below.

The problem of ineffective municipal solid waste management (MSWM) is prevailing in the urban environment of Naihati. DPR has been framed to achieve scientific management of the municipal solid waste in Naihati.

Naihati being an important growing municipality, it is very important to maintain cleanliness and environmental hygiene in the municipal area. Due to unavailability of suitable facilities for treatment and disposal of the large amount of MSW generated daily in Naihati, the waste generated is majorly dumped into the immediate vicinity and thereby necessitates management of the MSW to accommodate the changes in its quantity and quality and to ensure clean environment of the municipality.

DPR framed has considered the following major aspects for management of Solid Waste.

- Minimizing Waste
- Maximizing environmental friendly waste reuse and recycling
- Promoting environmental friendly waste disposal and treatment; and
- Extending the coverage of waste management services.

Naihati is one of the growing municipalities of North 24 Parganas, West Bengal. The municipality is spread over 11.55 sq.kms. As per census 2011, the municipality population is 2.21 lakhs. The growth rate is about 2.07% per annum. The municipal area is developing at a rapid pace and the population is expected to reach about 2.67 lakhs by the year 2020 and 2025 about 2.95 lakhs. Naihati Municipality is characterized by a pattern of multiple land uses. Residential use occupies about half the area and commercial zones occupy less than 2.5%. Naihati is plagued by problems of informal sector including slum development, illegal colonies and commercial activities. The total area developed for urban activities constitute about 65% of the city area. At present, there are slums having population about 41,363. Present average generation of waste is about 330 grams per capita per day which will increase to 375 grams per capita at the end of the year 2026.

Total waste generated at present in the municipal area is 92MT out of which the expected bio-degradable waste is 44MT and recyclable waste is 10 MT. The non bio degradable/ street sweeping/ drain cleaning/ building rubbish is around 38MT. Total waste to be processed at the engineered land fill is around 48MT out of which 10MT from inert waste from compost plant.

For the development of SWM in Naihati Municipality, the following components have been included:-

- Segregation of recyclable / non bio degradable waste at source by providing household/ community bins.
- Effective primary collection of waste
- Transportation of primary collected waste to secondary transfer station and compost plant.
- Cleaning of drains
- Processing of waste in compost plant by mechanical compost plant with windrow method together with engineered landfill.
- Movable vehicle at processing plant and landfill site.
- Beautification of the engineered landfill site with plantation of trees.

Naihati Municipality has 9.936 Acre vacant land wherein the mechanical compost plant of capacity 60 MT has been proposed in the DPR for installation taking into consideration 10 years population projection. The compost manure expected to be generated will be in the tune of 15 MT per day at the present. The land area available for engineered landfill 9.936 Acre which will have 10 years active life. Leachate generated will be reused in the windrows of the compost plant. Effective landfill gas management has also been included in the DPR.


The abstract cost for the system is included in the DPR is as follows:-


Sl. No.	Component	Amount in Lakhs (in INR)
1.	Primary Collection Equipment	189.02
2.	Secondary Collection Equipment's and Vehicles	215.27
3.	Processing Plant including Infrastructure and Sanitary Landfill	3262.50
4.	Movable Vehicle at Processing Plant and Landfill site	219.60
5.	Battery Operated Cart (2 nos. each ward: 62 nos. @ Rs.2.0 Lakhs each)	124.00
6.	Supplying and Planting of different plant/trees	10.00
	Total	4020.39

It has been observed that to ensure and encourage the aspect of segregation at source and also during transportation of segregated waste, necessary equipments has been included in the DPR to be provided to each of the household and also to the municipality. The segregated biodegradable waste will then been transferred to the processing plant in the form of mechanical compost and to be located in the campus of land fill site. The land available is away from habitation limit. The rejectable from the compost plant can be effectively disposed to land fill site with minimal transportation cost. Effective recyclable ^{material} ~~material~~ can also be organized at the transfer station at compost site.

The DPR appears to be a replica of the KSWMIP Project recently commissioned for 6 municipalities in Hooghly District under JICA finance and cost included is also comparable with the said Project.

The appraised DPR is recommended for consideration of approval by the appropriate committee under Swachh Bharat Mission (Urban).


Additional Chief Engineer,
SD & SWM Sector, KMDA


Chief Engineer,
SD & SWM Sector, KMDA

Subject: Appraisal of Detailed Project Report on Solid Waste Management for **Bhatpara Municipality** Prepared by Senes Consultant India Pvt. Ltd. on behalf of **Bhatpara Municipality** .

KMDA has carried out the technical appraisal of the aforementioned DPR and appraisal comments of the DPR is stated below.

The problem of ineffective municipal solid waste management (MSWM) is prevailing in the urban environment of Bhatpara. DPR was framed to achieve scientific management of the municipal solid waste in Bhatpara.

Bhatpara being an important growing municipality, it is very important to maintain cleanliness and environmental hygiene in the municipal area. Due to unavailability of suitable facilities for treatment and disposal of the large amount of MSW generated daily in Bhatpara, the waste generated is majorly dumped into the immediate vicinity and thereby necessitate management of the MSW to accommodate the changes in its quantity and quality and to ensure clean environment of the municipality.

DPR framed has considered the following major aspects for management of Solid Waste.

- Minimizing Waste
- Maximizing environmental friendly waste reuse and recycling
- Promoting environmental friendly waste disposal and treatment; and
- Extending the coverage of waste management services.

Bhatpara is one of the growing municipalities of North 24 Parganas, West Bengal. The municipality is spread over 32.55 sq.kms. As per census 2011, the municipality population is 3.86 lakhs. The growth rate is about 2.00% per annum. The municipal area is developing at a rapid pace and the population is expected to reach about 4.29 lakhs by the year 2019 and 2025 about 4.536 lakhs. Bhatpara Municipality is characterized by a pattern of multiple land uses. Residential use occupies about half the area and commercial zones occupy less than 2.5%. Bhatpara is plagued by problems of informal sector including slum development, illegal colonies and commercial activities. The total area developed for urban activities constitute about 65% of the city area. At present, there are 93 slums having populations about 1.05 Lakhs. Present average generation of waste is about 320 grams per capita per day which will be about 365 grams per capita at the end of the year 2026.

Total waste generated at present in the municipal area is 160 MT out of which the expected bio-degradable waste is 78 MT and recyclable waste is 20 MT. The non bio degradable/ street sweeping/ drain cleaning/ building rubbish is around 62 MT. Total waste to be processed at the engineered land fill is around 80 MT out of which 18 MT from inert waste from compost plant.

For the development of SWM in Bhatpara Municipality, the following components have been included:-

- Segregation of recyclable / non bio degradable waste at source by providing household/ community bins.

- Effective primary collection of waste
- Transportation of primary collected waste to secondary transfer station and compost plant.
- Cleaning of drains
- Processing of waste in compost plant by mechanical compost plant with windrow method together with engineered landfill.
- Movable vehicle at processing plant and landfill site.
- Beautification of the engineered landfill site with plantation of trees.

Bhatpara Municipality has 10.50 Acre vacant land wherein the mechanical compost plant of capacity 95MT has been proposed in the DPR for installation taking into consideration 10 years projection. The compost manure expected to be generated will be in the tune of 20MT per day at the present. The land area available for engineered landfill 10.50 Acre which will have 10 years active life. Leachate generated will be reused in the windrows of the compost plant. Effective landfill gas management has also been included in the DPR.


The abstract cost for the system is included in the DPR is as follows:-


Sl. No.	Component	Amount in Lakhs (in INR)
1.	Primary Collection Equipment	446.16
2.	Secondary Collection Equipment's and Vehicles	338.87
3.	Processing Plant including Infrastructure and Sanitary Landfill	2737.10
4.	Movable Vehicle at Processing Plant and Landfill site	219.60
5.	Battery Operated Cart (2 nos. each ward: 62 nos. @ Rs.2.0 Lakhs each)	124.00
6.	Movable compactor with tip cart mechanism and Operation and Maintenance of the compactor for 3 years	257.00
7.	Supplying and Planting of different plant/trees	8.03
	Total	4181.76

It has been observed that to ensure and encourage the aspect of segregation at source and also during transportation of segregated waste, necessary equipments has been included in the DPR to be provided to each of the household and also to the municipality. The segregated biodegradable waste will then be transferred to the processing plant in the form of mechanical compost and to be located in the campus of land fill site. The land available is away from habitation limit. The rejectable from the compost plant can be effectively disposed to land fill site with minimal transportation cost. Effective recyclable ^{material} ~~material~~ can also be organized at the transfer station at compost site.

The DPR appears to be a replica of the KSWMIP Project recently commissioned for 6 municipalities in Hooghly District under JICA finance and cost included is also comparable with the said Project.

The appraised DPR is recommended for consideration of approval by the appropriate committee under Swachh Bharat Mission (Urban).


Additional Chief Engineer,
SD & SWM Sector, KMDA


Chief Engineer,
SD & SWM Sector, KMDA